



PRUSZKÓW

SOCHACZEW

ul. INŻYNIERSKA 28
96-502 SOCHACZEW
Tel.: +48 46 863 16 26
Fax.: +48 46 863 17 02
E-mail: poczta@zurawie.com.pl

www.sarens.pl



RADOM

Tel.: +48 48 363 10 36
Fax.: +48 48 340 00 43
E-mail: logistyka@sarens.pl

DEMAG TC1200

250 TON

1/150

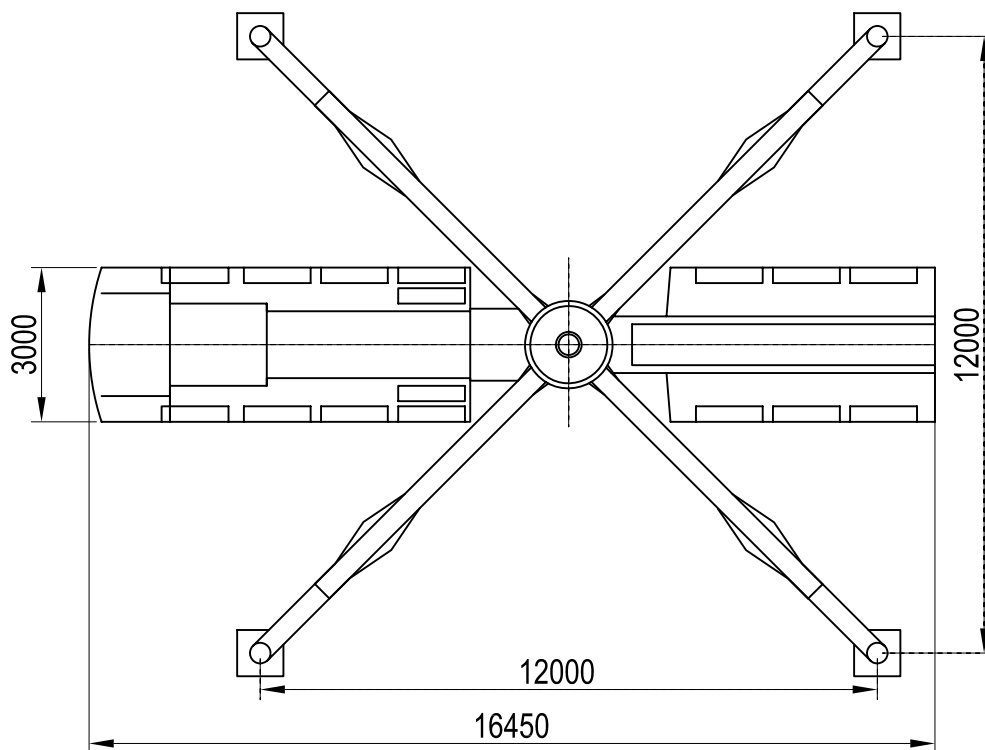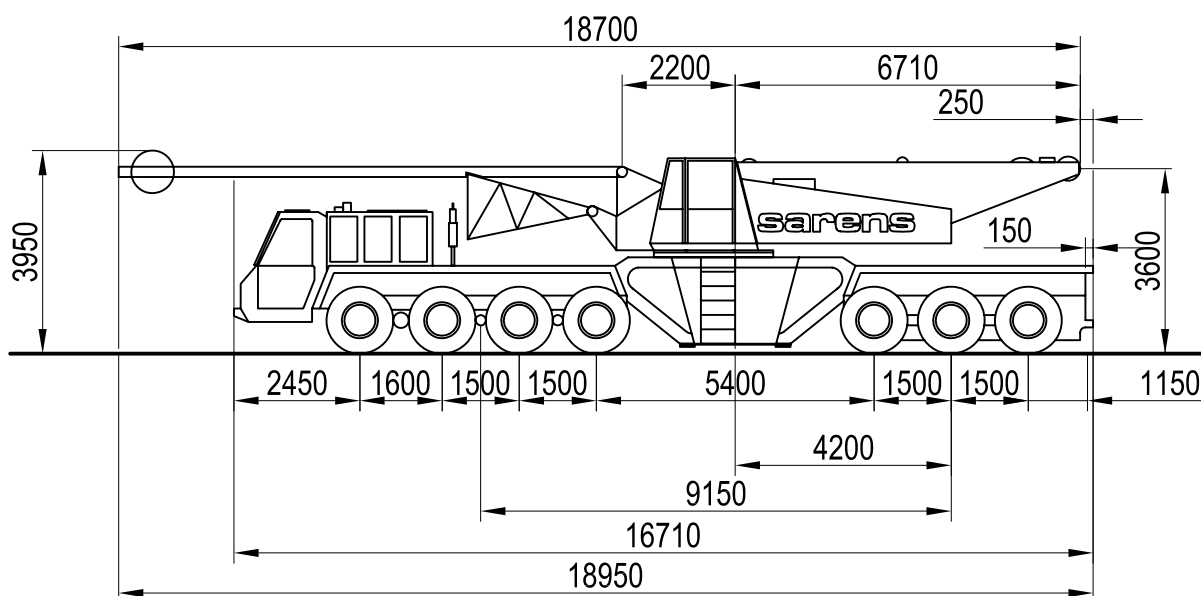



DEMAG TC1200

250TON

UDŹWIGI

 90t		12 X 12 m		KONFIGURACJA: SH		360°		75%								
Promień pracy		Długość wysięgnika głównego												Promień pracy		
m		12		18		24		30		36		42		48		
		H	Q	H	Q	H	Q	H	Q	H	Q	H	Q	H	Q	
m		m	t	m	t	m	t	m	t	m	t	m	t	m	t	m
6		16	250	17.5	250	—	—	—	—	—	—	—	—	—	—	6
7		15	230	17	229	24.5	228	30.5	227	36.5	210	—	—	—	—	7
8		14	199	16.5	197	24	196	30	196	36	195	41.5	180	—	—	8
9		13.5	175	16	173	23	172	29.8	171	35.5	171	41.1	170	47.8	160	9
10		13	155	15.5	154	22.5	153	29.3	152	35.1	152	41	151	47.5	150	10
11		12.5	140	15	139	22	138	29	137	34.8	136	40.8	135	47.1	135	11
12		12	126	14	125	21.5	124	28.5	123	34.3	122	40.5	121	47	121	12
14		—	—	12	105	20.5	104	28	103	34.5	102	40	102	46.5	101	14
16		—	—	11.5	90.4	19	89.4	27	88.5	33.2	87.9	39.2	86.9	46	86.2	16
18		—	—	11	79.4	17	78.3	26	77.4	32.4	76.5	38.5	75.7	45.2	75	18
20		—	—	—	—	15	69.5	24.3	68.6	31.5	67.7	37.8	66	44.5	66.2	20
22		—	—	—	—	12	62.5	23	61.5	30	60.6	37	59.8	43.5	59.1	22
24		—	—	—	—	—	—	20.5	55.7	28	54.8	35.5	54	42.6	53.2	24
26		—	—	—	—	—	—	18	50.9	26	49.9	34	49.1	41.5	48.3	26
28		—	—	—	—	—	—	15	46.8	24	45.8	32	44.9	40	44.2	28
30		—	—	—	—	—	—	—	—	21.5	42.3	30.5	41.4	38.5	40.6	30
34		—	—	—	—	—	—	—	—	—	—	26	35.1	35.5	34.5	34
38		—	—	—	—	—	—	—	—	—	—	20	30.1	31	29.4	38
42		—	—	—	—	—	—	—	—	—	—	—	—	26	25.5	42

 90t		 12 X 12 m		KONFIGURACJA: SH		360°		75%				Promień pracy				
Promień pracy		Długość wysięgnika głównego												m		
m		54		60		66		72		78			84		90	
m		H	Q	H	Q	H	Q	H	Q	H	Q	H	Q	H	Q	m
m		m	t	m	t	m	t	m	t	m	t	m	t	m	t	m
9		53	140	—	—	—	—	—	—	—	—	—	—	—	—	9
10		52.5	134	59	120	65	95	71.5	77	77.6	65	—	—	—	—	10
11		52.3	127	58.9	115	64.5	90	71.2	75	77.4	62.5	81.2	53	87.2	47	11
12		51.9	120	58.7	110	64	86.5	71.1	72.8	77	60	81.1	50.8	87.1	44.3	12
14		51.4	100	58.5	98.8	63.5	80.7	71	68.8	76.7	56.7	80.8	46.5	86.9	40.6	14
16		51	85.6	58	84.9	63.1	76.6	70.5	65.1	76.3	52.9	80.6	43.2	86.4	37.1	16
18		50.4	74.4	57.5	73.7	62.9	73	70	61.6	76	49.9	80.4	39.8	86	34	18
20		50	65.6	57	64.9	62.6	64.2	69.5	58.3	75.7	46.1	80.1	37.5	85.7	31.5	20
22		49	58.5	56.4	57.8	62	57.1	69	55.2	75.1	44.1	79.9	35.2	85.2	29.3	22
24		48.2	52.6	55.6	51.9	61.2	51.3	68.4	50.8	74.6	41.6	79.2	33.1	84.8	27.3	24
26		47	47.7	54.4	47	60.8	46.3	67.1	45.9	73.4	39.3	78.7	31.1	83.9	25.4	26
28		46	43.5	53.2	42.8	59.4	42.2	66.8	41.7	73	37.1	77.8	29.3	83.4	23.7	28
30		45	40	52.8	39.2	58.6	38.8	66.1	38.1	72.6	35.3	77.2	27.7	83	22.1	30
34		41.8	33.9	50.5	33.3	56.8	32.7	64.2	32.2	71	31.4	76	24.8	81.5	19.5	34
38		38	28.8	47	28.2	53.5	27.6	61.6	27.2	68.5	26.6	74	22.3	80	17.2	38
42		34	24.8	44	24.2	51.5	23.6	59.5	23.2	66.5	22.5	72	20	78	15.2	42
46		28	21.7	40.5	21	47.6	20.4	56.4	20	64.4	19.3	69	18.1	76	13.3	46
50		—	—	34.4	18.5	43.5	17.8	53.5	17.4	60.8	16.7	66.5	16.1	73.2	11.5	50
54		—	—	27.2	16.4	38.2	15.7	49	15.2	57	14.4	63.6	13.8	71	9.5	54
58		—	—	—	—	30.5	14	43.6	13.3	53	12.5	59.5	11.8	66.8	7.9	58
62		—	—	—	—	—	—	36.5	11.7	48.5	10.9	56	10.2	63.5	6.5	62
66		—	—	—	—	—	—	—	—	44	9.5	50.5	8.8	58.5	5.3	66
70		—	—	—	—	—	—	—	—	35.5	8.3	45	7.5	54	4.2	70



DEMAG TC1200

250TON

UDŹWIGI

 90t		 12 X 12 m		KONFIGURACJA: SW		360°		75%					
Promień pracy		Długość wysięgnika głównego 18m										Promień pracy	
		Długość wysięgnika pomocniczego											
		18		24		30		36		42			
m		H	Q	H	Q	H	Q	H	Q	H	Q	m	
m		m	t	m	t	m	t	m	t	m	t	m	
12		34.8	100	42	97.4	48	79.4	—	—	—	—	12	
14		33.2	100	40	92.6	47	76.4	53.5	58.6	—	—	14	
16		31.5	83	38.3	83.3	45	73.2	52	57	59.5	45.4	16	
18		29	70.7	37	70.8	43.5	70.5	50.5	54.9	57.5	44.7	18	
20		26.5	61.3	36.1	61.4	43	61.2	49.5	52.8	56.6	44	20	
22		—	—	34	54.2	42.2	53.9	48.6	50.8	55.5	43.2	22	
24				31.5	48.3	40	48.1	47.5	47.8	54.4	42.4	24	
26				28.5	43.5	38	43.4	46.4	43.1	53.5	41.6	26	
28				—	—	35.5	39.4	44	39.1	52	38.6	28	
30						32	36.1	42.5	35.8	51.1	35.3	30	
34						—	—	40	30.4	47	30	34	
38								37.5	26.3	42.6	25.9	38	
42								—	—	36	22.6	42	

 90t		 12 X 12 m		KONFIGURACJA: SW		360°		75%		
Promień pracy	m	Długość wysięgnika głównego 18m								Promień pracy
		Długość wysięgnika pomocniczego								
		48		54		60		66		
		H	Q	H	Q	H	Q	H	Q	
m	m	t	t	m	t	m	t	m	t	m
18	64.5	32.8	—	—	—	—	—	—	—	18
20	63.1	31.9	70.5	23.2	75.3	20.4	—	—	—	20
22	62	31	68.2	22.6	74.7	19.3	82	17.4	—	22
24	61	30.1	67.8	22	73.9	18.6	80.6	16.4	—	24
26	60.1	29.3	66.9	21.4	73.1	17.8	79.7	15.6	—	26
28	59	28.6	66	20.8	72.3	17	78.7	14.6	—	28
30	58.1	27.6	65.1	20.3	71.6	16.1	78	13.8	—	30
34	55.2	26.7	62.6	19.4	69.2	15.2	76.4	12.4	—	34
38	51.5	25.5	59.2	18.5	66.8	14.3	73.2	11.2	—	38
42	47.2	22.3	56.1	17.6	64	13.4	71.7	10.3	—	42
46	40.1	19.7	51.4	16.7	60.2	12.7	68.2	9.4	—	46
50	34.2	17.5	45.4	15.8	56	12	65	8.6	—	50
54	—	—	37	15	50.4	11.3	60.6	8.2	—	54
58	—	—	—	—	41.5	10.6	55.7	7.4	—	58



DEMAG TC1200

250TON

UDŹWIGI

90t		12 X 12 m		KONFIGURACJA:		360°	75%		
Promień pracy		Długość wysięgnika głównego 24m		Długość wysięgnika pomocniczego				Promień pracy	
		18		24		30		36	
		H	Q	H	Q	H	Q	H	Q
m	m	m	t	m	t	m	t	m	t
12	41	100	47	89.1	—	—	—	—	—
14	38.2	97	45.9	83.6	53	70.6	59	55.2	—
16	37.2	84.5	44.3	78.5	51.5	67.2	57.7	53.7	65
18	35	71.8	43.2	73.7	50.5	64.2	56.8	52.2	64.5
20	32.5	62.4	41.6	64.4	49	61.2	56	50.7	63.1
22	—	—	39.5	56.8	48	57.3	55	49.3	62.6
24	—	—	37.4	50.8	46	51.1	53.3	47.3	61.2
26	—	—	33.1	45.9	44	46	52	45.7	60.4
28	—	—	—	—	41.8	41.8	50.4	41.5	58.3
30	—	—	—	—	40	38.2	48.5	38	57.5
34	—	—	—	—	—	—	43.7	32.3	53.4
38	—	—	—	—	—	—	37	27.8	49
42	—	—	—	—	—	—	—	—	43

90t		12 X 12 m		KONFIGURACJA:		360°	75%		
Promień pracy		Długość wysięgnika głównego 24m		Długość wysięgnika pomocniczego				Promień pracy	
		48		54		60		66	
		H	Q	H	Q	H	Q	H	Q
m	m	m	t	m	t	m	t	m	t
18	71	32	—	—	—	—	—	—	—
20	69	31.5	76	23.5	82	19.9	—	—	—
22	68.2	30.7	75	22.9	81.5	19.3	88	16.1	—
24	67.6	30	74.1	22.4	80.5	18.7	87.1	15.5	—
26	66.7	29.3	73.7	21.9	80	18.1	86.6	14.8	—
28	65.4	28.6	72	21.4	78.3	17.5	85.3	14.1	—
30	64.2	27.9	71.5	20.8	77.9	16.9	84.9	13.5	—
34	61.6	26.6	69	19.8	76.4	15.8	83.1	12.3	—
38	57.5	25.3	66	18.7	73.5	14.7	80.6	11.2	—
42	54	23.7	62.9	17.8	71.3	13.6	78.8	10.3	—
46	47.3	20.9	58.2	16.8	67.1	12.6	75.5	9.3	—
50	43	18.6	52.6	15.8	63.1	11.8	71.8	8.4	—
54	—	—	44	15	58.2	11	67.6	7.7	—
58	—	—	—	—	49	10.4	61.8	7	—
62	—	—	—	—	—	—	55	6.5	—



DEMAG TC1200

250TON

UDŹWIGI

 90t		 12 X 12 m		KONFIGURACJA:		360°		75%				
		Długość wysięgnika głównego 30m SW										
		Długość wysięgnika pomocniczego										
Promień pracy	m	18		24		30		36		42		Promień pracy
		H	Q	H	Q	H	Q	H	Q	H	Q	
m		m	t	m	t	m	t	m	t	m	t	m
10		49	100	—	—	—	—	—	—	—	—	10
12		47.2	94.1	54	82	—	—	—	—	—	—	12
14		46.1	88.9	52.5	77.4	58.5	65.3	67	51.5	—	—	14
16		44.4	84.5	51.8	72.8	58	62.5	64.7	50.3	72	40.1	16
18		42.6	73	50	68.6	56.8	59.8	63.4	49.1	70.2	39.8	18
20		40	63.3	48.6	65.1	56.1	57.3	63	47.8	69.2	39.4	20
22		—	—	46.8	57.5	54.9	54.9	62.1	46.5	68.5	39	22
24				43.5	51.3	53.1	52.1	61	45.2	67.7	38.5	24
26				41	46.3	51.6	47	59.2	43.8	66.5	38.1	26
28				—	—	49	42.7	57.2	42.4	65.2	37.6	28
30						46	39.1	56.5	39.3	63.5	37.2	30
34						—	—	51.5	33.5	60.5	33	34
38								43	29.1	55	28.5	38
42								—	—	50	24.9	42

 90t		 12 X 12 m		KONFIGURACJA: SW		360°		75%			
		Długość wysięgnika głównego 30m									
		Długość wysięgnika pomocniczego									
Promień pracy	m	48		54		60		66		Promień pracy	m
		H	Q	H	Q	H	Q	H	Q		
m		m	t	m	t	m	t	m	t		m
18		78	30.8	—	—	—	—	—	—		18
20		76.5	30.3	84	23.2	—	—	—	—		20
22		75.5	29.9	82	22.7	89	18.9	96	15.6		22
24		74.5	29	80.5	22.1	87.8	18.3	94.2	15		24
26		73.5	28.4	79.2	21.6	86.6	17.7	93.2	14.5		26
28		72.4	27.8	78.3	21.2	85.4	17.2	92.4	14		28
30		71.5	27.3	77.8	20.7	84.4	16.7	91.7	13.3		30
34		68.4	26	75	19.7	82.6	15.6	90	12.3		34
38		65	24.8	72.6	18.7	80	14.6	87.6	11.2		38
42		61.4	23.8	69	18.3	77.4	13.5	85.3	10.3		42
46		55	21.7	64	16.9	74.2	12.6	82.5	9.4		46
50		47	19.3	58.3	15.9	69.1	11.8	78.4	8.5		50
54		—	—	51	15	65.5	11.1	75	7.7		54
58		—	—	—	—	56.5	10.4	68.4	7		58
62		—	—	—	—	48	9.8	64	6.6		62



DEMAG TC1200

250TON

UDŹWIGI

 90t		 12 X 12 m		KONFIGURACJA:		360°	75%				
				Długość wysięgnika głównego 36m		SW					
				Długość wysięgnika pomocniczego							
Promień pracy	m	18		24		30		36		42	Promień pracy
		H	Q	H	Q	H	Q	H	Q		
m	m	t	m	t	m	t	m	t	m	t	m
10	54	90.6	—	—	—	—	—	—	—	—	10
12	52	86.7	59	75.7	—	—	—	—	—	—	12
14	50.6	82.3	57	71.7	65	60	—	—	—	—	14
16	49	78.1	56.2	67.4	63	57.9	71	46.9	77	37.6	16
18	46.5	74.2	54.6	64	61.6	55.7	68.4	45.9	76	37.3	18
20	43.6	64.2	53.2	60.9	61	53.6	68.1	44.8	75	37	20
22	42	56.5	51.8	58.1	59.1	51.7	67.2	43.6	73.4	36.5	22
24	—	—	49	51.9	58	49.6	66	42.5	72.6	36.1	24
26			45	46.8	56	47.5	65	41.3	71.8	35.7	26
28			—	—	53.4	43.1	62.6	40.1	70.8	35.2	28
30					53	39.5	61.2	38.8	69	34.6	30
34					—	—	56	36.2	66	33.5	34
38							49	29.3	61	29	38
42							—	—	54	25.5	42

 90t		 12 X 12 m		KONFIGURACJA: SW		360°		75%			
		Długość wysięgnika głównego 36m									
		Długość wysięgnika pomocniczego									
Promień pracy	m	48		54		60		66		Promień pracy	m
		H	Q	H	Q	H	Q	H	Q		
m	m	m	t	m	t	m	t	m	t	m	m
18		82	29.3								18
20		81	28.8	88	22.6	—	—	—	—		20
22		80.2	28.3	87	22.2	94	18.2	101	14.8		22
24		79.1	27.9	86.2	21.8	93	17.7	99	14.4		24
26		78.7	27.3	85.4	21.3	92.5	17.3	98.4	13.9		26
28		77.6	26.8	84.2	20.9	91.3	16.8	97.3	13.5		28
30		76.6	26.4	83.1	20.4	90.6	16.4	96.9	13		30
34		73.5	25.3	81.1	19.6	88.4	15.5	95.4	12.1		34
38		70.6	24.4	78	18.8	85.8	14.6	93.2	11.3		38
42		66	23.5	75	17.9	83.2	13.7	91.1	10.4		42
46		60	22.1	70	17	79.4	12.8	88	9.5		46
50		54	19.6	64.9	16.1	75	11.9	84	8.6		50
54		—	—	58	15.2	70.1	11.1	80	7.7		54
58				—	—	63	10.4	75.1	7		58
62						50	9.8	70	6.5		62



DEMAG TC1200

250TON

UDŹWIGI

 90t		 12 X 12 m		KONFIGURACJA: SW		360°		75%			
Promień pracy		Długość wysięgnika głównego 42m								Promień pracy	
		Długość wysięgnika pomocniczego									
		24		30		36		42			
m		H	Q	H	Q	H	Q	H	Q	m	
12	m	65	68	—	—	—	—	—	—	12	m
14		63.6	65.1	71	54.5	—	—	—	—	14	
16		63.2	62.3	70	52.8	76.5	43.3	83	34.8	16	
18		61.8	59.6	69.1	51.1	76	42.5	81.8	34.5	18	
20		60.8	57.2	68	49.4	75	41.6	81	34.1	20	
22		58.4	54.7	66.8	47.8	73.5	40.6	80	33.7	22	
24		56	52.5	65	46.3	72.6	39.8	79.1	33.2	24	
26		52	47.3	63.8	44.7	71.4	38.8	78.2	32.9	26	
28		50	43	61	43.4	69.2	37.8	76.8	32.4	28	
30		—	—	59	39.8	67.6	36.8	75.3	31.9	30	
34		—	—	—	—	62.8	34	71.8	30.9	34	
38		—	—	—	—	55	29.5	67	29.2	38	
42		—	—	—	—	—	—	63	25.7	42	

 90t		 12 X 12 m		KONFIGURACJA: SW		360°		75%			
Promień pracy		Długość wysięgnika głównego 42m								Promień pracy	
		Długość wysięgnika pomocniczego									
		48		54		60		66			
m		H	Q	H	Q	H	Q	H	Q	m	
m		m	t	m	t	m	t	m	t	m	
18		88	27.6	—	—	—	—	—	—	18	
20		87.4	27.3	94	21.8	—	—	—	—	20	
22		86.8	26.8	93	21.5	100	17.3	—	—	22	
24		86.2	26.4	92.1	21.2	99	17	106	13.5	24	
26		85.1	26	91.2	20.9	98.4	16.5	105	13.1	26	
28		84	25.7	90.3	20.6	97.9	16.1	104.1	12.6	28	
30		83.1	25.3	89.1	20.2	97.2	15.7	103.6	12.1	30	
34		80	24.4	87.2	19.4	95	15	101.8	11.2	34	
38		76.8	23.7	84	18.5	92.7	14.1	100	10.5	38	
42		72.5	22.9	80.8	17.8	90	13.4	97.3	9.7	42	
46		65.8	22.1	76	17	86.8	12.6	94	9	46	
50		59	20.2	70	16	82.4	12	91.1	8.4	50	
54		—	—	65	15.1	77.2	11.4	86.4	7.8	54	
58		—	—	—	—	70	11	81.7	7.3	58	
62		—	—	—	—	62	10.5	75.8	6.7	62	
66		—	—	—	—	—	—	68	6.1	66	



DEMAG TC1200

250TON

UDŹWIGI

 90t		 12 X 12 m		KONFIGURACJA: SW		360°		75%			
Promień pracy		Długość wysięgnika głównego 48m								Promień pracy	
		Długość wysięgnika pomocniczego									
		24		30		36		42			
m		H	Q	H	Q	H	Q	H	Q	m	
m		m	t	m	t	m	t	m	t	m	
12		71	61	—	—	—	—	—	—		12
14		70.2	58.7	76	49.5	—	—	—	—		14
16		69.6	56.3	75.2	48.2	82	39.6	—	—		16
18		68.2	54.1	74	46.8	81	38.8	87	31.6		18
20		66.8	52	73.2	45.4	80.2	38.1	86	31.3		20
22		64.2	50	71.8	44.1	79.4	37.3	85.2	31		22
24		62.1	48	70.4	42.7	78.2	36.5	84.8	30.6		24
26		58.4	46.2	68.4	41.4	76.3	35.7	83.7	30.2		26
28		55	43.4	65	40.1	75.8	34.9	82.6	29.8		28
30		—	—	63.1	39	73.2	34.1	81.2	29.4		30
34		—	—	55	34.2	69	32.7	78.1	28.4		34
38		—	—	—	—	61	29.7	73.1	27.5		38
42		—	—	—	—	—	—	67	25.8		42

 90t		 12 X 12 m		KONFIGURACJA: SW		360°		75%			
Promień pracy		Długość wysięgnika głównego 48m								Promień pracy	
		Długość wysięgnika pomocniczego									
		48		54		60		66			
m		H	Q	H	Q	H	Q	H	Q	m	
m		m	t	m	t	m	t	m	t	m	
18		95	26	—	—	—	—	—	—		18
20		94.1	25.7	100	20.6	—	—	—	—		20
22		93.1	25.3	99.1	20.5	105	16.3	—	—		22
24		92.2	25.1	98.8	20.3	104.4	16	112	12.6		24
26		91.2	24.8	98	20.1	103.5	15.6	111.1	12.3		26
28		90.1	24.5	96.8	19.9	102.8	15.3	110.3	11.9		28
30		88.4	24.2	96	19.5	102	15	109.8	11.4		30
34		86.2	23.5	93.2	19	100	14.4	108	10.9		34
38		82.8	22.8	90.4	18.3	97.8	13.8	105.9	10.3		38
42		78.2	21.9	87.8	17.5	95.4	13.2	103.4	9.7		42
46		71.6	21.1	83.1	16.7	91.2	12.5	100.5	9.1		46
50		66	20.1	77	15.9	86.8	11.9	96.8	8.5		50
54		—	—	71	15	81.2	11.2	93.1	7.9		54
58		—	—	—	—	74	10.5	86.8	7.3		58
62		—	—	—	—	65	9.8	82	6.7		62
66		—	—	—	—	—	—	74	6.1		66



DEMAG TC1200

250TON

UDŹWIGI

 90t		 12 X 12 m		KONFIGURACJA: SW		360°		75%			
Promień pracy	m	Długość wysięgnika głównego 48m								Promień pracy	
		Długość wysięgnika pomocniczego									
		24		30		36		42			
		H	Q	H	Q	H	Q	H	Q		
m		m	t	m	t	m	t	m	t	m	
12		71	61	—	—	—	—	—	—	—	12
14		70.2	58.7	76	49.5	—	—	—	—	—	14
16		69.6	56.3	75.2	48.2	82	39.6	—	—	—	16
18		68.2	54.1	74	46.8	81	38.8	87	31.6	—	18
20		66.8	52	73.2	45.4	80.2	38.1	86	31.3	—	20
22		64.2	50	71.8	44.1	79.4	37.3	85.2	31	—	22
24		62.1	48	70.4	42.7	78.2	36.5	84.8	30.6	—	24
26		58.4	46.2	68.4	41.4	76.3	35.7	83.7	30.2	—	26
28		55	43.4	65	40.1	75.8	34.9	82.6	29.8	—	28
30		—	—	63.1	39	73.2	34.1	81.2	29.4	—	30
34		—	—	55	34.2	69	32.7	78.1	28.4	—	34
38		—	—	—	—	61	29.7	73.1	27.5	—	38
42		—	—	—	—	—	—	67	25.8	—	42

 90t		 12 X 12 m		KONFIGURACJA: SW		360°		75%		
Promień pracy	m	Długość wysięgnika głównego 48m								Promień pracy
		Długość wysięgnika pomocniczego								
		48		54		60		66		
		H	Q	H	Q	H	Q	H	Q	
m		m	t	m	t	m	t	m	t	m
18		95	26	—	—	—	—	—	—	18
20		94.1	25.7	100	20.6	—	—	—	—	20
22		93.1	25.3	99.1	20.5	105	16.3	—	—	22
24		92.2	25.1	98.8	20.3	104.4	16	112	12.6	24
26		91.2	24.8	98	20.1	103.5	15.6	111.1	12.3	26
28		90.1	24.5	96.8	19.9	102.8	15.3	110.3	11.9	28
30		88.4	24.2	96	19.5	102	15	109.8	11.4	30
34		86.2	23.5	93.2	19	100	14.4	108	10.9	34
38		82.8	22.8	90.4	18.3	97.8	13.8	105.9	10.3	38
42		78.2	21.9	87.8	17.5	95.4	13.2	103.4	9.7	42
46		71.6	21.1	83.1	16.7	91.2	12.5	100.5	9.1	46
50		66	20.1	77	15.9	86.8	11.9	96.8	8.5	50
54		—	—	71	15	81.2	11.2	93.1	7.9	54
58		—	—	—	—	74	10.5	86.8	7.3	58
62		—	—	—	—	65	9.8	82	6.7	62
66		—	—	—	—	—	—	74	6.1	66



DEMAG TC1200

250TON

UDŹWIGI

90t		12 X 12 m		KONFIGURACJA: SW		360°	75%		
		Długość wysięgnika głównego 54m		Długość wysięgnika pomocniczego					
Promień pracy	m	24		30		36		42	
		H	Q	H	Q	H	Q	H	Q
		m	t	m	t	m	t	m	t
12		77	56.4	—	—	—	—	—	—
14		76.1	54.7	83.5	45.5	—	—	—	—
16		75.2	53.1	83	44.5	88	37.2	—	—
18		73.6	51.5	82.4	43.5	87.6	36.5	93.5	29.3
20		72.5	49.9	81.7	42.6	87.1	35.9	93	28.9
22		70.8	48.3	80.8	41.6	86.6	35.3	92.3	28.6
24		68	46.7	79	40.5	86	34.6	91.8	28.4
26		64.3	45.1	77.4	39.7	85.1	33.9	91.2	28
28		60.2	40.9	75	38.6	83.3	33.3	90.2	27.7
30		—	—	73.2	37.5	82.4	32.7	88.7	27.4
34		—	—	63	33.7	77.9	30.2	85.8	26.6
38		—	—	—	—	68	28.7	81.1	25.8
42		—	—	—	—	—	—	73.5	24.1

90t		12 X 12 m		KONFIGURACJA: SW		360°	75%		
		Długość wysięgnika głównego 54m		Długość wysięgnika pomocniczego					
Promień pracy	m	48		54		60		66	
		H	Q	H	Q	H	Q	H	Q
		m	t	m	t	m	t	m	t
18		100	24.1	—	—	—	—	—	—
20		99.5	23.9	106	19.2	—	—	—	—
22		99	23.6	105.5	19	112.5	15.4	—	—
24		98.2	23.3	105	18.8	112	15.2	119	12.3
26		97.7	23.1	104.4	18.6	111.2	15.1	118	12.1
28		96.3	22.9	103.2	18.5	110.1	14.9	117	11.8
30		95.7	22.6	102.4	18.2	109.2	14.7	116.1	11.5
34		92.8	22.1	100.2	18	107	14.3	114.2	11.2
38		88.9	21.6	97.1	17.6	104.6	13.9	111.9	10.7
42		85.4	21	94.1	17.3	102.4	13.4	110	10.1
46		80.6	19.9	90	16.7	98.5	12.9	106.9	9.5
50		70.8	18.8	85.1	16.2	95	12.4	103.5	9
54		—	—	75	15.6	89	11.8	100.1	8.4
58		—	—	—	—	82.5	11.1	95	7.8
62		—	—	—	—	72	10.4	89.7	7.2
66		—	—	—	—	—	—	79.6	6.6



DEMAG TC1200

250TON

UDŹWIGI

 90t		 12 X 12 m		KONFIGURACJA: SW		360°		75%			
Promień pracy		Długość wysięgnika głównego 60m								Promień pracy	
		Długość wysięgnika pomocniczego									
		30		36		42		48			
m		H	Q	H	Q	H	Q	H	Q	m	
m		m	t	m	t	m	t	m	t	m	
14		89	38.9	—	—	—	—	—	—	14	
16		88.5	38	95	32.4	—	—	—	—	16	
18		88	37.1	94.4	31.7	101	26	—	—	18	
20		87.4	36.2	93.8	31	100.5	25.7	107	21.5	20	
22		86.6	35.4	92.6	30.4	99.8	25.3	106.5	21.2	22	
24		85.2	34.5	91.4	29.8	99	24.9	105.8	20.9	24	
26		83.2	33.4	90.2	29.2	98.1	24.5	104.5	20.7	26	
28		81.1	32.4	88.6	28.6	96.4	24.2	103.4	20.5	28	
30		78.5	31.5	87	28	95.3	23.7	102.2	20.2	30	
34		69.5	29.3	82.4	26.6	91.6	23	100	19.8	34	
38		—	—	75	25.3	87.1	22.1	96.4	19.2	38	
42		—	—	—	—	82.1	21	91.8	18.6	42	
46		—	—	—	—	71	19.9	86.5	17.8	46	
50		—	—	—	—	—	—	79	17	50	

 90t		 12 X 12 m		KONFIGURACJA: SW		360°		75%			
Promień pracy		Długość wysięgnika głównego 60m								Promień pracy	
		Długość wysięgnika pomocniczego									
		54		60		66					
m		H	Q	H	Q	H	Q			m	
m		m	t	m	t	m	t			m	
20		113	17.5							20	
22		112.5	17.4	118	13.9	—	—			22	
24		112	17.3	117.5	13.8	124	10.9			24	
26		111.2	17.2	117	13.7	123.5	10.7			26	
28		110.6	17.1	116.4	13.6	123	10.5			28	
30		109.2	16.9	115.9	13.5	122.4	10.4			30	
34		107.1	16.7	114.4	13.3	121	10			34	
38		104.2	16.3	112	13.1	118.3	9.7			38	
42		101.8	15.8	109	12.7	116.4	9.2			42	
46		97.4	15.3	105.8	12.3	113.3	8.8			46	
50		92.3	14.7	102	11.7	110.4	8.4			50	
54		84	13.9	96.6	11.1	106.2	7.9			54	
58		—	—	83.6	10.4	101.4	7.5			58	
62				81	9.5	96	6.8			62	
66				—	—	87	6.2			66	



DEMAG TC1200

250TON

UDŹWIGI

 90t		 12 X 12 m		KONFIGURACJA: SW		360°		75%			
Promień pracy		Długość wysięgnika głównego 66m								Promień pracy	
		Długość wysięgnika pomocniczego									
		30		36		42		48			
m		H	Q	H	Q	H	Q	H	Q	m	
m		t	t	t	t	t	t	t	t	m	
14		96	34.3	—	—	—	—	—	—	—	14
16		95.2	33.6	101	28.5	—	—	—	—	—	16
18		94.1	32.9	100.4	28	106	23.2	—	—	—	18
20		93.2	32.1	99.8	27.4	105.3	22.9	112	19.2	—	20
22		92.4	31.2	98.6	26.8	104.8	22.6	111.4	19.1	—	22
24		90.8	30.5	97.5	26.2	104.1	22.3	110.8	19	—	24
26		89	29.7	96.4	25.7	103	22	110	18.9	—	26
28		86.8	28.9	94.6	25.1	101.8	21.6	108.4	18.7	—	28
30		85	28	93	24.6	100.7	21.3	107.8	18.5	—	30
34		76	25.9	88.4	23.5	97.6	20.6	105	18	—	34
38		—	—	81.5	22.3	92.5	19.6	102	17.6	—	38
42		—	—	—	—	87.6	18.5	98.1	17	—	42
46		—	—	—	—	76.5	17.4	92.8	16.3	—	46
50		—	—	—	—	—	—	83	15.6	—	50

 90t		 12 X 12 m		KONFIGURACJA: SW		360°		75%			
Promień pracy		Długość wysięgnika głównego 66m								Promień pracy	
		Długość wysięgnika pomocniczego									
		54		60		66					
m		H	Q	H	Q	H	Q			m	
m		m	t	m	t	m	t			m	
20		118	15.9	—	—	—	—			20	
22		117.5	15.8	124	12.6	—	—			22	
24		117	15.7	123.2	12.5	130.5	10			24	
26		116.4	15.7	122.6	12.4	130	9.9			26	
28		115.3	15.6	121.8	12.3	129.1	9.8			28	
30		114.6	15.5	121.1	12.1	128.3	9.7			30	
34		112.5	15.3	119	11.9	126.8	9.3			34	
38		109.8	15	116.8	11.8	124.4	9			38	
42		106.7	14.6	114	11.6	122.1	8.7			42	
46		102.4	14.1	111	11.3	119.2	8.4			46	
50		97.2	13.6	106.4	11	116.1	8.1			50	
54		89.5	12.9	101.8	10.5	112	7.8			54	
58		—	—	94.7	9.9	107.1	7.4			58	
62				86	9.1	102.1	6.8			62	
66				—	—	94	6.2			66	



DEMAG TC1200

250TON

UDŹWIGI

 90t		 12 X 12 m		KONFIGURACJA: SW		360°		75%			
Promień pracy		Długość wysięgnika głównego 72m								Promień pracy	
		Długość wysięgnika pomocniczego									
		30		36		42		48			
m		H	Q	H	Q	H	Q	H	Q	m	
m		m	t	m	t	m	t	m	t	m	
14		101.5	29.2	—	—	—	—	—	—	14	
16		101	28.6	106.5	24.9	—	—	—	—	16	
18		100.1	28.1	106	24.5	113	20.6	—	—	18	
20		99	27.5	105.4	24.1	112.4	20.3	118	16.8	20	
22		97.8	26.9	104.2	23.7	111.3	20.1	117.4	16.7	22	
24		96.2	16.3	103.1	23.3	110.2	19.9	116.8	16.6	24	
26		95	25.7	102.3	22.9	109.3	19.6	116	16.5	26	
28		93.1	25.1	100.7	22.4	108.2	19.3	115.1	16.3	28	
30		90.6	24.4	99	21.9	107.3	19	114.2	16.1	30	
34		81.5	23.1	95.1	20.8	104	18.3	111.8	15.9	34	
38		—	—	86.5	19.7	100.1	17.5	108.4	15.5	38	
42		—	—	—	—	95.2	16.5	105	15.1	42	
46		—	—	—	—	85	15.3	100.1	14.6	46	
50		—	—	—	—	—	—	91.5	13.9	50	

 90t		 12 X 12 m		KONFIGURACJA: SW		360°		75%			
Promień pracy		Długość wysięgnika głównego 72m								Promień pracy	
		Długość wysięgnika pomocniczego									
		54		60		66					
m		H	Q	H	Q	H	Q			m	
m		m	t	m	t	m	t			m	
22		123.5	13.8	130.5	11.2	—	—			22	
24		123	13.8	130	11.2	136.5	8.9			24	
26		122.2	13.7	129.1	11.1	136	8.9			26	
28		121.6	13.6	128.4	11	135.4	8.8			28	
30		121	13.5	127.6	10.9	134.8	8.7			30	
34		119.1	13.4	125.4	10.8	133.1	8.5			34	
38		116	13.2	123.2	10.7	131	8.3			38	
42		113.2	13	120.8	10.5	128.8	8.2			42	
46		109	12.6	117.1	10.3	125.7	8			46	
50		104.1	12.3	113.1	10.1	123	7.8			50	
54		96.2	11.7	108.6	9.7	118.8	7.5			54	
58		85.5	10.9	102.3	9.1	114	7.3			58	
62		—	—	92.5	8.5	109.1	6.9			62	
66		—	—	—	—	99.5	6.4			66	



DEMAG TC1200

250TON

UDŹWIGI

 90t		 12 X 12 m		KONFIGURACJA: SW		360°	75%				
		Długość wysięgnika głównego 78m									
		Długość wysięgnika pomocniczego									
Promień pracy	m	30		36		42		48		Promień pracy	
		H	Q	H	Q	H	Q	H	Q		
m		m	t	m	t	m	t	m	t	m	
14		107	24.8	113	21.7	—	—	—	—	14	
16		106.4	24.7	112.2	21.4	118	18	—	—	16	
18		105.3	24.5	111.6	21.1	117	17.8	124	14.6	18	
20		104	24.3	110.8	21	116.9	17.6	123	14.5	20	
22		103	24	109.7	20.8	116.2	17.4	122.8	14.4	22	
24		101.4	23.7	108.6	20.7	115.5	17.3	121.9	14.4	24	
26		99.2	23.4	106.8	20.5	114.2	17.1	121	14.3	26	
28		97.6	22.7	105.7	20.1	113	17	120	14.3	28	
30		89	22	101.2	19.6	110	16.6	117.6	14.2	30	
34		—	—	95	18.8	105.8	16.2	114.1	14	34	
38		—	—	—	—	101.2	15.5	111.2	13.7	38	
42		—	—	—	—	89	14.9	105.8	13.3	42	
46		—	—	—	—	—	—	97	12.8	46	

 90t		 12 X 12 m		KONFIGURACJA: SW		360°	75%	
		Długość wysięgnika głównego 78m						
		Długość wysięgnika pomocniczego						
Promień pracy	m	54		60		66		Promień pracy
		H	Q	H	Q	H	Q	
m		m	t	m	t	m	t	m
22		130	12.1	138	10	—	—	22
24		129.5	12.1	137	9.9	144	8.2	24
26		128.7	12	136.1	9.8	142.8	8.2	26
28		127.5	11.9	135.1	9.7	141.2	8.1	28
30		126.8	11.8	134.2	9.6	140.7	8	30
34		125	11.8	132.4	9.5	139.2	7.9	34
38		122	11.7	130	9.4	137.1	7.8	38
42		119	11.6	128.1	9.3	135	7.8	42
46		115.2	11.3	124.2	9.2	132.3	7.7	46
50		110.4	11	121.1	9.1	124.2	7.6	50
54		104.2	10.6	116	8.8	120.1	7.4	54
58		90	10.2	109.8	8.6	115.8	7.2	58
62		—	—	103	8.2	110	6.8	62
66		—	—	—	—	99.5	6.4	66



DEMAG TC1200

250TON

UDŹWIGI

ZBLOCZE HAKOWE

Udźwig	Liczba krążków	Ciężar zblocza
250 t	12	3800 kg
100 t	6	2400 kg
25 t	1	1160 kg