






sarens
group

www.sarens.com

FAUN RTF 40-3

40 TON

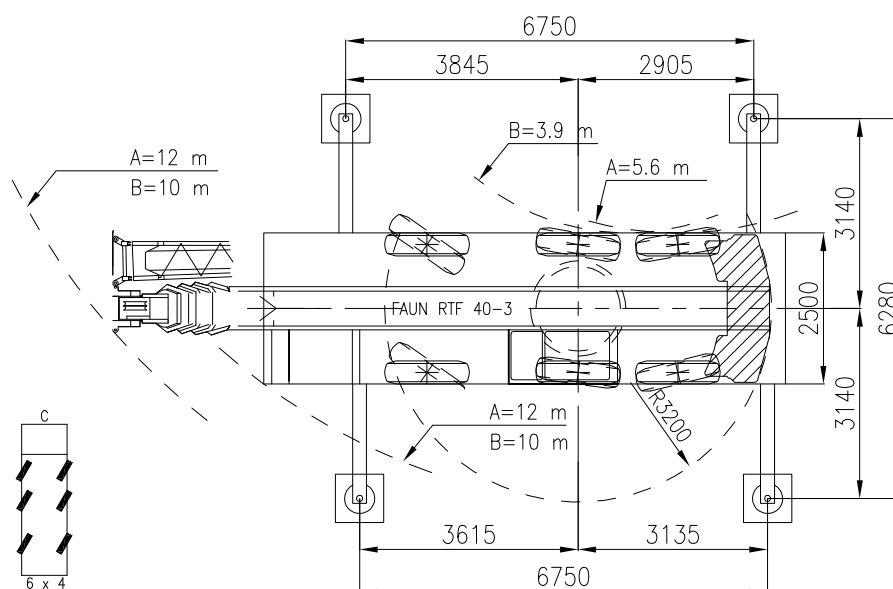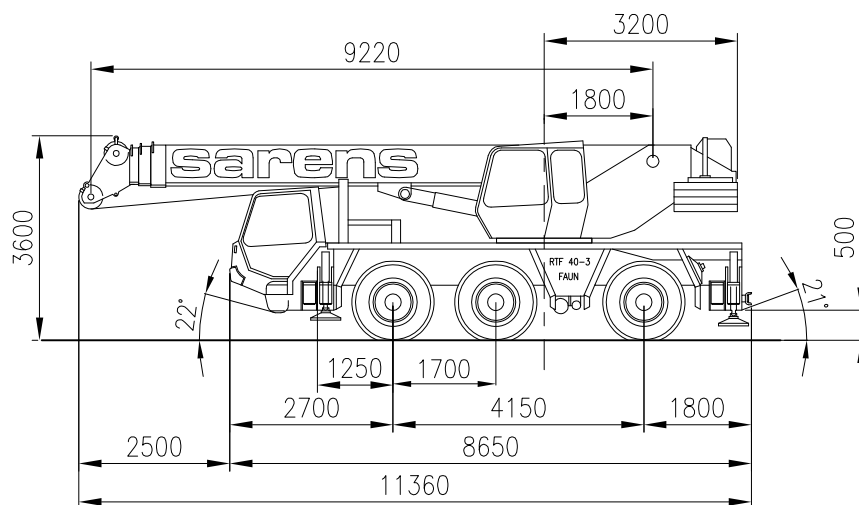

Axle load / Charge par essieu / Achslast / Aslast

Total weight / Poids total / Gesamtgewicht / Totaal gewicht

Tyres / Pneus / Bereifung / Banden

: 3 x 12 t

: 36 t

: 16.00 R 25

(= 7.5 t)

(= 7.5 t)

nothing too heavy, nothing too high






FAUN RTF 40-3

Working ranges
Portées

40 TON

Arbeitsbereiche
Werkbereich

T + TK

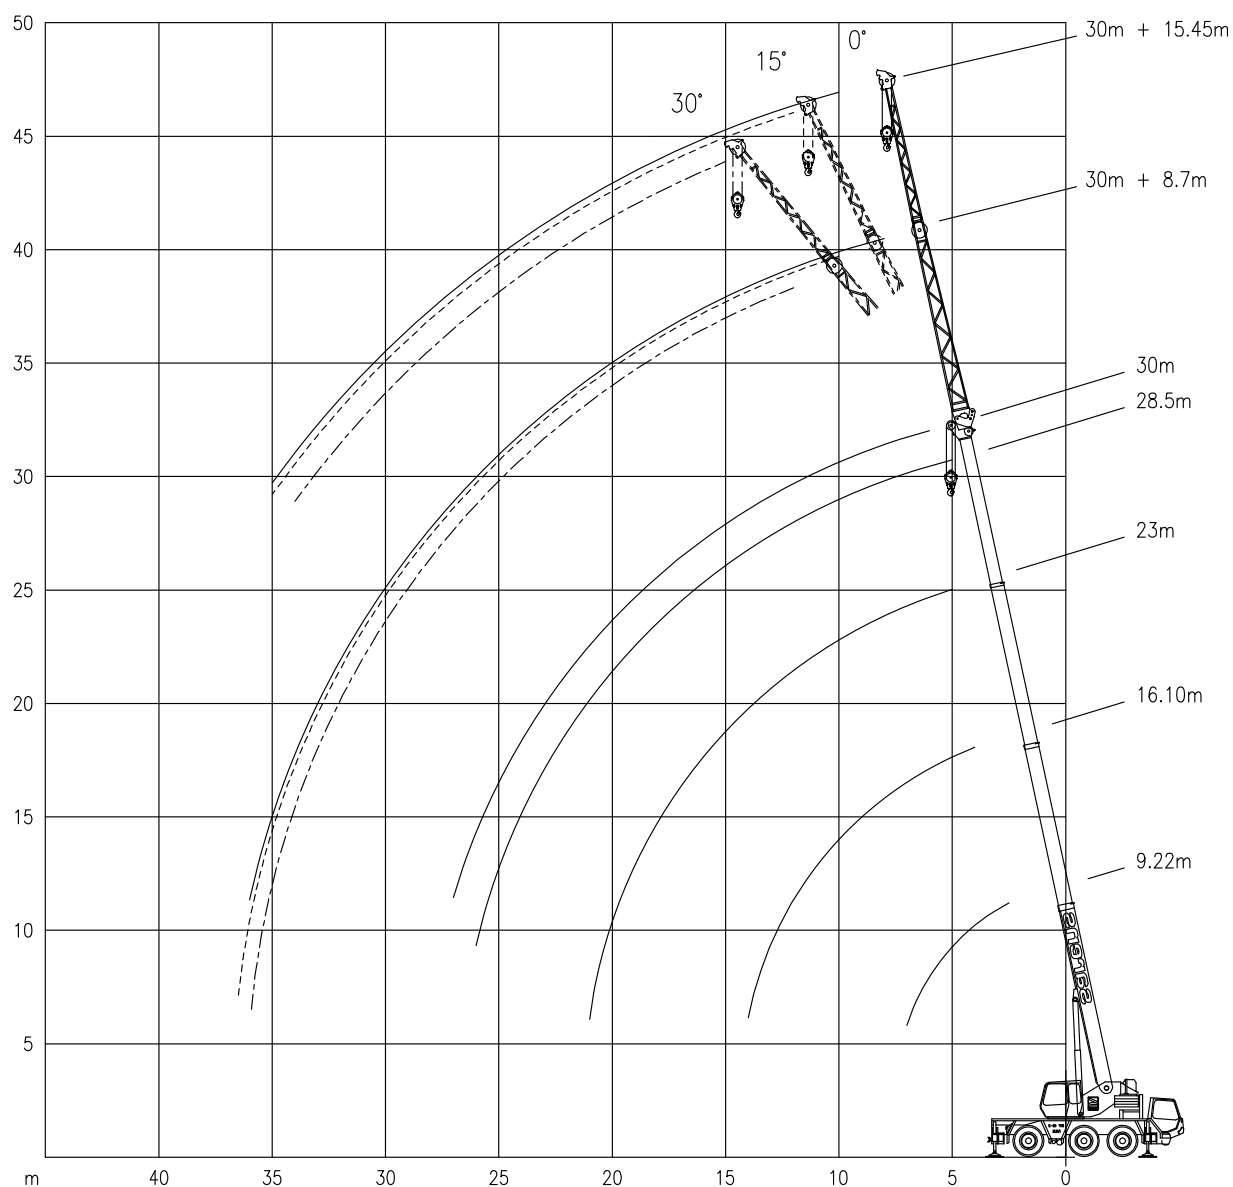




FAUN RTF 40-3



Lifting capacities
Capacités

40 TON

Tragfähigkeiten
Capacités




T




DIN
ISO

75%

	9.22 m	16.10 m	23.00 m	28.50 m	30.00 m	9.22 m	16.10 m	23.00 m	28.50 m	30.00 m
m	t	t	t	t	t	t	t	t	t	t
2.5	40.0	-	-	-	-	40.0	-	-	-	-
3.0	35.0	-	-	-	-	35.0	-	-	-	-
3.5	31.7	-	-	-	-	31.5	-	-	-	-
4.0	29.0	22.0	-	-	-	28.8	22.0	-	-	-
4.5	26.5	22.0	-	-	-	26.0	22.0	-	-	-
5.0	23.8	22.0	15.0	11.0	-	23.4	22.0	15.0	11.0	-
6.0	19.6	19.3	15.0	11.0	10.0	19.2	18.9	15.0	11.0	10.0
7.0	16.6	16.2	14.0	11.0	10.0	15.5	15.6	14.0	11.0	10.0
8.0	-	14.0	12.6	10.5	9.7	-	12.3	12.1	10.5	9.7
9.0	-	12.2	10.9	10.0	9.3	-	10.1	9.8	10.0	9.3
10.0	-	10.7	9.8	9.1	8.7	-	8.4	8.2	8.6	8.7
11.0	-	9.5	8.7	8.3	8.0	-	7.1	6.9	7.4	7.5
12.0	-	8.5	7.9	7.6	7.4	-	6.2	6.0	6.4	6.5
13.0	-	7.7	7.2	7.0	6.8	-	5.4	5.2	5.6	5.7
14.0	-	7.0	6.6	6.4	6.3	-	4.7	4.5	4.9	5.0
15.0	-	-	6.0	5.9	5.8	-	-	3.9	4.3	4.4
16.0	-	-	5.5	5.4	5.5	-	-	3.4	3.8	3.9
17.0	-	-	4.9	5.0	5.1	-	-	3.0	3.4	3.5
18.0	-	-	4.4	4.7	4.7	-	-	2.6	3.0	3.1
19.0	-	-	3.9	4.3	4.3	-	-	2.3	2.7	2.8
20.0	-	-	3.5	3.9	4.0	-	-	2.0	2.4	2.5
21.0	-	-	3.2	3.6	3.7	-	-	1.7	2.1	2.3
22.0	-	-	-	3.2	3.3	-	-	-	1.9	2.0
23.0	-	-	-	2.9	3.0	-	-	-	1.7	1.8
24.0	-	-	-	2.6	2.8	-	-	-	1.5	1.6
25.0	-	-	-	2.4	2.5	-	-	-	1.3	1.4
26.0	-	-	-	2.2	2.3	-	-	-	1.2	1.3
27.0	-	-	-	-	2.1	-	-	-	-	1.1



T



DIN
ISO

75%

	9.22 m !*	16.1 m !*	9.22 m !*	9.22 m	16.1 m !*	16.1 m
m	0°	0°	0°	360°	0°	360°
2.5	15.1	-	t	t	t	t
3.0	15.1	-	14.6	10.0	-	-
3.5	13.4	-	14.6	9.2	-	-
4.0	12.0	12.0	13.0	7.8	-	-
4.5	10.8	10.8	11.6	6.8	11.5	6.9
5.0	9.8	9.8	10.4	5.9	10.5	6.0
6.0	8.1	8.2	9.4	5.2	9.5	5.3
7.0	7.0	7.0	7.9	4.1	8.0	4.2
8.0	-	6.0	6.7	3.2	6.8	3.3
9.0	-	5.2	-	-	5.8	2.7
10.0	-	4.6	-	-	4.9	2.2
11.0	-	4.0	-	-	4.0	1.7
12.0	-	3.6	-	-	3.3	1.3
13.0	-	3.1	-	-	2.7	0.9
14.0	-	2.7	-	-	2.3	0.6
			-	-	1.9	0.4

!* Over rear / En arrière / Nach hinten / Over achterzijde.




FAUN RTF 40-3



Lifting capacities
Capacités

40 TON

Tragfähigkeiten
Capacités




TK



m	9.22 m → 30.0 m					
	8.7 m			15.45 m		
	0°	15 °	30°	0°	15 °	30°
8.0	4.70	-	-	-	-	-
9.0	4.57	-	-	-	-	-
10.0	4.41	3.42	-	2.60	-	-
11.0	4.27	3.31	-	2.60	-	-
12.0	4.14	3.20	2.58	2.59	1.84	-
13.0	4.00	3.11	2.52	2.46	1.80	-
14.0	3.87	3.02	2.46	2.26	1.75	-
15.0	3.73	2.93	2.41	2.12	1.68	1.42
16.0	3.59	2.85	2.36	2.01	1.61	1.38
17.0	3.45	2.77	2.31	1.95	1.54	1.32
18.0	3.32	2.69	2.27	1.89	1.47	1.26
19.0	3.17	2.62	2.22	1.84	1.43	1.20
20.0	2.97	2.55	2.16	1.80	1.39	1.14
21.0	2.83	2.47	2.10	1.73	1.35	1.10
22.0	2.69	2.39	2.05	1.67	1.31	1.07
23.0	2.55	2.31	2.01	1.60	1.26	1.04
24.0	2.41	2.23	1.97	1.53	1.22	1.02
25.0	2.31	2.15	1.93	1.47	1.18	0.99
26.0	2.21	2.05	1.89	1.41	1.14	0.96
27.0	2.11	1.97	1.86	1.36	1.11	0.93
28.0	2.01	1.90	1.83	1.32	1.08	0.91
29.0	1.80	1.83	1.77	1.27	1.05	0.89
30.0	1.65	1.77	1.72	1.23	1.03	0.88
31.0	1.50	1.60	1.65	1.18	1.00	0.86
32.0	1.35	1.45	1.45	1.14	0.97	0.84
33.0	1.25	1.30	1.30	1.09	0.94	0.82
34.0	1.10	1.15	1.15	1.05	0.91	0.81
35.0	1.00	1.05	1.00	1.00	0.88	0.79
36.0	0.90	0.95	-	0.96	0.86	0.78
37.0	-	-	-	0.91	0.83	0.76
38.0	-	-	-	0.85	0.80	0.74
39.0	-	-	-	0.75	0.77	0.72
40.0	-	-	-	0.65	0.74	0.70
41.0	-	-	-	0.55	0.65	0.65
42.0	-	-	-	0.45	0.55	0.50
43.0	-	-	-	0.35	0.40	-

m	9.22 m → 30.0 m					
	8.7 m			15.45 m		
	0°	15 °	30°	0°	15 °	30°
4.70	-	-	-	-	-	-
4.57	-	-	-	-	-	-
4.41	3.42	-	-	2.60	-	-
4.27	3.31	-	-	2.60	-	-
4.14	3.20	2.58	-	2.59	1.84	-
4.00	3.11	2.52	-	2.46	1.80	-
3.87	3.02	2.46	-	2.26	1.75	-
3.73	2.93	2.41	-	2.12	1.68	1.42
3.59	2.85	2.36	-	2.01	1.61	1.38
3.45	2.77	2.31	-	1.95	1.54	1.32
3.20	2.69	2.27	-	1.89	1.47	1.26
2.85	2.62	2.22	-	1.84	1.43	1.20
2.60	2.55	2.16	-	1.80	1.39	1.14
2.35	2.47	2.10	-	1.73	1.35	1.10
2.10	2.20	2.05	-	1.67	1.31	1.07
1.90	2.00	2.01	-	1.60	1.26	1.04
1.70	1.80	1.90	-	1.53	1.22	1.02
1.50	1.60	1.75	-	1.47	1.18	0.99
1.35	1.45	1.55	-	1.41	1.14	0.96
1.20	1.30	1.40	-	1.35	1.11	0.93
1.05	1.15	1.25	-	1.20	1.08	0.91
0.90	1.00	1.10	-	1.05	1.05	0.89
0.80	0.90	0.95	-	0.95	1.03	0.88
0.70	0.80	0.80	-	0.85	1.00	0.86
0.60	0.65	0.65	-	0.75	0.90	0.84
0.50	0.55	0.55	-	0.60	0.75	0.82
0.40	0.45	0.45	-	0.50	0.65	0.75
0.30	0.35	0.35	-	0.40	0.55	0.65
-	-	-	-	0.30	0.45	0.55
-	-	-	-	-	0.35	0.45
-	-	-	-	-	-	0.35
-	-	-	-	-	-	-
-	-	-	-	-	-	-

Hook Block / Crane hook Crochet mouflé / Crochet simple



Capacity Capacité Tragfähigkeit Capaciteit	Number of sheaves Nombre de poulies Anzahl der Rollen Aantal schijven	Number of lines Nombre de brins Strangzahl Aantal parten	Weight Poids Gewicht Gewicht	"B"
SWL 32 t	3	7	350 kg	2.6 m
SWL 4 t	-	1	75 kg	1.9 m

Unterflasche / Hakengehänge Kraanblok / Kraanhaak