




sarens
group

www.sarens.com

TEREX CC 2600 H

500 TON

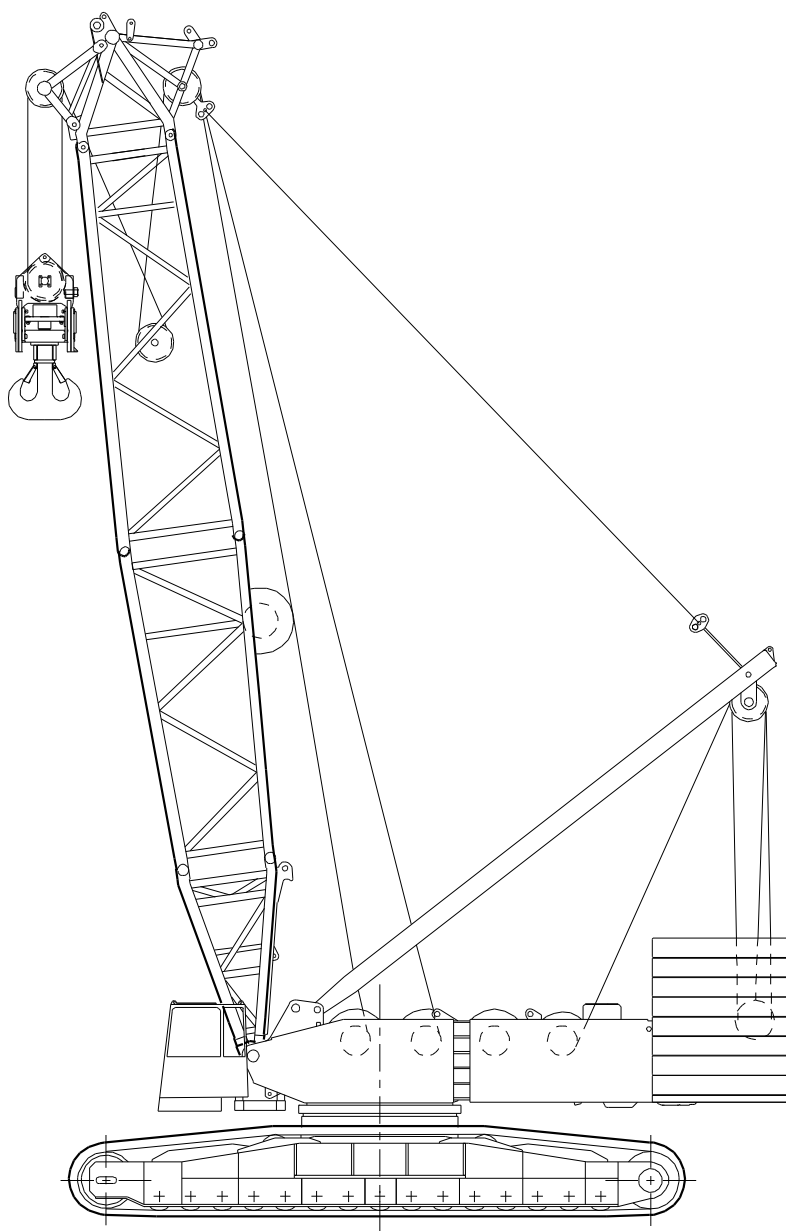

nothing too heavy, nothing too high







TEREX CC 2600 H

Dimensions
Dimensions

500 TON

Abmessungen
Afmetingen

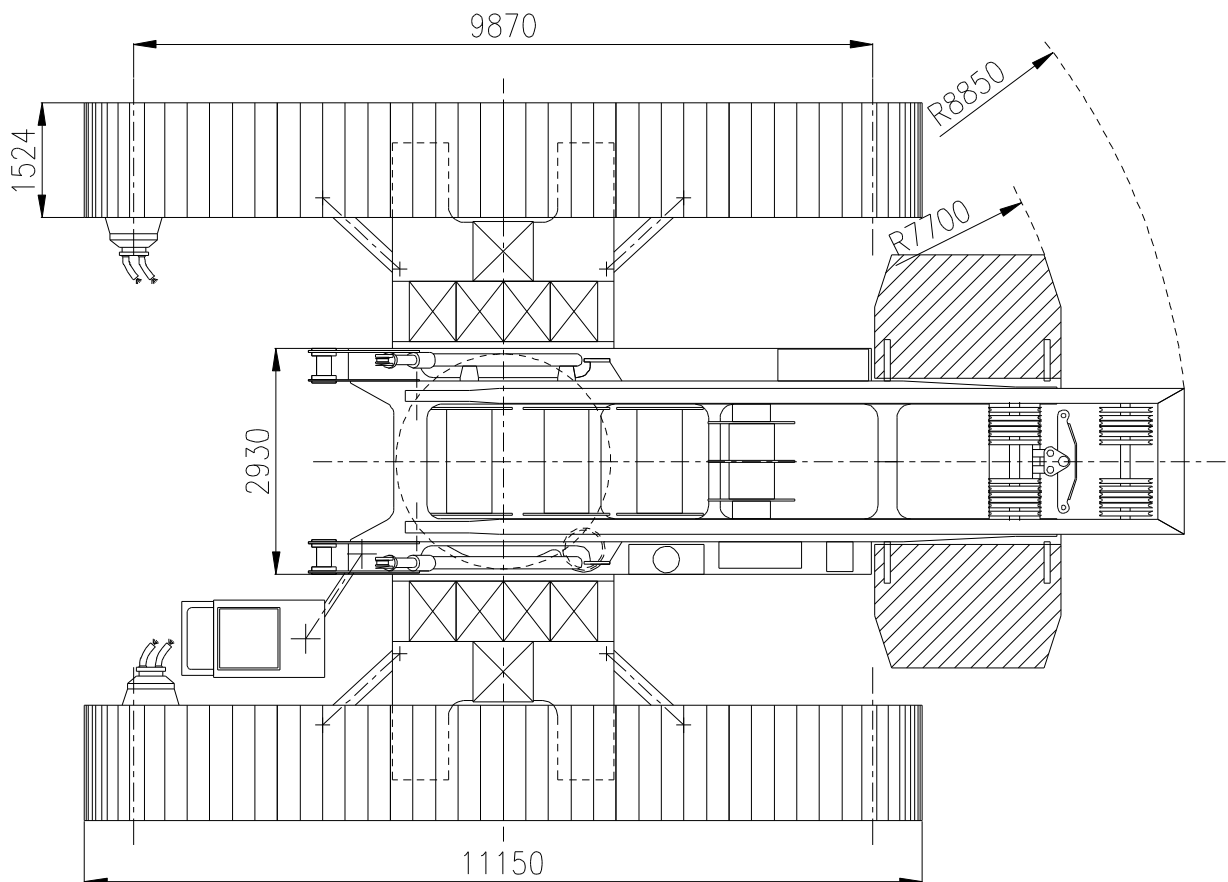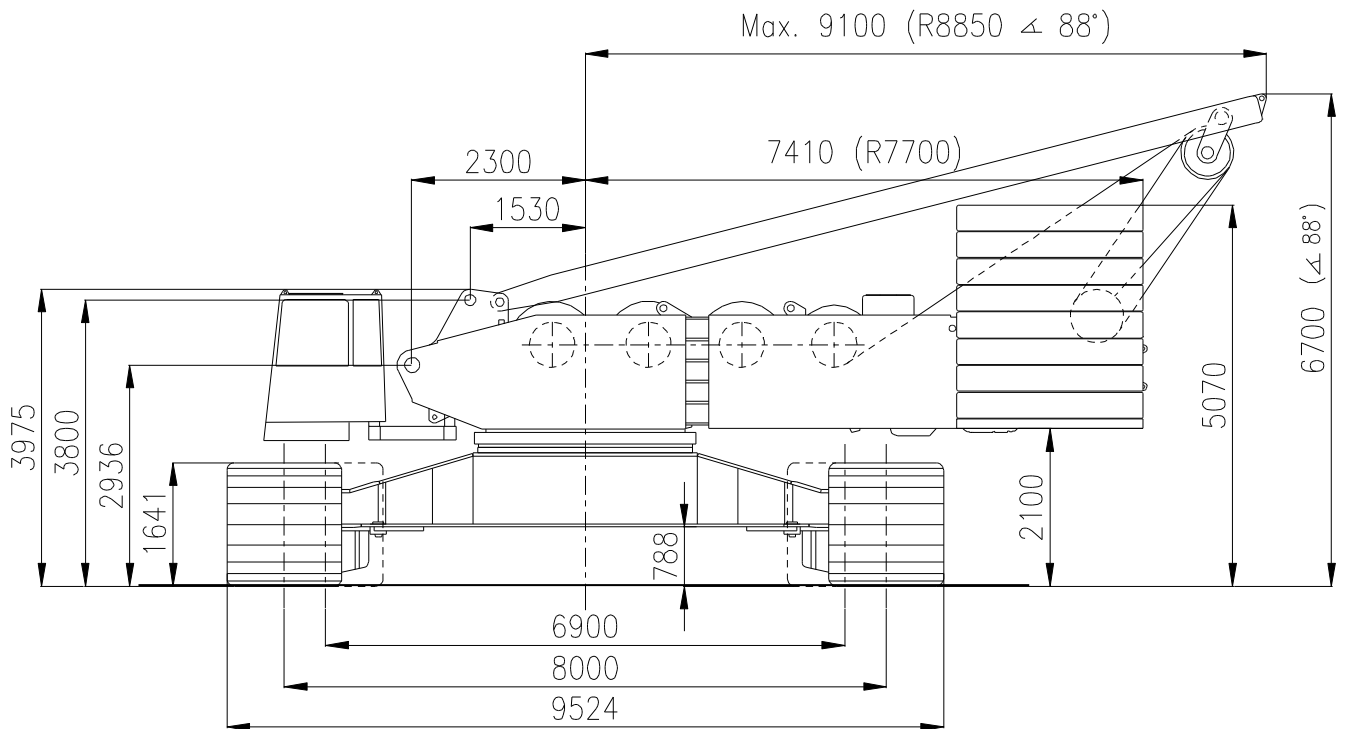



TEREX CC 2600 H


500 TON

**Weight
Poids**



**Gewicht
Gewicht**

Superstructure with carbody + winch I, II, IV Partie supérieure avec carter central + treuil I, II, IV Oberwagen mit Mittelstück + Winde I, II, IV Bovenwagen met centraal onderstelgedeelte + lier I, II, IV	86.8 t
Crawler unit Bâti de chenille Raupe Rups	2 x 41 t
Counterweight + cranebody counterweight Contrepoids + lest central Gegengewicht + Zentralballast Tegengewicht + centraalballast	149 t


Carbody 86.8 t
15355 x 3000 x 3230 mm

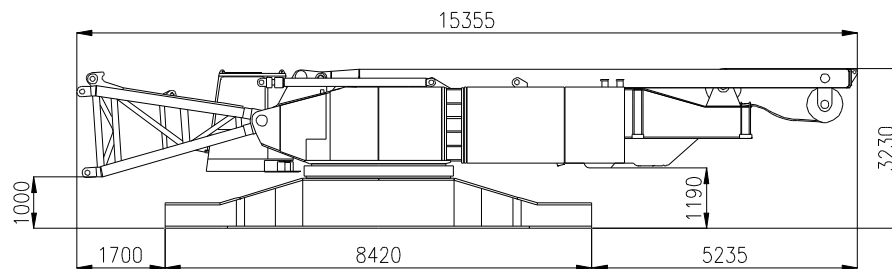


2 x 41 t
11180 x 2355 x 1650 mm

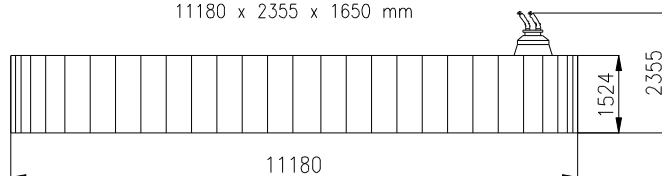


8 x 8,75 t
1640x2470x385 mm







1 x 4,30 t
1840x2470x680 mm



1 x 4,30 t
1840x2470x680 mm



8 x 8,75 t
1640x2470x385 mm






TEREX CC 2600 H

Configurations
Configurations

500 TON

Konfigurationen
Configuraties

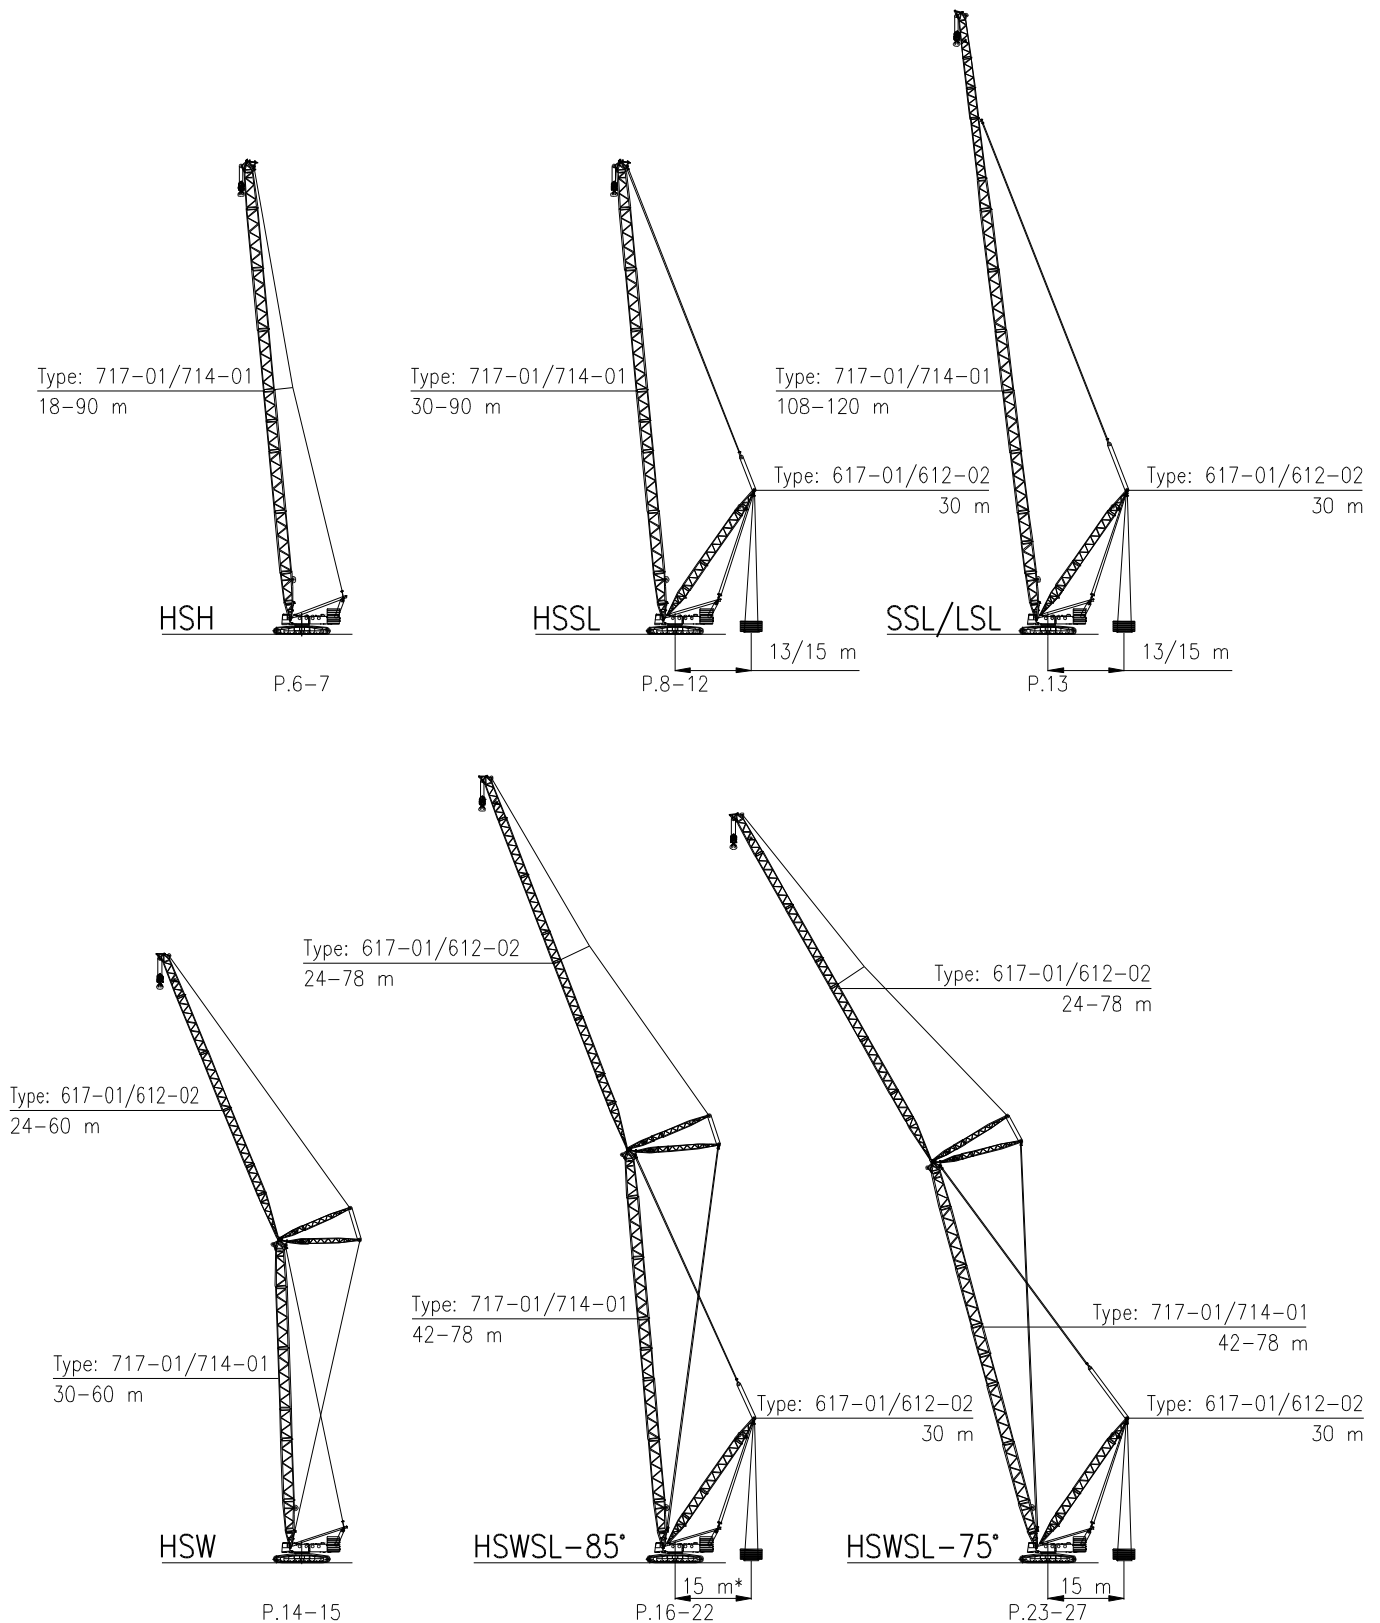

* : Duty charts 13m on request / Charges pour 13m sur demande / Tragfähigkeiten für 13m auf Anfrage / Lasttabellen voor 13m op aanvraag




TEREX CC 2600 H

Configurations
Configurations

500 TON

Konfigurationen
Configuraties

Runner 2m SWL 25t	Runner 6m SWL 25t	
Main boom	Luffer	

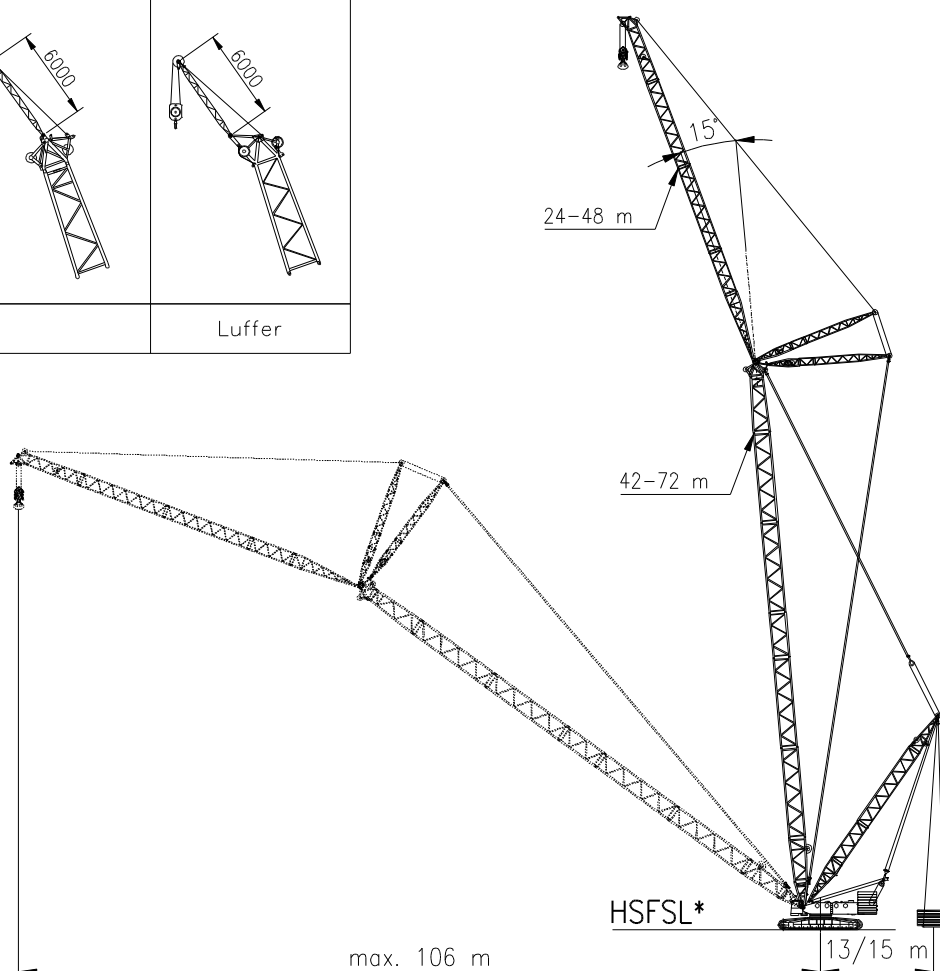

Remark :
Remarque :

Bemerkung :
Opmerking :



Superlift also available with counterweight-carrier
Contrepoids de superlift aussi disponible sur chariot de contrepoids
Superlift auch mit Gegengewichtswagen verfügbar
Superlift ook uitvoerbaar met superliftwagen

* : Duty charts on request / Charges sur demande / Tragfähigkeiten auf Anfrage / Lasttabellen op aanvraag




TEREX CC 2600 H

Working ranges
Portées

500 TON

Arbeitsbereiche
Werkbereich

SH

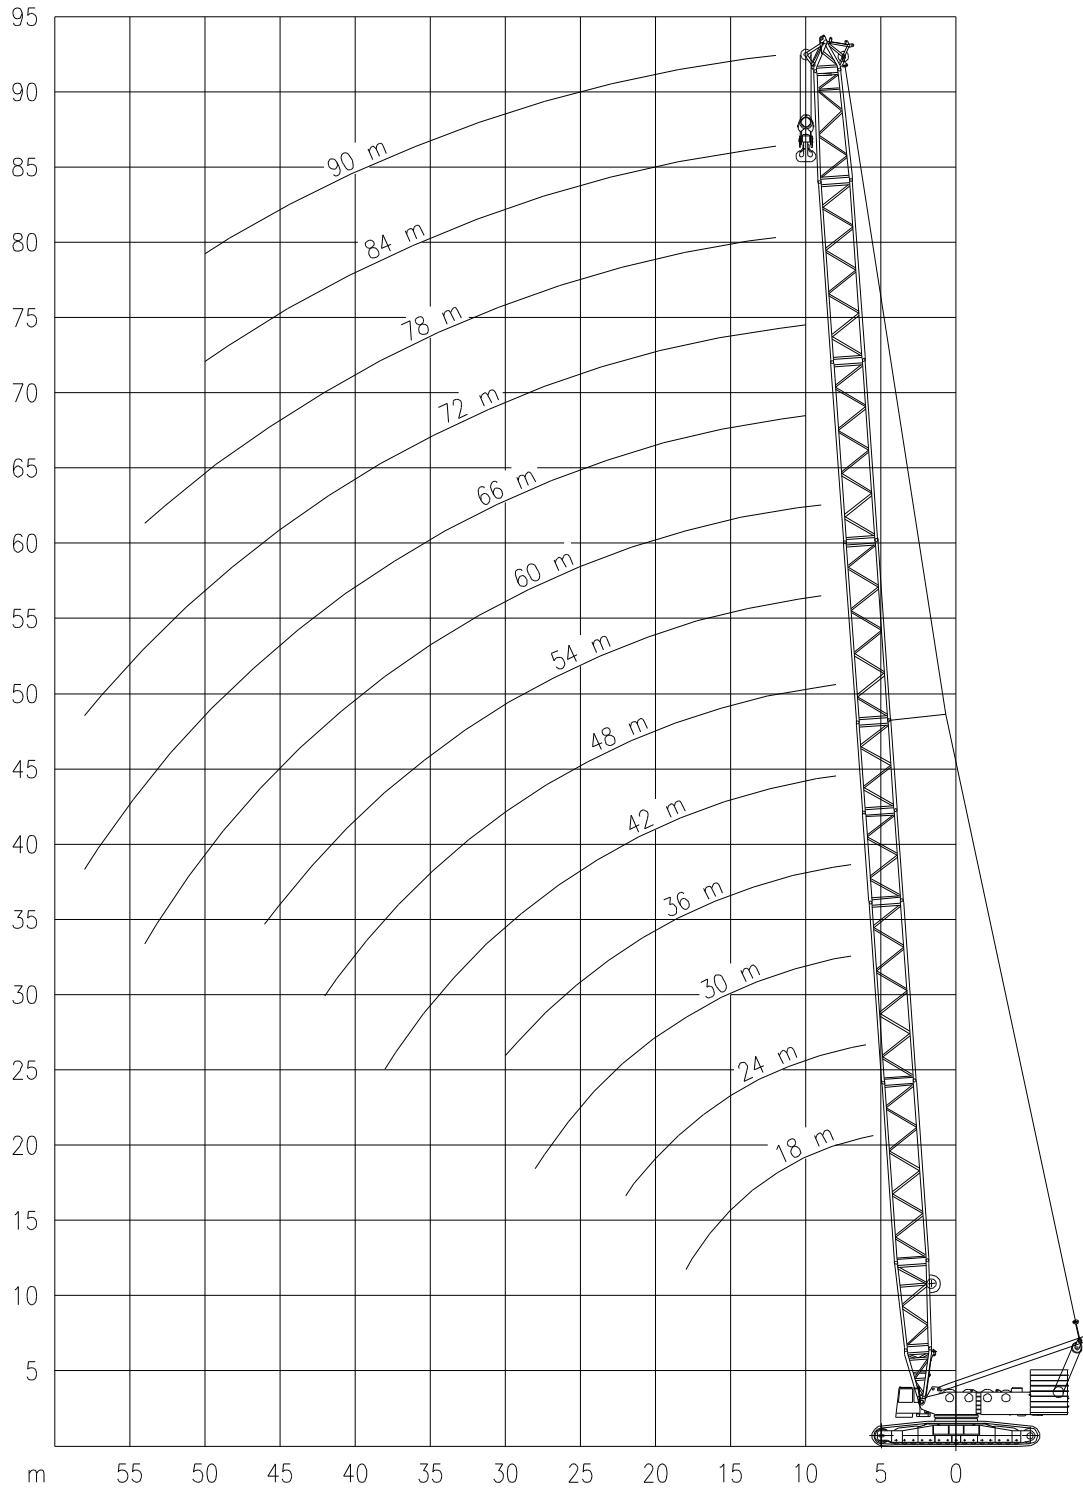




TEREX CC 2600 H



Lifting capacities
Capacités

500 TON

Tragfähigkeiten
Capacités



HSB



	18m	24m	30m	36m	42m	48m	54m	60m	66m	72m	78m	84m	90m
t	t	t	t	t	t	t	t	t	t	t	t	t	t
5.5	450.0*	-	-	-	-	-	-	-	-	-	-	-	-
6.0	382.0*	400.0*	-	-	-	-	-	-	-	-	-	-	-
7.0	359.0*	373.0*	370.0*	369.0*	-	-	-	-	-	-	-	-	-
8.0	331.0*	329.0*	327.0*	325.0*	323.0*	309.0*	-	-	-	-	-	-	-
9.0	272.0*	271.0*	270.0*	290.0*	288.0*	286.0*	281.0*	275.0*	-	-	-	-	-
10.0	225.0*	224.0*	223.0*	242.0*	241.0*	240.0*	239.0*	238.0*	238.0*	225.0*	-	-	-
12.0	166.0*	165.0*	164.0*	178.0*	177.0*	176.0*	175.0*	174.0*	173.0*	172.0*	172.0*	168.0*	141.0*
14.0	131.0	130.0	129.0	139.0	138.0	137.0	136.0	135.0	134.0	134.0	135.0*	132.0*	130.0*
16.0	108.0	106.0	105.0	114.0	112.0	111.0	110.0	109.0	108.0	108.0	107.0	106.0	105.0*
18.0	91.0	89.0	88.0	95.0	94.0	93.0	92.0	91.0	90.0	89.0	88.0	87.0	86.0
20.0	-	77.0	76.0	82.0	80.0	79.0	78.0	77.0	76.0	75.0	74.0	73.0	72.0
22.0	-	67.0	66.0	71.0	70.0	68.0	68.0	66.0	65.0	64.0	63.0	62.0	61.0
24.0	-	-	58.0	63.0	61.0	60.0	59.0	58.0	57.0	56.0	55.0	54.0	53.0
26.0	-	-	52.0	56.0	54.0	53.0	52.0	51.0	50.0	49.0	48.0	47.0	46.0
28.0	-	-	47.0	50.0	49.0	47.0	46.0	45.0	44.0	43.0	42.0	41.0	40.0
30.0	-	-	-	45.0	44.0	42.0	41.0	40.0	39.0	38.0	37.0	35.0	34.0
34.0	-	-	-	-	36.0	35.0	34.0	32.0	31.0	30.0	28.0	27.0	26.0
38.0	-	-	-	-	30.0	29.0	28.0	26.0	25.0	23.0	22.0	21.0	19.0
42.0	-	-	-	-	-	24.0	23.0	21.0	20.0	18.0	17.0	15.0	14.0
46.0	-	-	-	-	-	-	19.0	17.0	16.0	14.0	13.0	11.0	10.0
50.0	-	-	-	-	-	-	-	14.0	12.0	11.0	9.0	8.0	7.0
54.0	-	-	-	-	-	-	-	10.0	9.0	8.0	6.0	-	-
58.0	-	-	-	-	-	-	-	-	7.0	5.0	-	-	-

* Double hook block required




TEREX CC 2600 H

Working ranges
Portées

500 TON

Arbeitsbereiche
Werkbereich

HSSL + HSSL / LSL

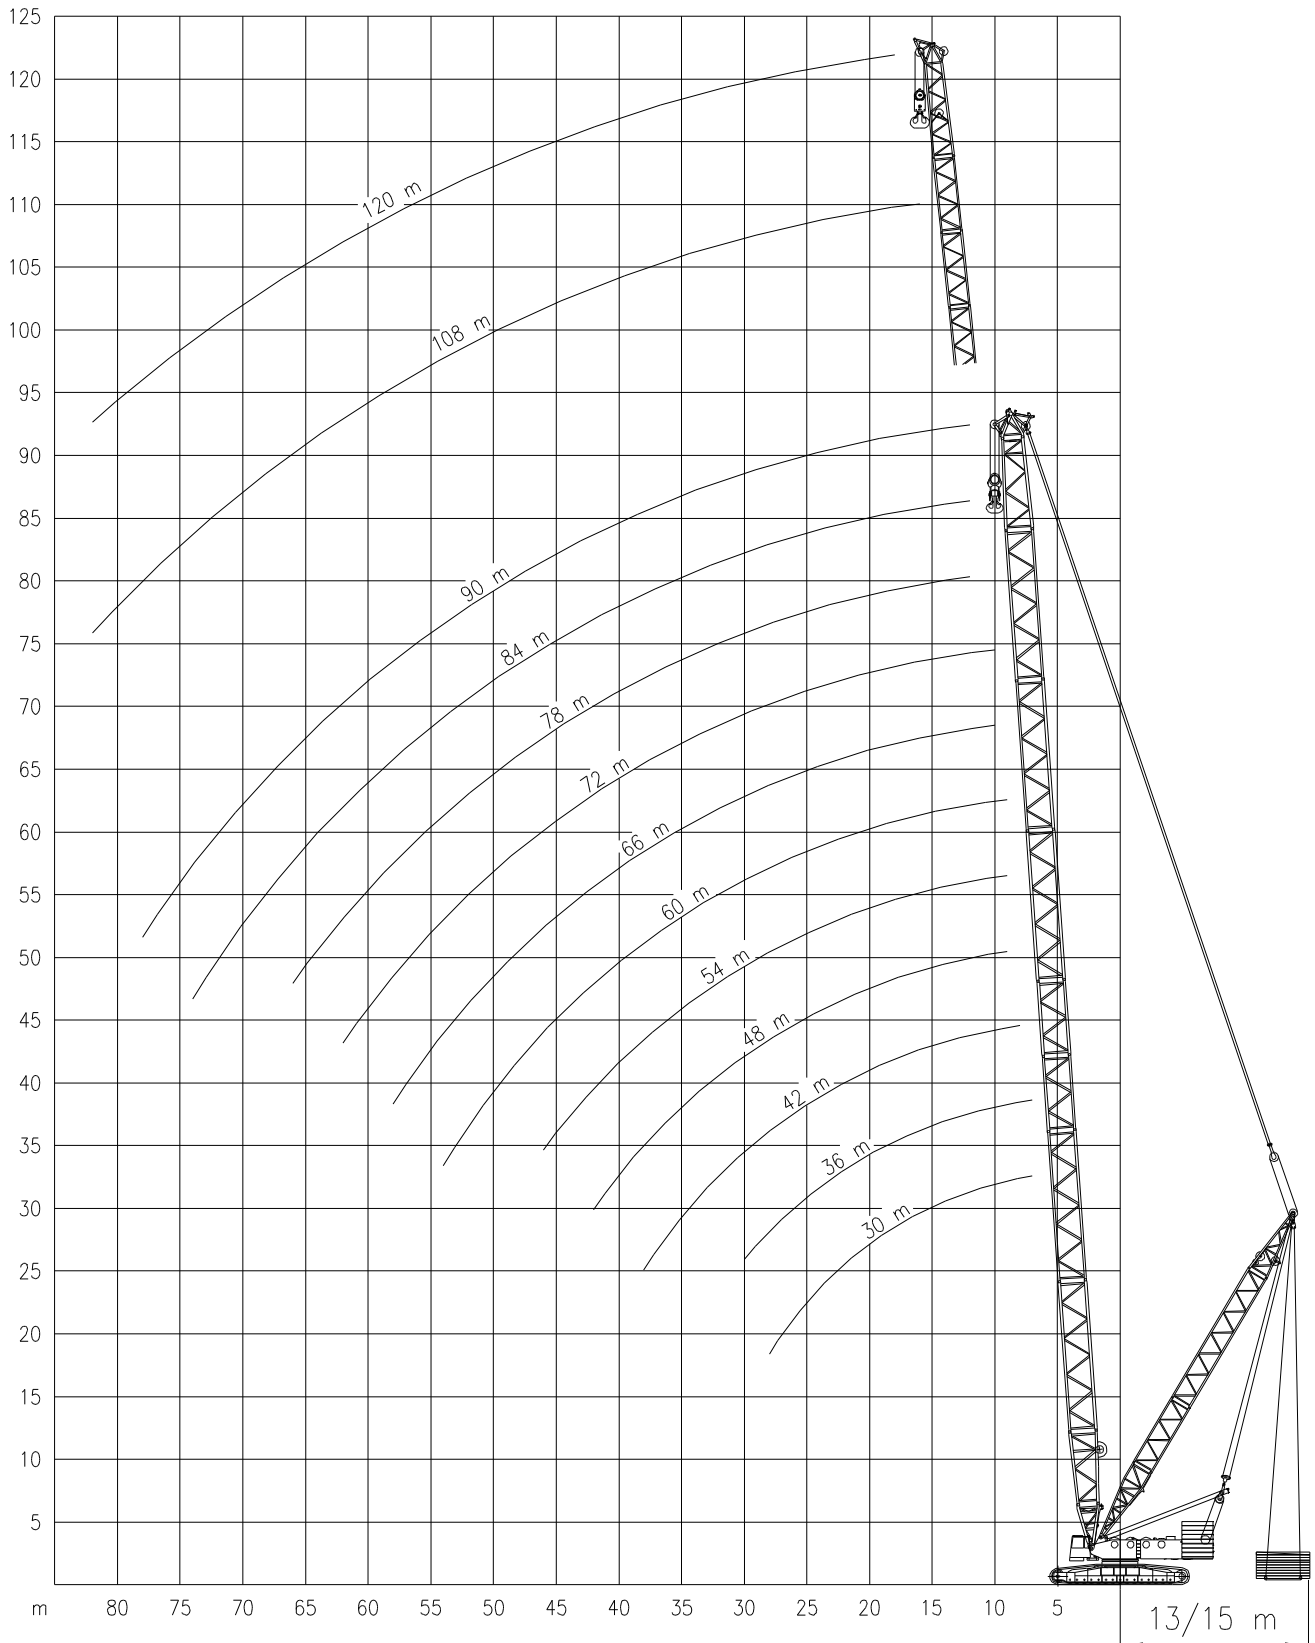


TEREX CC 2600 H


Lifting capacities Capacités

500 TON

Tragfähigkeiten Capaciteiten



HSSL



	30 m							36 m						
	0 t	50 t	100 t	150 t	200 t	250 t	250 t carrier	0 t	50 t	100 t	150 t	200 t	250 t	250 t carrier
	t	t	t	t	t	t	t	t	t	t	t	t	t	t
m	t	t	t	t	t	t	t	t	t	t	t	t	t	t
7.0	470.0**	500.0*	-	-	-	-	500.0*	470.0**	475.0*	-	-	-	-	497.0*
8.0	355.0*	465.0*	500.0*	-	-	-	500.0*	355.0*	455.0*	497.0*	-	-	-	497.0*
9.0	282.0*	405.0*	470.0*	500.0*	-	-	500.0*	281.0*	405.0*	468.0*	-	-	-	475.0*
10.0	233.0*	348.0*	427.0*	475.0*	-	-	475.0*	232.0*	347.0*	425.0*	472.0*	-	-	472.0*
12.0	171.0*	258.0*	344.0*	409.0*	445.0*	-	445.0*	170.0*	257.0*	343.0*	407.0*	443.0*	-	443.0*
14.0	134.0	204.0*	273.0*	342.0*	389.0*	-	420.0*	133.0	202.0*	272.0*	341.0*	387.0*	-	410.0*
16.0	110.0	168.0*	225.0*	283.0*	339.0*	-	354.0*	108.0	166.0*	224.0*	282.0*	337.0*	-	353.0*
18.0	92.0	142.0	191.0*	241.0*	290.0*	331.0*	331.0*	91.0	140.0	190.0*	239.0*	289.0*	329.0*	329.0*
20.0	79.0	123.0	166.0*	209.0*	252.0*	296.0*	296.0*	78.0	121.0	164.0*	208.0*	251.0*	294.0*	294.0*
22.0	69.0	108.0	146.0*	185.0*	223.0*	262.0*	262.0*	68.0	106.0	145.0*	183.0*	222.0*	260.0*	260.0*
24.0	61.0	96.0	130.0	165.0*	200.0*	-	200.0*	59.0	94.0	129.0	163.0*	198.0*	233.0*	233.0*
26.0	55.0	86.0	118.0	149.0*	181.0*	-	181.0*	53.0	84.0	116.0	147.0*	179.0*	210.0*	210.0*
28.0	49.0	78.0	107.0	136.0	165.0*	-	165.0*	47.0	76.0	105.0	134.0	163.0*	192.0*	192.0*
30.0	-	-	-	-	-	-	-	43.0	69.0	96.0	123.0	149.0*	-	156.0*
	42 m							48 m						
8.0	354.0*	435.0*	-	-	-	-	435.0*	-	-	-	-	-	-	-
9.0	280.0*	398.0*	435.0*	-	-	-	435.0*	279.0*	395.0*	-	-	-	-	395.0*
10.0	230.0*	346.0*	423.0*	435.0*	-	-	435.0*	229.0*	345.0*	395.0*	-	-	-	395.0*
12.0	169.0*	255.0*	342.0*	405.0*	435.0*	-	435.0*	168.0*	254.0*	341.0*	395.0*	-	-	395.0*
14.0	132.0	201.0*	270.0*	340.0*	385.0*	-	405.0*	131.0	200.0*	269.0*	338.0*	383.0*	-	395.0*
16.0	107.0	165.0*	223.0*	280.0*	336.0*	-	351.0*	106.0	164.0*	221.0*	279.0*	334.0*	-	350.0*
18.0	90.0	139.0	189.0*	238.0*	288.0*	327.0*	327.0*	88.0	138.0	187.0*	237.0*	286.0*	326.0*	326.0*
20.0	76.0	120.0	163.0*	206.0*	250.0*	292.0*	292.0*	75.0	118.0	162.0*	205.0*	248.0*	291.0*	291.0*
22.0	66.0	105.0	143.0*	182.0*	220.0*	259.0*	259.0*	65.0	103.0	142.0	180.0*	219.0*	257.0*	257.0*
24.0	58.0	93.0	127.0	162.0*	197.0*	231.0*	231.0*	57.0	91.0	126.0	161.0*	195.0*	230.0*	230.0*
26.0	51.0	83.0	114.0	146.0*	177.0*	209.0*	209.0*	50.0	81.0	113.0	144.0*	176.0*	207.0*	207.0*
28.0	46.0	75.0	104.0	133.0	161.0*	190.0*	190.0*	44.0	73.0	102.0	131.0	160.0*	189.0*	189.0*
30.0	41.0	68.0	95.0	121.0	148.0*	175.0*	175.0*	40.0	66.0	93.0	120.0	146.0*	173.0*	173.0*
34.0	34.0	57.0	80.0	103.0	126.0	-	133.0	32.0	56.0	79.0	102.0	125.0	-	131.0
38.0	29.0	49.0	69.0	90.0	110.0	-	115.0	27.0	47.0	68.0	88.0	108.0	-	114.0
42.0	-	-	-	-	-	-	-	22.0	41.0	59.0	77.0	96.0	-	101.0
	54 m							60 m						
9.0	305.0*	-	-	-	-	-	350.0*	304.0*	-	-	-	-	-	310.0*
10.0	251.0*	350.0*	-	-	-	-	350.0*	250.0*	310.0*	-	-	-	-	310.0*
12.0	184.0*	270.0*	350.0*	-	-	-	350.0*	183.0*	269.0*	310.0*	-	-	-	310.0*
14.0	143.0*	213.0*	282.0*	349.0*	-	-	350.0*	142.0	211.0*	281.0*	310.0*	-	-	310.0*
16.0	116.0	174.0*	232.0*	290.0*	339.0*	-	339.0*	115.0	173.0*	231.0*	288.0*	310.0*	-	310.0*
18.0	97.0	147.0*	196.0*	246.0*	295.0*	328.0*	328.0*	96.0	145.0*	195.0*	244.0*	294.0*	310.0*	310.0*
20.0	83.0	126.0	169.0*	213.0*	256.0*	295.0*	295.0*	81.0	125.0	168.0*	211.0*	255.0*	293.0*	293.0*
22.0	71.0	110.0	148.0*	187.0*	225.0*	264.0*	264.0*	70.0	109.0	147.0*	186.0*	224.0*	263.0*	263.0*
24.0	62.0	97.0	132.0	166.0*	201.0*	236.0*	236.0*	61.0	96.0	130.0	165.0*	200.0*	234.0*	234.0*
26.0	55.0	87.0	118.0	150.0*	181.0*	213.0*	213.0*	54.0	85.0	117.0	148.0*	180.0*	211.0*	211.0*
28.0	49.0	78.0	107.0	136.0	165.0*	193.0*	193.0*	48.0	77.0	106.0	134.0	163.0*	192.0*	192.0*
30.0	44.0	71.0	97.0	124.0	151.0*	177.0*	177.0*	43.0	69.0	96.0	123.0	149.0*	176.0*	176.0*
34.0	36.0	59.0	82.0	105.0	128.0	151.0*	151.0*	34.0	58.0	81.0	104.0	127.0	150.0*	150.0*
38.0	30.0	50.0	70.0	91.0	111.0	132.0	132.0	28.0	49.0	69.0	89.0	110.0	130.0	130.0
42.0	25.0	43.0	61.0	80.0	98.0	116.0	116.0	23.0	42.0	60.0	78.0	96.0	115.0	115.0
46.0	21.0	38.0	54.0	71.0	87.0	104.0	104.0	19.0	36.0	53.0	69.0	86.0	102.0	102.0
50.0	-	-	-	-	-	-	-	16.0	32.0	47.0	62.0	77.0	92.0	92.0
54.0	-	-	-	-	-	-	-	13.0	28.0	42.0	56.0	69.0	83.0	83.0
	66 m													
10.0	250.0*	285.0*	-	-	-	-	285.0*							
12.0	182.0*	269.0*	285.0*	-	-	-	285.0*							
14.0	141.0	211.0*	280.0*	-	-	-	285.0*							
16.0	114.0	172.0*	230.0*	285.0*	-	-	285.0*							
18.0	95.0	145.0*	194.0*	243.0*	285.0*	-	285.0*							
20.0	81.0	124.0	167.0*	210.0*	254.0*	285.0*	285.0*							
22.0	69.0	108.0	146.0*	185.0*	223.0*	262.0*	262.0*							
24.0	60.0	95.0	130.0	164.0*	199.0*	234.0*	234.0*							
26.0	53.0	84.0	116.0	147.0*	179.0*	210.0*	210.0*							
28.0	47.0	76.0	105.0	133.0	162.0*	191.0*	191.0*							
30.0	42.0	68.0	95.0	122.0	148.0*	175.0*	175.0*							
34.0	33.0	57.0	80.0	103.0	126.0	149.0*	149.0*							
38.0	27.0	48.0	68.0	88.0	109.0	129.0	129.0							
42.0	22.0	41.0	59.0	77.0	95.0	113.0	113.0							
46.0	17.0	35.0	51.0	68.0	84.0	101.0	101.0							
50.0	14.0	30.0	45.0	60.0	75.0	90.0	90.0							
54.0	11.0	26.0	40.0	54.0	68.0	82.0	82.0							
58.0	-	23.0	36.0	49.0	62.0	75.0	75.0							

* Double hook block required

**** Over front and rear / Double hook block required**




TEREX CC 2600 H


Lifting capacities
Capacités

500 TON

Tragfähigkeiten
Capacités



HSSL



DIN
ISO

75%

m	72 m							78 m						
	0 t	50 t	100 t	150 t	200 t	250 t	250 t carrier	0 t	50 t	100 t	150 t	200 t	250 t	250 t carrier
10.0	249.0*	-	-	-	-	-	263.0*	-	-	-	-	-	-	-
12.0	181.0*	263.0*	-	-	-	-	263.0*	180.0*	230.0*	-	-	-	-	230.0*
14.0	141.0	210.0*	263.0*	-	-	-	263.0*	140.0*	209.0*	230.0*	-	-	-	230.0*
16.0	113.0	171.0*	229.0*	263.0*	-	-	263.0*	112.0	170.0*	228.0*	-	-	-	230.0*
18.0	94.0	144.0*	193.0*	243.0*	263.0*	-	263.0*	93.0	143.0*	192.0*	230.0*	-	-	230.0*
20.0	80.0	123.0	166.0*	210.0*	253.0*	-	263.0*	79.0	122.0	165.0*	208.0*	230.0*	-	230.0*
22.0	68.0	107.0	145.0*	184.0*	222.0*	261.0*	261.0*	67.0	106.0	144.0*	183.0*	221.0*	-	230.0*
24.0	59.0	94.0	129.0	163.0*	198.0*	233.0*	233.0*	58.0	93.0	128.0	162.0*	197.0*	230.0*	230.0*
26.0	52.0	83.0	115.0	146.0*	178.0*	209.0*	209.0*	51.0	82.0	114.0	145.0*	177.0*	208.0*	208.0*
28.0	46.0	75.0	104.0	132.0	161.0*	190.0*	190.0*	45.0	74.0	102.0	131.0*	160.0*	189.0*	189.0*
30.0	41.0	67.0	94.0	121.0	147.0*	174.0*	174.0*	40.0	66.0	93.0	119.0	146.0*	173.0*	173.0*
34.0	32.0	55.0	79.0	102.0	125.0	148.0*	148.0*	31.0	54.0	77.0	100.0	124.0	147.0*	147.0*
38.0	26.0	46.0	67.0	87.0	108.0	128.0	128.0	24.0	45.0	66.0	86.0	106.0	127.0	127.0
42.0	20.0	39.0	58.0	76.0	94.0	112.0	112.0	19.0	38.0	56.0	75.0	93.0	111.0	111.0
46.0	16.0	34.0	50.0	67.0	83.0	100.0	100.0	15.0	32.0	49.0	65.0	82.0	98.0	98.0
50.0	13.0	29.0	44.0	59.0	74.0	89.0	89.0	11.0	27.0	43.0	58.0	73.0	88.0	88.0
54.0	10.0	25.0	39.0	53.0	67.0	81.0	81.0	-	23.0	38.0	51.0	65.0	79.0	79.0
58.0	-	21.0	35.0	48.0	60.0	73.0	73.0	-	19.0	33.0	46.0	59.0	72.0	72.0
62.0	-	18.0	31.0	43.0	55.0	67.0	67.0	-	16.0	29.0	42.0	53.0	65.0	65.0
66.0	-	-	-	-	-	-	-	-	14.0	26.0	38.0	49.0	60.0	60.0
m	84 m							90 m						
	0 t	50 t	100 t	150 t	200 t	250 t	250 t carrier	0 t	50 t	100 t	150 t	200 t	250 t	250 t carrier
12.0	179.0*	-	-	-	-	-	203.0*	179.0*	-	-	-	-	-	180.0*
14.0	139.0*	203.0*	-	-	-	-	203.0*	138.0*	180.0*	-	-	-	-	180.0*
16.0	111.0*	169.0*	203.0*	-	-	-	203.0*	111.0*	168.0*	-	-	-	-	180.0*
18.0	92.0	142.0*	191.0*	-	-	-	203.0*	91.0	141.0*	180.0*	-	-	-	180.0*
20.0	77.0	121.0*	164.0*	203.0*	-	-	203.0*	77.0	120.0*	163.0*	-	-	-	180.0*
22.0	66.0	105.0	143.0*	182.0*	203.0*	-	203.0*	65.0	104.0	142.0*	180.0*	-	-	180.0*
24.0	57.0	92.0	126.0*	161.0*	196.0*	-	203.0*	56.0	91.0	125.0*	160.0*	180.0*	-	180.0*
26.0	50.0	81.0	113.0*	144.0*	176.0*	203.0*	203.0*	49.0	80.0	112.0*	143.0*	175.0*	-	180.0*
28.0	44.0	72.0	101.0	130.0*	159.0*	188.0*	188.0*	43.0	71.0	100.0	129.0*	158.0*	-	180.0*
30.0	38.0	65.0	92.0	118.0*	145.0*	172.0*	172.0*	37.0	64.0	91.0	117.0*	144.0*	171.0*	171.0*
34.0	30.0	53.0	76.0	99.0	122.0*	146.0*	146.0*	28.0	52.0	75.0	98.0	121.0*	145.0*	145.0*
38.0	23.0	44.0	64.0	85.0	105.0	126.0*	126.0*	22.0	43.0	63.0	84.0	104.0	125.0*	125.0*
42.0	17.0	37.0	55.0	73.0	92.0	110.0	110.0	16.0	36.0	54.0	72.0	91.0	109.0*	109.0*
46.0	13.0	31.0	48.0	64.0	81.0	97.0	97.0	12.0	29.0	47.0	63.0	80.0	96.0	96.0
50.0	10.0	26.0	42.0	57.0	72.0	87.0	87.0	-	24.0	40.0	56.0	71.0	86.0	86.0
54.0	-	22.0	36.0	50.0	64.0	78.0	78.0	-	20.0	35.0	49.0	63.0	77.0	77.0
58.0	-	18.0	32.0	45.0	58.0	71.0	71.0	-	17.0	30.0	44.0	57.0	69.0	69.0
62.0	-	15.0	28.0	40.0	52.0	64.0	64.0	-	14.0	26.0	39.0	51.0	63.0	63.0
66.0	-	12.0	24.0	36.0	47.0	59.0	59.0	-	11.0	23.0	35.0	46.0	57.0	57.0
70.0	-	10.0	21.0	33.0	43.0	54.0	54.0	-	-	20.0	31.0	42.0	53.0	53.0
74.0	-	-	19.0	29.0	40.0	50.0	50.0	-	-	17.0	28.0	38.0	48.0	48.0
78.0	-	-	-	-	-	-	-	-	-	15.0	25.0	35.0	45.0	45.0

* Double hook block required

** Over front and rear / Double hook block required




TEREX CC 2600 H


500 TON

Lifting capacities
Capacités

Tragfähigkeiten
Capaciteiten



HSSL



DIN
ISO

75%

	30 m						36 m					
	0 t	50 t	100 t	150 t	200 t	250 t	0 t	50 t	100 t	150 t	200 t	250 t
	m	t	t	t	t	t	t	t	t	t	t	t
7.0	469.0**	500.0*	500.0*	-	-	-	468.0*	475.0*	-	-	-	-
8.0	355.0*	465.0*	497.0*	-	-	-	355.0*	455.0*	455.0*	-	-	-
9.0	281.0*	405.0*	461.0*	492.0*	-	-	280.0*	404.0*	435.0*	-	-	-
10.0	231.0*	334.0*	417.0*	458.0*	-	-	230.0*	334.0*	416.0*	431.0*	-	-
12.0	169.0*	246.0*	324.0*	384.0*	419.0*	-	168.0*	246.0*	323.0*	383.0*	403.0*	-
14.0	132.0	194.0*	256.0*	318.0*	360.0*	390.0*	131.0	193.0*	255.0*	317.0*	359.0*	-
16.0	107.0	159.0*	210.0*	262.0*	314.0*	342.0*	106.0	158.0*	210.0*	261.0*	313.0*	341.0*
18.0	89.0	134.0	178.0*	222.0*	267.0*	303.0*	89.0	133.0	177.0*	222.0*	266.0*	302.0*
20.0	76.0	115.0	154.0*	193.0*	231.0*	270.0*	76.0	114.0	153.0*	192.0*	231.0*	269.0*
22.0	66.0	101.0	135.0	170.0*	204.0*	238.0*	65.0	100.0	134.0	169.0*	203.0*	238.0*
24.0	58.0	89.0	120.0	151.0*	182.0*	213.0*	57.0	88.0	119.0	150.0*	181.0*	212.0*
26.0	52.0	80.0	108.0	136.0	164.0*	193.0*	51.0	79.0	107.0	135.0	163.0*	192.0*
28.0	46.0	72.0	98.0	124.0	150.0*	175.0*	45.0	71.0	97.0	123.0	149.0*	174.0*
30.0	-	-	-	-	-	-	41.0	64.0	88.0	112.0	136.0	160.0*
34.0	-	-	-	-	-	-	34.0	54.0	75.0	96.0	116.0	137.0
	42 m						48 m					
8.0	353.0*	426.0*	426.0*	-	-	-	-	-	-	-	-	-
9.0	279.0*	403.0*	426.0*	-	-	-	278.0*	395.0*	-	-	-	-
10.0	229.0*	332.0*	413.0*	418.0*	-	-	228.0*	331.0*	395.0*	395.0*	-	-
12.0	167.0*	244.0*	322.0*	381.0*	400.0*	-	166.0*	243.0*	321.0*	379.0*	391.0*	-
14.0	129.0	191.0*	253.0*	315.0*	357.0*	-	128.0	190.0*	252.0*	314.0*	355.0*	-
16.0	105.0	156.0*	208.0*	260.0*	311.0*	339.0*	103.0	155.0*	207.0*	258.0*	310.0*	337.0*
18.0	87.0	131.0	176.0*	220.0*	264.0*	300.0*	86.0	130.0	174.0*	219.0*	263.0*	299.0*
20.0	74.0	112.0	151.0*	190.0*	229.0*	267.0*	72.0	111.0	150.0*	189.0*	227.0*	266.0*
22.0	63.0	98.0	132.0	167.0*	201.0*	236.0*	62.0	97.0	131.0	166.0*	200.0*	234.0*
24.0	55.0	86.0	117.0	148.0*	179.0*	210.0*	54.0	85.0	116.0	147.0*	178.0*	209.0*
26.0	49.0	77.0	105.0	133.0	161.0*	190.0*	47.0	75.0	104.0	132.0	160.0*	188.0*
28.0	43.0	69.0	95.0	121.0	146.0*	172.0*	42.0	68.0	93.0	119.0	145.0*	171.0*
30.0	39.0	62.0	86.0	110.0	134.0	158.0*	37.0	61.0	85.0	109.0	132.0	156.0*
34.0	31.0	52.0	73.0	93.0	114.0	135.0	30.0	50.0	71.0	92.0	112.0	133.0
38.0	26.0	44.0	62.0	81.0	99.0	117.0	24.0	42.0	61.0	79.0	97.0	115.0
42.0	-	-	-	-	-	-	19.0	36.0	53.0	69.0	85.0	102.0
	54 m						60 m					
9.0	304.0*	-	-	-	-	-	303.0*	-	-	-	-	-
10.0	249.0*	350.0*	350.0*	-	-	-	249.0*	310.0*	-	-	-	-
12.0	181.0*	259.0*	336.0*	350.0*	-	-	181.0*	258.0*	310.0*	-	-	-
14.0	141.0	203.0*	265.0*	327.0*	350.0*	-	140.0	202.0*	264.0*	310.0*	-	-
16.0	113.0	165.0*	217.0*	268.0*	313.0*	340.0*	113.0	164.0*	216.0*	268.0*	310.0*	310.0*
18.0	94.0	138.0	183.0*	227.0*	217.0*	301.0*	93.0	138.0	182.0*	226.0*	270.0*	300.0*
20.0	80.0	118.0	157.0*	196.0*	235.0*	270.0*	79.0	118.0	156.0*	195.0*	234.0*	269.0*
22.0	68.0	103.0	137.0	172.0*	206.0*	240.0*	68.0	102.0	136.0	171.0*	205.0*	240.0*
24.0	59.0	90.0	121.0	152.0*	183.0*	214.0*	58.0	89.0	120.0	151.0*	182.0*	213.0*
26.0	52.0	80.0	108.0	136.0	165.0*	193.0*	51.0	79.0	107.0	136.0	164.0*	192.0*
28.0	46.0	72.0	98.0	123.0	149.0*	175.0*	45.0	71.0	97.0	122.0	148.0*	174.0*
30.0	41.0	65.0	88.0	112.0	136.0	160.0*	40.0	64.0	88.0	111.0	135.0	159.0*
34.0	32.0	53.0	74.0	95.0	115.0	136.0	31.0	52.0	73.0	94.0	114.0	135.0
38.0	26.0	45.0	63.0	81.0	99.0	118.0	25.0	44.0	62.0	80.0	98.0	117.0
42.0	21.0	38.0	54.0	71.0	87.0	103.0	20.0	37.0	53.0	70.0	86.0	102.0
46.0	17.0	33.0	48.0	62.0	77.0	92.0	16.0	31.0	46.0	61.0	76.0	91.0
50.0	-	-	-	-	-	-	12.0	27.0	41.0	54.0	68.0	81.0
54.0	-	-	-	-	-	-	10.0	23.0	36.0	49.0	61.0	73.0
	66 m											
10.0	248.0*	285.0*	-	-	-	-						
12.0	179.0*	257.0*	285.0*	-	-	-						
14.0	139.0	201.0*	263.0*	285.0*	-	-						
16.0	111.0	163.0*	215.0*	266.0*	285.0*	-						
18.0	92.0	136.0	180.0*	225.0*	269.0*	285.0*						
20.0	77.0	116.0	155.0*	194.0*	232.0*	267.0*						
22.0	66.0	100.0	135.0	169.0*	204.0*	238.0*						
24.0	57.0	88.0	119.0	150.0*	181.0*	212.0*						
26.0	50.0	78.0	106.0	134.0	162.0*	190.0*						
28.0	43.0	69.0	95.0	121.0	147.0*	173.0*						
30.0	38.0	62.0	86.0	110.0	134.0	157.0*						
34.0	29.0	51.0	71.0	92.0	113.0	133.0						
38.0	23.0	42.0	60.0	78.0	97.0	115.0						
42.0	18.0	35.0	51.0	68.0	84.0	100.0						
46.0	13.0	29.0	44.0	59.0	74.0	89.0						
50.0	10.0	24.0	39.0	52.0	66.0	79.0						
54.0	-	21.0	34.0	46.0	59.0	71.0						
58.0	-	18.0	30.0	42.0	53.0	65.0						

* Double hook block required

** Over front and rear / Double hook block required




TEREX CC 2600 H


500 TON

Lifting capacities
Capacités

Tragfähigkeiten
Capaciteiten



HSSL



DIN
ISO

75%

	72 m						78 m					
	0 t	50 t	100 t	150 t	200 t	250 t	0 t	50 t	100 t	150 t	200 t	250 t
m	t	t	t	t	t	t	t	t	t	t	t	t
10.0	244.0*	263.0*	-	-	-	-	-	-	-	-	-	-
12.0	179.0*	256.0*	263.0*	-	-	-	178.0*	230.0*	-	-	-	-
14.0	138.0	200.0*	262.0*	-	-	-	137.0*	199.0*	230.0*	-	-	-
16.0	111.0	162.0*	214.0*	263.0*	-	-	109.0	161.0*	213.0*	230.0*	-	-
18.0	91.0	135.0	180.0*	224.0*	263.0*	-	90.0	134.0*	179.0*	223.0*	-	-
20.0	77.0	115.0	154.0*	193.0*	232.0*	263.0*	75.0	114.0	153.0*	192.0*	230.0*	-
22.0	65.0	100.0	134.0	169.0*	203.0*	237.0*	64.0	98.0	133.0*	167.0*	202.0*	226.0*
24.0	56.0	87.0	118.0	149.0*	180.0*	211.0*	55.0	86.0	117.0	148.0*	179.0*	210.0*
26.0	49.0	77.0	105.0	133.0	161.0*	190.0*	47.0	76.0	104.0	132.0*	160.0*	188.0*
28.0	43.0	68.0	94.0	120.0	146.0*	172.0*	41.0	67.0	93.0	119.0	145.0*	170.0*
30.0	37.0	61.0	85.0	109.0	133.0	157.0*	36.0	60.0	84.0	108.0	131.0*	155.0*
34.0	28.0	50.0	70.0	91.0	112.0	132.0	27.0	48.0	69.0	90.0	110.0	131.0*
38.0	22.0	41.0	59.0	78.0	96.0	114.0	20.0	39.0	58.0	76.0	94.0	113.0
42.0	16.0	34.0	51.0	67.0	83.0	99.0	15.0	32.0	49.0	65.0	82.0	98.0
46.0	12.0	28.0	43.0	58.0	73.0	88.0	11.0	26.0	42.0	57.0	72.0	86.0
50.0	-	23.0	38.0	51.0	65.0	78.0	-	21.0	36.0	50.0	63.0	77.0
54.0	-	19.0	33.0	45.0	58.0	70.0	-	18.0	31.0	44.0	56.0	69.0
58.0	-	16.0	28.0	40.0	52.0	63.0	-	14.0	26.0	39.0	50.0	62.0
62.0	-	13.0	25.0	36.0	47.0	58.0	-	11.0	23.0	34.0	45.0	56.0
66.0	-	-	-	-	-	-	-	-	20.0	30.0	41.0	51.0
70.0	-	-	-	-	-	-	-	-	17.0	27.0	37.0	47.0
	84 m						90 m					
	0 t	50 t	100 t	150 t	200 t	250 t	0 t	50 t	100 t	150 t	200 t	250 t
12.0	175.0*	203.0*	-	-	-	-	171.0*	-	-	-	-	-
14.0	136.0*	198.0*	-	-	-	-	135.0*	180.0*	-	-	-	-
16.0	109.0	161.0*	203.0*	-	-	-	108.0*	160.0*	180.0*	-	-	-
18.0	89.0	134.0*	178.0*	203.0*	-	-	88.0	133.0*	177.0*	180.0*	-	-
20.0	75.0	114.0*	152.0*	191.0*	203.0*	-	74.0	113.0*	151.0*	178.0*	-	-
22.0	63.0	98.0	132.0*	167.0*	201.0*	-	62.0	97.0	131.0*	166.0*	175.0*	-
24.0	54.0	85.0	116.0*	147.0*	178.0*	201.0*	53.0	84.0	115.0*	146.0*	171.0*	-
26.0	47.0	75.0	103.0	131.0*	160.0*	188.0*	46.0	74.0	102.0	130.0*	159.0*	-
28.0	41.0	67.0	92.0	118.0*	144.0*	170.0*	39.0	65.0	91.0	117.0*	143.0*	163.0*
30.0	35.0	59.0	83.0	107.0	131.0*	155.0*	34.0	58.0	82.0	106.0*	130.0*	154.0*
34.0	26.0	48.0	69.0	89.0	110.0	131.0*	25.0	47.0	67.0	88.0	109.0*	129.0*
38.0	19.0	39.0	57.0	76.0	94.0	112.0*	18.0	37.0	56.0	74.0	93.0	111.0*
42.0	14.0	31.0	48.0	65.0	81.0	97.0	13.0	30.0	47.0	64.0	80.0	96.0
46.0	10.0	26.0	41.0	56.0	71.0	86.0	-	24.0	40.0	55.0	70.0	84.0
50.0	-	21.0	35.0	49.0	62.0	76.0	-	19.0	34.0	48.0	61.0	75.0
54.0	-	17.0	30.0	43.0	55.0	68.0	-	15.0	28.0	41.0	54.0	67.0
58.0	-	13.0	25.0	38.0	50.0	61.0	-	12.0	24.0	36.0	48.0	60.0
62.0	-	10.0	22.0	33.0	44.0	55.0	-	-	20.0	32.0	43.0	54.0
66.0	-	-	19.0	29.0	40.0	50.0	-	-	17.0	28.0	38.0	49.0
70.0	-	-	16.0	26.0	36.0	46.0	-	-	14.0	24.0	34.0	44.0
74.0	-	-	14.0	23.0	32.0	42.0	-	-	12.0	21.0	31.0	40.0
78.0	-	-	-	-	-	-	-	-	10.0	19.0	27.0	36.0

* Double hook block required

** Over front and rear / Double hook block required




TEREX CC 2600 H



Lifting capacities
Capacités

500 TON


Tragfähigkeiten
Capacités




HSSL/LSL



m	108 m							120 m						
	0 t	50 t	100 t	150 t	200 t	250 t	250 t carrier	0 t	50 t	100 t	150 t	200 t	250 t	250 t carrier
16.0	113.0*	-	-	-	-	-	120.0*	-	-	-	-	-	-	-
18.0	93.0*	120.0*	-	-	-	-	120.0*	90.0*	-	-	-	-	-	90.0*
20.0	79.0	118.0*	-	-	-	-	120.0*	76.0	90.0*	-	-	-	-	90.0*
22.0	67.0	102.0*	-	-	-	-	120.0*	64.0	88.0*	-	-	-	-	88.0*
24.0	58.0	89.0	120.0*	-	-	-	120.0*	56.0	85.0*	-	-	-	-	85.0*
26.0	51.0	79.0	107.0*	-	-	-	120.0*	48.0	78.0	82.0*	-	-	-	82.0*
28.0	45.0	71.0	96.0	120.0*	-	-	120.0*	42.0	69.0	80.0*	-	-	-	80.0*
30.0	39.0	63.0	87.0	111.0*	119.0*	-	119.0*	37.0	62.0	77.0	-	-	-	77.0
34.0	31.0	52.0	72.0	93.0*	114.0*	-	114.0*	28.0	50.0	71.0	72.0	-	-	72.0
38.0	24.0	43.0	61.0	79.0	98.0*	107.0*	107.0*	21.0	41.0	60.0	68.0	-	-	68.0
42.0	19.0	36.0	52.0	69.0	85.0	100.0*	100.0*	16.0	34.0	51.0	64.0	-	-	64.0
46.0	14.0	30.0	45.0	60.0	75.0	89.0	89.0	12.0	28.0	44.0	58.0	60.0	-	60.0
50.0	11.0	25.0	39.0	53.0	66.0	80.0	80.0	8.0	23.0	37.0	51.0	57.0	-	57.0
54.0	8.0	21.0	34.0	47.0	59.0	71.0	71.0	5.0	19.0	32.0	45.0	54.0	-	54.0
58.0	5.0	17.0	30.0	42.0	53.0	64.0	64.0	-	15.0	28.0	40.0	51.0	-	51.0
62.0	-	14.0	26.0	37.0	48.0	59.0	59.0	-	12.0	24.0	35.0	46.0	48.0	48.0
66.0	-	12.0	22.0	33.0	43.0	53.0	53.0	-	10.0	21.0	31.0	42.0	46.0	46.0
70.0	-	9.0	19.0	29.0	39.0	49.0	49.0	-	8.0	18.0	28.0	38.0	44.0	44.0
74.0	-	7.0	17.0	26.0	36.0	45.0	45.0	-	6.0	15.0	24.0	34.0	42.0	42.0
78.0	-	6.0	15.0	24.0	32.0	41.0	41.0	-	-	13.0	22.0	31.0	39.0	39.0
82.0	-	-	13.0	21.0	30.0	38.0	38.0	-	-	11.0	19.0	28.0	36.0	36.0



HSSL/LSL



m	108 m						120 m					
	0 t	50 t	100 t	150 t	200 t	250 t	0 t	50 t	100 t	150 t	200 t	250 t
16.0	109.0*	-	-	-	-	-	-	-	-	-	-	-
18.0	91.0	120.0*	-	-	-	-	86.0*	-	-	-	-	-
20.0	77.0	117.0*	-	-	-	-	72.0	90.0*	-	-	-	-
22.0	66.0	102.0*	-	-	-	-	62.0	88.0*	-	-	-	-
24.0	58.0	89.0	120.0*	-	-	-	53.0	85.0*	85.0*	-	-	-
26.0	50.0	79.0	107.0*	-	-	-	46.0	77.0	82.0*	-	-	-
28.0	44.0	70.0	96.0*	120.0*	-	-	40.0	69.0	80.0*	-	-	-
30.0	39.0	63.0	87.0	111.0*	118.0*	-	35.0	61.0	77.0	-	-	-
34.0	30.0	51.0	72.0	93.0*	113.0*	-	27.0	50.0	70.0	72.0	-	-
38.0	23.0	42.0	61.0	79.0	97.0*	107.0*	20.0	41.0	59.0	68.0	-	-
42.0	18.0	35.0	52.0	68.0	84.0	100.0*	15.0	33.0	50.0	64.0	-	-
46.0	13.0	29.0	45.0	59.0	74.0	89.0	11.0	27.0	43.0	58.0	60.0	-
50.0	10.0	24.0	39.0	52.0	66.0	79.0	8.0	22.0	37.0	50.0	57.0	-
54.0	7.0	20.0	33.0	46.0	58.0	71.0	5.0	18.0	31.0	44.0	54.0	-
58.0	-	17.0	29.0	41.0	52.0	64.0	-	15.0	27.0	39.0	51.0	-
62.0	-	14.0	25.0	36.0	47.0	58.0	-	12.0	23.0	34.0	45.0	48.0
66.0	-	11.0	22.0	32.0	43.0	53.0	-	9.0	20.0	30.0	41.0	46.0
70.0	-	9.0	19.0	29.0	39.0	48.0	-	7.0	17.0	27.0	37.0	44.0
74.0	-	7.0	16.0	26.0	35.0	44.0	-	5.0	14.0	23.0	33.0	42.0
78.0	-	5.0	14.0	23.0	32.0	40.0	-	-	12.0	21.0	30.0	38.0
82.0	-	-	12.0	20.0	29.0	37.0	-	-	10.0	18.0	27.0	35.0

* Double hook block required

** Over front and rear / Double hook block required




TEREX CC 2600 H

Working ranges
Portées

500 TON

Arbeitsbereiche
Werkbereich

HSW

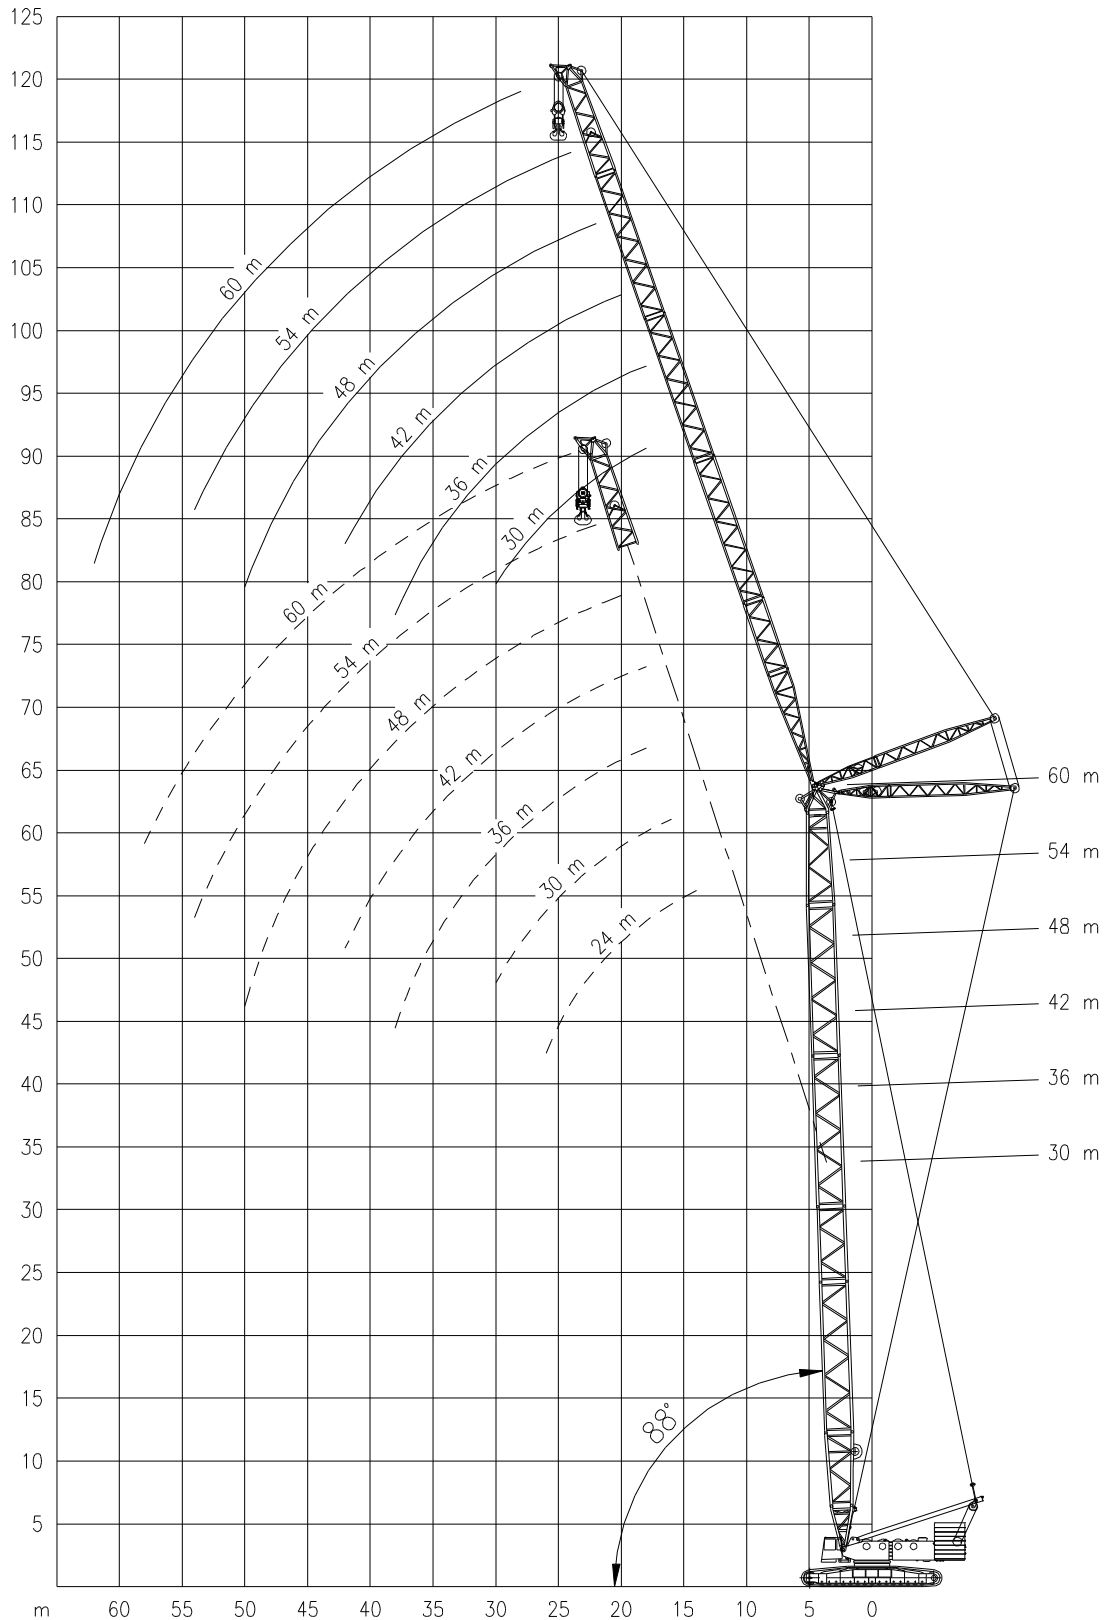




TEREX CC 2600 H


Lifting capacities
Capacités

500 TON

Tragfähigkeiten
Capacités



HSW 88°



	30 m							36 m						
	24m	30m	36m	42m	48m	54m	60m	24m	30m	36m	42m	48m	54m	60m
m	t	t	t	t	t	t	t	t	t	t	t	t	t	t
14.0	145.0*	-	-	-	-	-	-	144.0*	-	-	-	-	-	-
16.0	119.0	118.0	-	-	-	-	-	119.0	118.0	-	-	-	-	-
18.0	101.0	100.0	99.0	98.0	-	-	-	100.0	99.0	99.0	-	-	-	-
20.0	87.0	86.0	86.0	85.0	85.0	-	-	87.0	86.0	85.0	84.0	84.0	-	-
22.0	77.0	76.0	75.0	74.0	74.0	73.0	-	76.0	75.0	75.0	74.0	74.0	73.0	-
24.0	68.0	67.0	67.0	66.0	66.0	65.0	64.0	68.0	67.0	66.0	65.0	65.0	65.0	64.0
26.0	61.0	60.0	60.0	59.0	59.0	58.0	58.0	61.0	60.0	59.0	58.0	58.0	58.0	57.0
28.0	-	54.0	54.0	53.0	53.0	52.0	52.0	-	54.0	53.0	53.0	52.0	52.0	51.0
30.0	-	50.0	49.0	48.0	48.0	47.0	47.0	-	49.0	49.0	48.0	48.0	47.0	47.0
34.0	-	-	41.0	40.0	40.0	40.0	39.0	-	-	41.0	40.0	40.0	39.0	39.0
38.0	-	-	35.0	34.0	34.0	34.0	33.0	-	-	35.0	34.0	34.0	33.0	33.0
42.0	-	-	-	30.0	29.0	29.0	28.0	-	-	-	29.0	29.0	29.0	28.0
46.0	-	-	-	-	26.0	25.0	25.0	-	-	-	-	25.0	25.0	24.0
50.0	-	-	-	-	23.0	22.0	21.0	-	-	-	-	22.0	22.0	21.0
54.0	-	-	-	-	-	19.0	19.0	-	-	-	-	-	19.0	19.0
58.0	-	-	-	-	-	-	17.0	-	-	-	-	-	-	16.0

	42 m							48 m						
	24m	30m	36m	42m	48m	54m	60m	24m	30m	36m	42m	48m	54m	60m
m	t	t	t	t	t	t	t	t	t	t	t	t	t	t
14.0	143.0*	-	-	-	-	-	-	143.0*	-	-	-	-	-	-
16.0	118.0	117.0	-	-	-	-	-	117.0	116.0*	-	-	-	-	-
18.0	100.0	99.0	98.0	-	-	-	-	99.0	98.0	98.0	-	-	-	-
20.0	86.0	85.0	85.0	84.0	-	-	-	86.0	85.0	84.0	83.0	-	-	-
22.0	76.0	75.0	74.0	74.0	73.0	73.0	-	75.0	74.0	74.0	73.0	73.0	-	-
24.0	67.0	66.0	66.0	65.0	65.0	64.0	64.0	67.0	66.0	65.0	64.0	64.0	64.0	63.0
26.0	60.0	59.0	59.0	58.0	58.0	57.0	57.0	60.0	59.0	58.0	58.0	57.0	57.0	56.0
28.0	-	54.0	53.0	53.0	52.0	52.0	51.0	-	53.0	53.0	52.0	52.0	51.0	51.0
30.0	-	49.0	48.0	48.0	47.0	47.0	46.0	-	48.0	48.0	47.0	47.0	46.0	46.0
34.0	-	-	40.0	40.0	39.0	39.0	38.0	-	-	40.0	39.0	39.0	39.0	38.0
38.0	-	-	35.0	34.0	34.0	33.0	33.0	-	-	34.0	33.0	33.0	33.0	32.0
42.0	-	-	-	29.0	29.0	28.0	28.0	-	-	-	29.0	29.0	28.0	28.0
46.0	-	-	-	-	25.0	25.0	24.0	-	-	-	-	25.0	24.0	24.0
50.0	-	-	-	-	22.0	22.0	21.0	-	-	-	-	22.0	21.0	21.0
54.0	-	-	-	-	-	19.0	18.0	-	-	-	-	-	19.0	18.0
58.0	-	-	-	-	-	-	16.0	-	-	-	-	-	-	16.0
62.0	-	-	-	-	-	-	14.0	-	-	-	-	-	-	14.0

	54 m							60 m						
	24m	30m	36m	42m	48m	54m	60m	24m	30m	36m	42m	48m	54m	60m
m	t	t	t	t	t	t	t	t	t	t	t	t	t	t
16.0	116.0*	116.0*	-	-	-	-	-	-	-	-	-	-	-	-
18.0	98.0	98.0	97.0	-	-	-	-	-	97.0	96.0*	-	-	-	-
20.0	85.0	84.0	84.0	83.0	-	-	-	-	83.0	83.0	82.0	-	-	-
22.0	74.0	74.0	73.0	72.0	72.0	-	-	-	73.0	72.0	72.0	70.0	-	-
24.0	66.0	65.0	65.0	64.0	64.0	63.0	-	-	65.0	64.0	63.0	63.0	63.0	-
26.0	59.0	58.0	58.0	57.0	57.0	57.0	56.0	-	58.0	57.0	57.0	57.0	56.0	-
28.0	-	53.0	52.0	51.0	51.0	51.0	50.0	-	52.0	52.0	51.0	51.0	50.0	50.0
30.0	-	48.0	47.0	47.0	47.0	46.0	46.0	-	47.0	47.0	46.0	46.0	46.0	45.0
34.0	-	-	40.0	39.0	39.0	38.0	38.0	-	-	39.0	38.0	38.0	38.0	38.0
38.0	-	-	34.0	33.0	33.0	32.0	32.0	-	-	33.0	33.0	33.0	32.0	32.0
42.0	-	-	-	28.0	28.0	28.0	27.0	-	-	-	28.0	28.0	28.0	27.0
46.0	-	-	-	-	25.0	24.0	24.0	-	-	-	-	24.0	24.0	23.0
50.0	-	-	-	-	22.0	21.0	21.0	-	-	-	-	21.0	21.0	20.0
54.0	-	-	-	-	-	18.0	18.0	-	-	-	-	-	18.0	18.0
58.0	-	-	-	-	-	-	16.0	-	-	-	-	-	-	15.0
62.0	-	-	-	-	-	-	14.0	-	-	-	-	-	-	13.0

* Double hook block required




TEREX CC 2600 H

Working ranges
Portées

500 TON

Arbeitsbereiche
Werkbereich

HSWSL

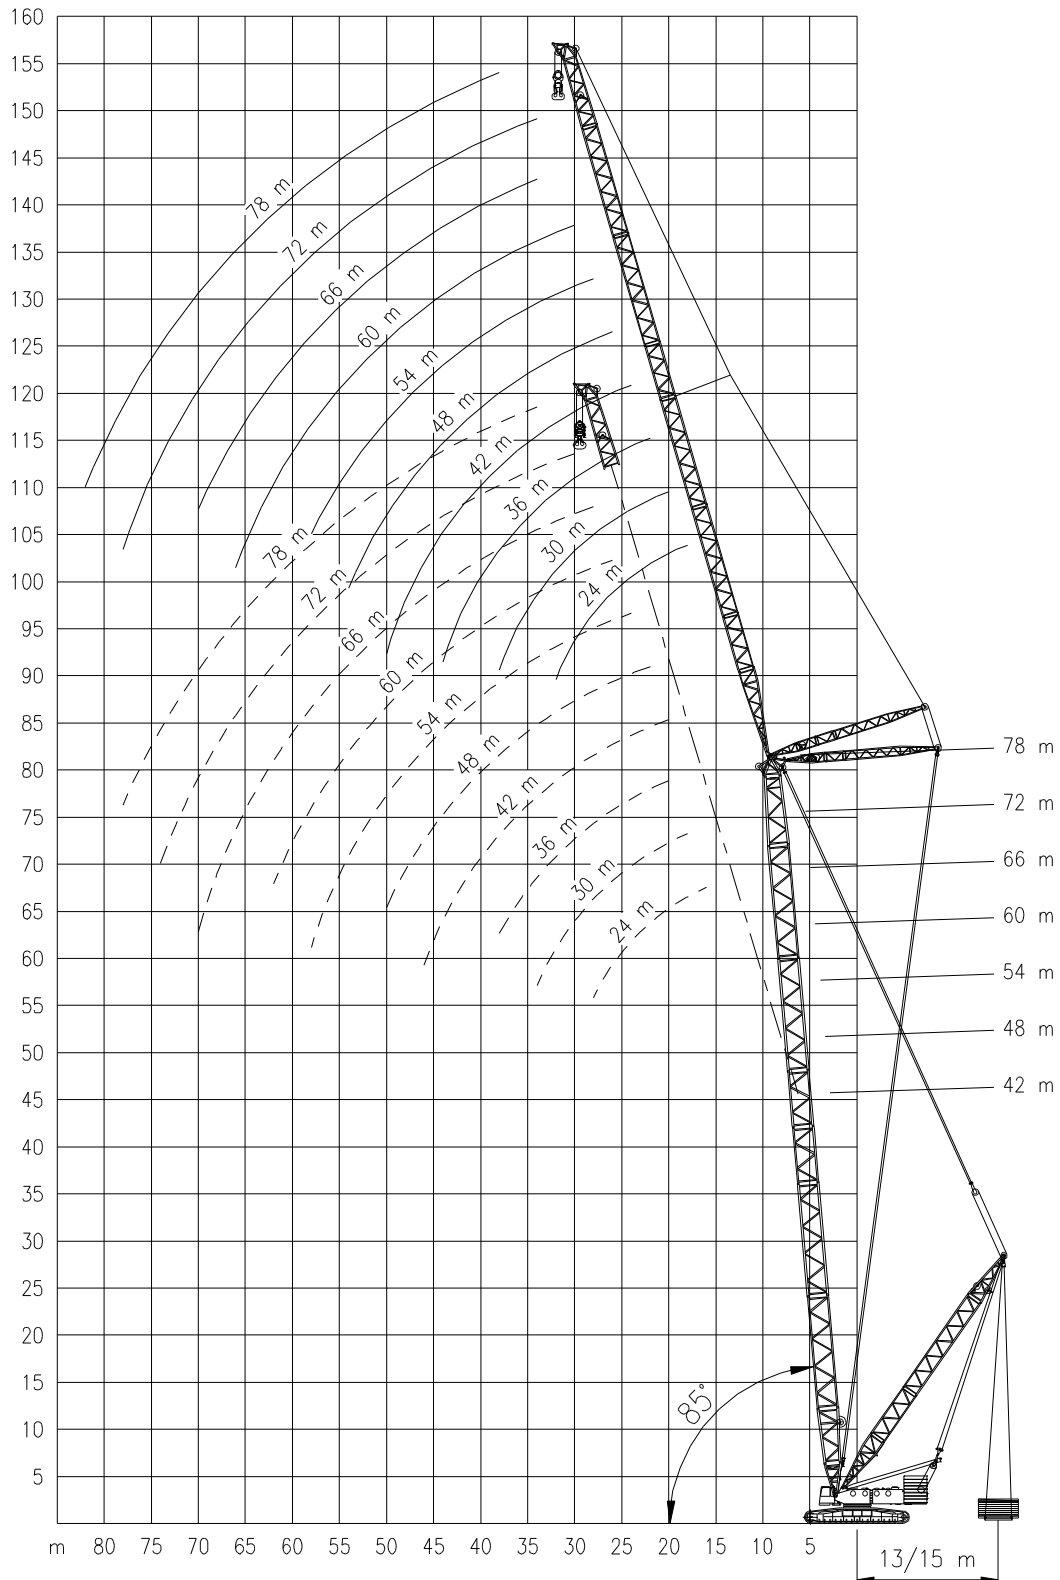




TEREX CC 2600 H



Lifting capacities
Capacités

500 TON

Tragfähigkeiten
Capacités



HSWSL-85°



Main Boom	Fly Jib	m	0t	50t	100t	150t	200t	250t carrier	Main Boom	Fly Jib	m	0t	50t	100t	150t	200t	250t carrier
			t	t	t	t	t	t				t	t	t	t	t	t
42 m	24 m	16.0	125.0	181.0*	236.0*	255.0*	-	270.0*	42 m	66 m	28.0	52.0	79.0	79.0	-	-	79.0
		18.0	105.0	153.0*	201.0*	249.0*	-	258.0*			30.0	47.0	73.0	79.0	-	-	79.0
		20.0	91.0	133.0	175.0*	217.0*	247.0*	255.0*			34.0	38.0	61.0	79.0	-	-	79.0
		22.0	79.0	117.0	154.0*	191.0*	229.0*	249.0*			38.0	32.0	52.0	72.0	-	-	77.0
		24.0	70.0	104.0	138.0	171.0*	205.0*	219.0*			42.0	27.0	45.0	63.0	75.0	-	75.0
		26.0	63.0	93.0	124.0	155.0*	185.0*	195.0*			46.0	23.0	39.0	55.0	71.0	-	72.0
		28.0	57.0	85.0	113.0	141.0	165.0*	170.0*			50.0	20.0	35.0	49.0	64.0	-	69.0
		30.0	50.0	76.0	102.0	128.0*	154.0*	164.0*			54.0	17.0	31.0	44.0	58.0	-	65.0
	30 m	18.0	104.0	152.0*	200.0*	217.0*	-	223.0*		72 m	58.0	14.0	27.0	40.0	52.0	-	62.0
		20.0	89.0	131.0*	173.0*	214.0*	-	221.0*			62.0	12.0	25.0	36.0	48.0	-	53.0
		22.0	78.0	115.0	153.0*	190.0*	212.0*	219.0*			66.0	10.0	22.0	33.0	44.0	-	46.0
		24.0	69.0	103.0	136.0*	170.0*	203.0*	216.0*			70.0	-	20.0	30.0	38.0	-	38.0
		26.0	62.0	92.0	123.0	153.0*	184.0*	201.0*			30.0	46.0	66.0	-	-	-	66.0
		28.0	56.0	84.0	112.0	140.0*	168.0*	180.0*			34.0	38.0	61.0	66.0	-	-	66.0
		30.0	50.0	76.0	102.0	128.0*	154.0*	164.0*			38.0	32.0	52.0	66.0	-	-	66.0
		34.0	42.0	65.0	87.0	109.0	-	129.0			42.0	27.0	45.0	62.0	-	-	65.0
	36 m	20.0	89.0	131.0*	173.0*	183.0*	-	189.0*		78 m	46.0	23.0	39.0	55.0	65.0	-	65.0
		22.0	78.0	115.0	153.0*	182.0*	-	188.0*			50.0	19.0	34.0	49.0	53.0	-	65.0
		24.0	69.0	103.0	136.0*	170.0*	-	186.0*			54.0	16.0	30.0	44.0	57.0	-	64.0
		26.0	62.0	92.0	123.0*	153.0*	179.0*	185.0*			58.0	14.0	27.0	39.0	52.0	-	62.0
		28.0	55.0	83.0	111.0	139.0*	167.0*	183.0*			62.0	12.0	24.0	36.0	47.0	-	55.0
		30.0	50.0	76.0	102.0	128.0*	154.0*	168.0*			66.0	10.0	22.0	32.0	43.0	-	48.0
		34.0	42.0	64.0	87.0	109.0	132.0*	141.0*			70.0	-	19.0	30.0	38.0	-	42.0
		38.0	36.0	55.0	75.0	95.0	112.0	116.0			74.0	-	17.0	27.0	36.0	-	36.0
	42 m	20.0	88.0	130.0*	156.0*	-	-	161.0*		30 m	34.0	37.0	54.0	-	-	-	54.0
		22.0	77.0	114.0*	151.0*	-	-	161.0*			38.0	31.0	51.0	54.0	-	-	54.0
		24.0	68.0	101.0	135.0*	155.0*	-	160.0*			42.0	26.0	44.0	54.0	-	-	54.0
		26.0	60.0	91.0	121.0*	152.0*	-	160.0*			46.0	22.0	38.0	53.0	-	-	53.0
		28.0	54.0	82.0	110.0*	138.0*	-	159.0*			50.0	18.0	33.0	48.0	53.0	-	53.0
		30.0	49.0	75.0	101.0	127.0*	152.0*	158.0*			54.0	15.0	29.0	43.0	53.0	-	53.0
		34.0	41.0	63.0	86.0	108.0*	130.0*	143.0*			58.0	13.0	26.0	39.0	51.0	-	53.0
		38.0	35.0	54.0	74.0	94.0	114.0*	119.0*			62.0	11.0	23.0	35.0	46.0	-	52.0
		42.0	30.0	47.0	65.0	83.0	-	99.0			66.0	-	20.0	32.0	42.0	-	49.0
		46.0	26.0	42.0	58.0	74.0	-	80.0			70.0	-	18.0	29.0	38.0	-	44.0
	48 m	22.0	76.0	114.0*	132.0*	-	-	137.0*		36 m	74.0	-	16.0	26.0	36.0	-	38.0
		24.0	67.0	101.0	132.0*	-	-	137.0*			78.0	-	14.0	24.0	33.0	-	33.0
		26.0	60.0	91.0	121.0*	-	-	137.0*			18.0	102.0	150.0*	189.0*	-	-	189.0*
		28.0	54.0	82.0	110.0*	132.0*	-	137.0*			20.0	88.0	130.0*	172.0*	189.0*	-	189.0*
		30.0	49.0	75.0	101.0	126.0*	-	136.0*			22.0	77.0	114.0	151.0*	187.0*	-	187.0*
		34.0	41.0	63.0	85.0	108.0*	130.0*	135.0*			24.0	68.0	102.0	135.0*	169.0*	-	184.0*
		38.0	34.0	54.0	74.0	94.0	113.0*	124.0*			26.0	61.0	91.0	122.0*	152.0*	181.0*	181.0*
		42.0	29.0	47.0	65.0	82.0	100.0	105.0			28.0	55.0	83.0	111.0	139.0*	167.0*	177.0*
		46.0	25.0	41.0	57.0	73.0	86.0	89.0			30.0	49.0	75.0	101.0	127.0*	153.0*	162.0*
		50.0	22.0	37.0	51.0	66.0	-	75.0			34.0	41.0	64.0	86.0	109.0	129.0*	129.0*
	54 m	24.0	66.0	100.0*	113.0*	-	-	113.0*	48 m	42 m	20.0	88.0	130.0*	161.0*	-	-	161.0*
		26.0	59.0	89.0	113.0*	-	-	113.0*			22.0	77.0	114.0*	151.0*	-	-	161.0*
		28.0	53.0	81.0	109.0*	-	-	113.0*			24.0	68.0	101.0	135.0*	160.0*	-	160.0*
		30.0	48.0	74.0	99.0*	112.0*	-	112.0*			26.0	61.0	91.0	122.0*	152.0*	-	158.0*
		34.0	39.0	62.0	84.0	107.0*	-	109.0*			28.0	54.0	82.0	110.0*	139.0*	-	156.0*
		38.0	33.0	53.0	73.0	92.0	-	104.0*			30.0	49.0	75.0	101.0	127.0*	153.0*	153.0*
		42.0	28.0	46.0	64.0	81.0	98.0*	98.0*			34.0	41.0	64.0	86.0	108.0*	129.0*	140.0*
		46.0	24.0	40.0	56.0	72.0	88.0	88.0			38.0	35.0	55.0	74.0	94.0	114.0*	115.0*
		50.0	21.0	35.0	50.0	65.0	76.0	76.0			22.0	75.0	113.0*	139.0*	-	-	139.0*
		54.0	18.0	32.0	45.0	59.0	-	66.0			24.0	67.0	100.0	134.0*	-	-	139.0*
	60 m	58.0	16.0	29.0	41.0	53.0	-	54.0			26.0	59.0	90.0	120.0*	138.0*	-	138.0*
		62.0	14.0	26.0	37.0	49.0	-	50.0			28.0	53.0	81.0	109.0*	137.0*	-	137.0*
											30.0	48.0	74.0	100.0	126.0*	-	136.0*
											34.0	40.0	62.0	85.0	107.0*	130.0*	132.0*
											38.0	34.0	54.0	73.0	93.0	113.0*	118.0*
											42.0	29.0	47.0	64.0	82.0	98.0	98.0
											46.0	25.0	41.0	57.0	73.0	-	80.0

* Double hook block required




TEREX CC 2600 H


Lifting capacities
Capacités

500 TON

Tragfähigkeiten
Capacités



HSWSL-85°



Main Boom	Fly Jib	m	0t	50t	100t	150t	200t	250t carrier	Main Boom	Fly Jib	m	0t	50t	100t	150t	200t	250t carrier
			t	t	t	t	t	t				t	t	t	t	t	t
48 m	48 m	24.0	66.0	100.0*	119.0*	-	-	119.0*	54 m	24 m (1)	16.0	122.0*	174.0*	176.0*	-	-	-
		26.0	59.0	90.0	119.0*	-	-	119.0*			18.0	103.0	147.0*	176.0*	-	-	-
		28.0	53.0	81.0	109.0*	-	-	119.0*			20.0	89.0	128.0*	166.0*	176.0*	-	-
		30.0	48.0	74.0	100.0*	118.0*	-	118.0*			22.0	78.0	112.0	147.0*	168.0*	-	-
		34.0	40.0	62.0	85.0	107.0*	-	116.0*			24.0	69.0	100.0	131.0*	159.0*	-	-
		38.0	34.0	53.0	73.0	93.0*	113.0*	113.0*			26.0	61.0	90.0	118.0*	146.0*	-	-
		42.0	29.0	46.0	64.0	82.0	100.0*	104.0*			28.0	55.0	81.0	107.0	133.0*	-	-
		46.0	25.0	41.0	57.0	73.0	88.0	88.0			30.0	50.0	74.0	98.0	122.0*	-	-
		50.0	22.0	36.0	51.0	65.0	-	74.0		30 m (1)	18.0	102.0	146.0*	155.0*	-	-	-
		26.0	58.0	88.0	103.0*	-	-	103.0*			20.0	87.0	126.0*	155.0*	-	-	-
		28.0	52.0	80.0	103.0*	-	-	103.0*			22.0	76.0	110.0	145.0*	155.0*	-	-
		30.0	47.0	73.0	98.0*	-	-	102.0*			24.0	67.0	98.0	129.0*	150.0*	-	-
		34.0	39.0	61.0	83.0	100.0*	-	100.0*			26.0	60.0	88.0	116.0	142.0*	-	-
		38.0	32.0	52.0	72.0	92.0	-	97.0*			28.0	54.0	80.0	106.0	132.0*	-	-
		42.0	28.0	45.0	63.0	81.0	-	92.0			30.0	49.0	73.0	97.0	120.0*	-	-
		46.0	24.0	40.0	56.0	72.0	-	86.0			34.0	41.0	62.0	82.0	103.0	-	-
		50.0	20.0	35.0	50.0	64.0	-	78.0			36.0	38.0	57.0	76.0	96.0	-	-
	54 m	54.0	17.0	31.0	45.0	58.0	-	66.0		36 m	20.0	86.0	128.0*	144.0*	-	-	148.0*
		58.0	15.0	28.0	40.0	53.0	-	56.0			22.0	75.0	113.0*	144.0*	-	-	148.0*
		28.0	52.0	80.0*	87.0*	-	-	87.0*			24.0	67.0	100.0	134.0*	-	-	146.0*
		30.0	47.0	73.0	87.0*	-	-	87.0*			26.0	59.0	90.0	121.0*	139.0*	-	143.0*
		34.0	39.0	61.0	84.0*	-	-	87.0*			28.0	53.0	81.0	109.0*	136.0*	-	141.0*
		38.0	33.0	52.0	72.0	84.0*	-	84.0*			30.0	48.0	74.0	100.0	126.0*	-	138.0*
		42.0	28.0	45.0	63.0	79.0	-	79.0			34.0	40.0	63.0	85.0	107.0*	-	132.0*
		46.0	24.0	40.0	56.0	72.0	-	73.0			38.0	34.0	54.0	74.0	93.0	-	122.0*
		50.0	20.0	35.0	50.0	64.0	-	67.0			42.0	29.0	47.0	65.0	82.0	-	97.0
		54.0	17.0	31.0	45.0	58.0	-	61.0		42 m	22.0	74.0	111.0*	125.0*	-	-	128.0*
	60 m	58.0	15.0	28.0	40.0	53.0	-	55.0			24.0	65.0	99.0*	125.0*	-	-	128.0*
		62.0	13.0	25.0	37.0	48.0	-	51.0			26.0	58.0	89.0	119.0*	-	-	127.0*
		28.0	51.0	74.0	-	-	-	74.0			28.0	52.0	80.0	108.0*	121.0*	-	125.0*
		30.0	46.0	72.0	74.0	-	-	74.0			30.0	47.0	73.0	99.0*	119.0*	-	123.0*
		34.0	38.0	60.0	74.0	-	-	74.0			34.0	39.0	61.0	84.0	106.0*	-	120.0*
		38.0	32.0	51.0	71.0	-	-	73.0			38.0	33.0	53.0	73.0	92.0	-	116.0*
		42.0	27.0	44.0	62.0	72.0	-	72.0			42.0	28.0	46.0	64.0	81.0	-	104.0*
		46.0	23.0	39.0	55.0	69.0	-	69.0			46.0	24.0	40.0	56.0	72.0	-	85.0
		50.0	19.0	34.0	49.0	63.0	-	67.0		48 m	24.0	65.0	99.0*	106.0*	-	-	110.0*
		54.0	16.0	30.0	44.0	57.0	-	63.0			26.0	58.0	89.0	106.0*	-	-	110.0*
		58.0	14.0	27.0	39.0	52.0	-	60.0			28.0	52.0	80.0	106.0*	-	-	110.0*
		62.0	12.0	24.0	36.0	47.0	-	54.0			30.0	47.0	73.0	99.0*	-	-	109.0*
		66.0	10.0	21.0	32.0	43.0	-	46.0			34.0	39.0	61.0	84.0	103.0*	-	106.0*
		70.0	-	19.0	30.0	39.0	-	39.0			38.0	33.0	53.0	72.0	92.0	-	104.0*
	66 m	74.0	-	17.0	27.0	36.0	-	37.0			42.0	28.0	46.0	63.0	81.0	97.0*	100.0*
		30.0	45.0	62.0	-	-	-	62.0			46.0	24.0	40.0	56.0	72.0	88.0	93.0*
		34.0	37.0	60.0	62.0	-	-	62.0		54 m	50.0	21.0	36.0	50.0	65.0	76.0	78.0
		38.0	31.0	51.0	62.0	-	-	62.0			26.0	57.0	87.0*	93.0*	-	-	96.0*
		42.0	26.0	44.0	62.0	-	-	62.0			28.0	51.0	79.0	93.0*	-	-	96.0*
		46.0	22.0	38.0	54.0	62.0	-	62.0			30.0	46.0	72.0	93.0*	-	-	96.0*
		50.0	19.0	34.0	48.0	61.0	-	61.0			34.0	38.0	60.0	83.0*	92.0*	-	95.0*
		54.0	16.0	30.0	43.0	57.0	-	61.0			38.0	32.0	51.0	71.0	89.0*	-	92.0*
		58.0	13.0	26.0	39.0	51.0	60.0	60.0			42.0	27.0	45.0	62.0	80.0*	-	88.0*
		62.0	11.0	24.0	35.0	47.0	55.0	55.0			46.0	23.0	39.0	55.0	71.0	-	83.0*
		66.0	-	21.0	32.0	43.0	49.0	49.0			50.0	19.0	34.0	49.0	64.0	-	78.0
		70.0	-	19.0	29.0	39.0	-	43.0		60 m	54.0	17.0	31.0	44.0	57.0	-	70.0
	72 m	74.0	-	17.0	27.0	36.0	-	37.0			58.0	14.0	27.0	40.0	52.0	-	59.0
		34.0	37.0	51.0	-	-	-	51.0			28.0	51.0	79.0	81.0*	-	-	81.0*
		38.0	30.0	50.0	51.0	-	-	51.0			30.0	46.0	72.0	81.0*	-	-	81.0*
		42.0	25.0	43.0	51.0	-	-	51.0			34.0	38.0	61.0	81.0*	-	-	81.0*
		46.0	21.0	38.0	51.0	-	-	51.0			38.0	32.0	52.0	72.0	79.0	-	79.0
		50.0	18.0	33.0	48.0	50.0	-	50.0			42.0	27.0	45.0	63.0	76.0	-	76.0
		54.0	15.0	29.0	42.0	50.0	-	50.0			46.0	23.0	39.0	55.0	71.0	-	71.0
		58.0	12.0	26.0	38.0	50.0	-	50.0			50.0	19.0	34.0	49.0	64.0	-	66.0
		62.0	10.0	23.0	34.0	46.0	-	49.0			54.0	17.0	31.0	44.0	57.0	-	61.0
	78 m	66.0	-	20.0	31.0	42.0	48.0	48.0			58.0	14.0	27.0	40.0	52.0	-	56.0
		70.0	-	18.0	28.0	38.0	44.0	44.0			62.0	12.0	25.0	36.0	48.0	-	52.0
		74.0	-	16.0	26.0	35.0	39.0	39.0									
		78.0	-	14.0	24.0	33.0	-	34.0									
		82.0	-	12.0	22.0	28.0	-	28.0									

* Double hook block required

(1) Short luffing jibs – superlift at 13 m – Min weight of hook block : 5.5 t




TEREX CC 2600 H



Lifting capacities
Capacités

500 TON

Tragfähigkeiten
Capacités



HSWSL-85°



Main Boom	Fly Jib	m	0t	50t	100t	150t	200t	250t carrier	Main Boom	Fly Jib	m	0t	50t	100t	150t	200t	250t carrier
			t	t	t	t	t	t				t	t	t	t	t	t
54 m	66 m	30.0	45.0	69.0*	69.0*	-	-	69.0*	60 m	42 m	22.0	73.0	109.0*	-	-	-	109.0*
		34.0	37.0	59.0	69.0*	-	-	69.0*			24.0	64.0	98.0*	109.0*	-	-	109.0*
		38.0	31.0	51.0	69.0*	-	-	69.0*			26.0	57.0	88.0	109.0*	-	-	109.0*
		42.0	26.0	44.0	61.0	68.0*	-	68.0*			28.0	51.0	79.0	107.0*	-	-	107.0*
		46.0	22.0	38.0	54.0	66.0	-	66.0			30.0	46.0	72.0	98.0*	-	-	105.0*
		50.0	18.0	33.0	48.0	63.0	-	64.0			34.0	38.0	61.0	83.0	102.0*	-	102.0*
		54.0	16.0	30.0	43.0	56.0	-	61.0			38.0	32.0	52.0	72.0	91.0	-	98.0*
		58.0	13.0	26.0	39.0	51.0	-	58.0			42.0	27.0	45.0	63.0	80.0	-	94.0*
		62.0	11.0	23.0	35.0	47.0	-	55.0			46.0	24.0	40.0	56.0	72.0	-	84.0
		66.0	-	21.0	32.0	43.0	-	47.0		48 m	24.0	64.0	95.0*	-	-	-	95.0*
	72 m	70.0	-	19.0	29.0	39.0	-	40.0			26.0	57.0	87.0*	95.0*	-	-	95.0*
		34.0	37.0	59.0	59.0	-	-	59.0			28.0	51.0	79.0	95.0*	-	-	95.0*
		38.0	30.0	50.0	59.0	-	-	59.0			30.0	46.0	72.0	94.0*	-	-	94.0*
		42.0	26.0	43.0	59.0	-	-	59.0			34.0	38.0	61.0	83.0*	-	-	91.0*
		46.0	21.0	38.0	54.0	58.0	-	58.0			38.0	32.0	52.0	72.0	88.0*	-	88.0*
		50.0	18.0	33.0	48.0	58.0	-	58.0			42.0	27.0	45.0	63.0	80.0*	-	85.0*
		54.0	15.0	29.0	43.0	56.0	-	57.0			46.0	23.0	39.0	55.0	71.0	-	82.0*
		58.0	13.0	26.0	38.0	51.0	-	56.0			50.0	20.0	35.0	50.0	64.0	-	77.0
		62.0	11.0	23.0	35.0	46.0	55.0	55.0			54.0	17.0	31.0	45.0	58.0	-	63.0
	78 m	66.0	-	20.0	32.0	42.0	50.0	50.0		54 m	28.0	56.0	84.0*	-	-	-	84.0*
		70.0	-	18.0	29.0	39.0	44.0	44.0			30.0	50.0	78.0	84.0*	-	-	84.0*
		74.0	-	16.0	26.0	36.0	-	38.0			34.0	45.0	71.0	84.0*	-	-	84.0*
		34.0	36.0	48.0	-	-	-	48.0			38.0	37.0	59.0	82.0*	-	-	82.0*
		38.0	30.0	48.0	48.0	-	-	48.0			42.0	31.0	51.0	70.0	80.0*	-	80.0*
		42.0	25.0	42.0	48.0	-	-	48.0			46.0	26.0	44.0	61.0	77.0	-	77.0
		46.0	21.0	37.0	48.0	-	-	48.0			50.0	22.0	38.0	54.0	70.0	-	73.0
		50.0	17.0	32.0	47.0	-	-	48.0			54.0	19.0	34.0	48.0	63.0	-	70.0
		54.0	14.0	28.0	42.0	48.0	-	48.0			58.0	16.0	30.0	43.0	57.0	-	66.0
		58.0	12.0	25.0	38.0	47.0	-	47.0			62.0	14.0	27.0	39.0	52.0	-	58.0
60 m	24 m (1)	66.0	10.0	22.0	34.0	45.0	-	47.0		60 m	28.0	50.0	73.0*	-	-	-	73.0*
		70.0	-	19.0	31.0	42.0	46.0	46.0			30.0	45.0	71.0*	73.0*	-	-	73.0*
		74.0	-	17.0	28.0	38.0	44.0	44.0			34.0	37.0	60.0	73.0*	-	-	73.0*
		78.0	-	13.0	23.0	32.0	-	34.0			38.0	31.0	51.0	70.0*	-	-	72.0*
		82.0	-	12.0	21.0	29.0	-	29.0			42.0	26.0	44.0	61.0	69.0*	-	69.0*
	30 m (1)	16.0	120.0*	170.0*	170.0*	-	-	-			46.0	22.0	38.0	54.0	66.0	-	66.0
		18.0	101.0	146.0*	170.0*	-	-	-			50.0	19.0	34.0	48.0	63.0	-	63.0
		20.0	87.0	126.0*	165.0	170.0*	-	-			54.0	16.0	30.0	43.0	57.0	-	59.0
		22.0	76.0	111.0	145.0*	167.0*	-	-			58.0	14.0	27.0	39.0	52.0	-	55.0
		24.0	67.0	98.0	129.0*	160.0*	-	-			62.0	12.0	24.0	36.0	47.0	-	51.0
		26.0	60.0	88.0	117.0*	145.0*	-	-		66 m	30.0	44.0	63.0	-	-	-	63.0
		28.0	54.0	80.0	106.0	132.0*	-	-			34.0	36.0	58.0	63.0	-	-	63.0
		30.0	49.0	73.0	97.0	121.0*	-	-			38.0	30.0	50.0	63.0	-	-	63.0
		18.0	100.0	143.0*	143.0*	-	-	-			42.0	25.0	43.0	61.0	-	-	62.0
		20.0	86.0	124.0*	143.0*	-	-	-			46.0	21.0	37.0	53.0	60.0	-	60.0
		22.0	75.0	109.0*	143.0*	-	-	-			50.0	18.0	33.0	47.0	59.0	-	59.0
		24.0	66.0	97.0	128.0*	142.0*	-	-			54.0	15.0	29.0	42.0	56.0	-	57.0
		26.0	59.0	87.0	115.0*	137.0*	-	-			58.0	12.0	26.0	38.0	51.0	-	55.0
		28.0	53.0	79.0	105.0*	130.0*	-	-			62.0	10.0	23.0	35.0	46.0	-	52.0
		30.0	48.0	72.0	96.0	119.0*	-	-			66.0	-	20.0	31.0	42.0	-	48.0
	36 m	34.0	40.0	61.0	81.0	102.0	118.0*	-			70.0	-	18.0	29.0	39.0	-	41.0
		36.0	37.0	56.0	75.0	95.0	105.0*	-		72 m	34.0	36.0	54.0	-	-	-	54.0
		20.0	85.0	127.0*	127.0*	-	-	127.0*			38.0	30.0	49.0	54.0	-	-	54.0
		22.0	74.0	111.0*	127.0*	-	-	127.0*			42.0	25.0	43.0	54.0	-	-	54.0
		24.0	65.0	99.0*	125.0*	-	-	125.0*			46.0	21.0	37.0	53.0	-	-	53.0
		26.0	58.0	89.0	119.0*	-	-	122.0*			50.0	17.0	32.0	47.0	52.0	-	52.0
		28.0	52.0	80.0	108.0*	120.0*	-	120.0*			54.0	15.0	29.0	42.0	52.0	-	52.0
		30.0	47.0	73.0	99.0*	117.0*	-	117.0*			58.0	12.0	25.0	38.0	50.0	-	51.0
		34.0	39.0	62.0	84.0	107.0*	-	113.0*			62.0	10.0	22.0	34.0	46.0	-	50.0
		38.0	33.0	53.0	73.0	93.0*	-	108.0*			66.0	-	20.0	31.0	42.0	-	48.0
		42.0	29.0	46.0	64.0	82.0	-	97.0*			70.0	-	18.0	28.0	38.0	-	44.0

* Double hook block required

(1) Short luffing jibs – superlift at 13 m – Min weight of hook block : 5.5 t




TEREX CC 2600 H



Lifting capacities
Capacités

500 TON

Tragfähigkeiten
Capacités



HSWSL-85°



Main Boom	Fly Jib	m	0t	50t	100t	150t	200t	250t carrier	Main Boom	Fly Jib	m	0t	50t	100t	150t	200t	250t carrier
			t	t	t	t	t	t				t	t	t	t	t	t
60 m	78 m	34.0	35.0	43.0	-	-	-	43.0	60 m	78 m	28.0	49.0	66.0	-	-	-	66.0
		38.0	29.0	43.0	-	-	-	43.0			30.0	44.0	66.0	-	-	-	66.0
		42.0	24.0	42.0	43.0	-	-	43.0			34.0	36.0	58.0	66.0	-	-	66.0
		46.0	20.0	36.0	43.0	-	-	43.0			38.0	30.0	50.0	65.0	-	-	65.0
		50.0	16.0	32.0	43.0	-	-	43.0			42.0	25.0	43.0	61.0	-	-	63.0
		54.0	14.0	28.0	41.0	-	-	42.0			46.0	21.0	38.0	53.0	61.0	-	61.0
		58.0	11.0	24.0	37.0	42.0	-	42.0			50.0	18.0	33.0	48.0	59.0	-	59.0
		62.0	-	21.0	33.0	41.0	-	41.0			54.0	15.0	29.0	43.0	56.0	-	56.0
		66.0	-	19.0	30.0	41.0	-	41.0			58.0	13.0	26.0	39.0	51.0	-	54.0
		70.0	-	17.0	27.0	38.0	-	40.0			62.0	11.0	24.0	35.0	47.0	-	51.0
		74.0	-	15.0	25.0	35.0	-	39.0			66.0	10.0	21.0	32.0	43.0	-	47.0
		78.0	-	13.0	23.0	32.0	-	35.0			30.0	43.0	57.0	-	-	-	57.0
		82.0	-	11.0	21.0	29.0	-	30.0			34.0	35.0	57.0	57.0	-	-	57.0
66 m	24 m (1)	18.0	100.0	144.0*	150.0*	-	-	-	66 m	66 m	38.0	29.0	49.0	57.0	-	-	57.0
		20.0	86.0	124.0*	150.0*	-	-	-			42.0	24.0	42.0	56.0	-	-	56.0
		22.0	75.0	109.0*	144.0*	149.0*	-	-			46.0	20.0	37.0	53.0	-	-	55.0
		24.0	66.0	97.0	128.0*	144.0*	-	-			50.0	17.0	32.0	47.0	54.0	-	54.0
		26.0	59.0	87.0	115.0*	140.0*	-	-			54.0	14.0	28.0	42.0	52.0	-	52.0
		28.0	53.0	79.0	105.0*	131.0*	-	-			58.0	12.0	25.0	38.0	50.0	-	51.0
	30 m (1)	30.0	48.0	72.0	96.0	120.0*	-	-			62.0	10.0	22.0	34.0	46.0	-	49.0
		20.0	84.0	122.0*	122.0*	-	-	-		72 m	66.0	-	20.0	31.0	42.0	-	47.0
		22.0	73.0	108.0*	122.0*	-	-	-			70.0	-	18.0	28.0	38.0	-	42.0
		24.0	65.0	96.0*	122.0*	-	-	-			34.0	35.0	50.0	-	-	-	50.0
		26.0	57.0	86.0	114.0*	121.0*	-	-			38.0	29.0	49.0	50.0	-	-	50.0
		28.0	52.0	77.0	103.0*	119.0*	-	-			42.0	24.0	42.0	49.0	-	-	49.0
	36 m	30.0	47.0	71.0	94.0*	116.0*	-	-			46.0	20.0	36.0	48.0	-	-	48.0
		34.0	39.0	59.0	80.0	101.0*	-	-		78 m	50.0	17.0	32.0	46.0	-	-	48.0
		36.0	36.0	55.0	74.0	94.0	-	-			54.0	14.0	28.0	42.0	47.0	-	47.0
		22.0	73.0	110.0*	112.0*	-	-	116.0*			58.0	11.0	25.0	37.0	46.0	-	46.0
		24.0	64.0	98.0*	110.0*	-	-	113.0*			62.0	-	22.0	34.0	45.0	-	45.0
		26.0	57.0	88.0	108.0*	-	-	111.0*			66.0	-	19.0	31.0	41.0	-	44.0
	42 m	28.0	51.0	79.0	105.0*	-	-	109.0*			70.0	-	17.0	28.0	38.0	-	43.0
		30.0	46.0	72.0	98.0*	-	-	106.0*		82.0	74.0	-	15.0	25.0	35.0	-	39.0
		34.0	38.0	61.0	83.0	99.0*	-	102.0*			78.0	-	13.0	23.0	32.0	-	33.0
		38.0	32.0	52.0	72.0	92.0	-	98.0*			34.0	33.0	39.0	-	-	-	39.0
		42.0	28.0	45.0	63.0	81.0	-	94.0*			38.0	28.0	39.0	-	-	-	39.0
		24.0	63.0	96.0*	97.0*	-	-	97.0*		24 m (1)	42.0	23.0	39.0	39.0	-	-	39.0
	48 m	26.0	56.0	86.0*	97.0*	-	-	97.0*			46.0	19.0	36.0	39.0	-	-	39.0
		28.0	50.0	78.0	95.0*	-	-	95.0*			50.0	16.0	31.0	38.0	-	-	38.0
		30.0	45.0	71.0	93.0*	-	-	93.0*			54.0	13.0	27.0	38.0	-	-	38.0
		34.0	37.0	60.0	82.0*	-	-	89.0*		30 m (1)	58.0	11.0	24.0	37.0	37.0	-	37.0
		38.0	31.0	51.0	71.0	86.0*	-	86.0*			62.0	-	21.0	33.0	37.0	-	37.0
	54 m	42.0	27.0	44.0	62.0	80.0*	-	83.0*			66.0	-	18.0	30.0	36.0	-	36.0
		46.0	23.0	39.0	55.0	71.0	-	80.0*			70.0	-	16.0	27.0	35.0	-	35.0
		24.0	63.0	84.0*	-	-	-	86.0*		72 m	74.0	-	14.0	24.0	34.0	-	34.0
		26.0	56.0	84.0*	-	-	-	86.0*			78.0	-	12.0	22.0	32.0	-	33.0
		28.0	50.0	78.0	84.0*	-	-	86.0*			82.0	-	11.0	20.0	29.0	-	30.0
		30.0	45.0	71.0	84.0*	-	-	86.0*			18.0	98.0*	136.0*	138.0*	-	-	-
		34.0	37.0	60.0	80.0*	-	-	83.0*		24 m (1)	20.0	84.0	123.0*	138.0*	-	-	-
		38.0	31.0	51.0	71.0	-	-	79.0			22.0	73.0	108.0*	134.0*	-	-	-
		42.0	27.0	44.0	62.0	74.0	-	77.0			24.0	65.0	96.0*	127.0*	130.0*	-	-
		46.0	23.0	39.0	55.0	71.0	-	74.0			26.0	58.0	86.0	114.0*	126.0*	-	-
		50.0	19.0	34.0	49.0	63.0	-	72.0			28.0	52.0	78.0	104.0*	122.0*	-	-
		54.0	17.0	31.0	44.0	57.0	-	67.0			30.0	47.0	71.0	95.0*	118.0*	-	-
	54 m	26.0	54.0	74.0*	-	-	-	74.0*		30 m (1)	32.0	43.0	65.0	87.0	109.0*	-	-
		28.0	49.0	74.0*	-	-	-	74.0*			20.0	82.0	108.0*	-	-	-	-
		30.0	44.0	70.0*	74.0*	-	-	74.0*			22.0	72.0	106.0*	108.0*	-	-	-
		34.0	36.0	58.0	74.0*	-	-	74.0*			24.0	63.0	94.0*	108.0*	-	-	-
		38.0	30.0	50.0	69.0*	-	-	71.0*			26.0	56.0	84.0	107.0*	-	-	-
		42.0	25.0	43.0	61.0	69.0*	-	69.0*			28.0	50.0	76.0	102.0*	104.0*	-	-
	54 m	46.0	21.0	38.0	53.0	67.0*	-	67.0*			30.0	45.0	69.0	93.0	101.0*	-	-
		50.0	18.0	33.0	48.0	62.0	-	64.0			34.0	38.0	58.0	79.0	96.0*	-	-
		54.0	15.0	29.0	43.0	56.0	-	61.0			38.0	32.0	50.0	68.0	87.0	-	-
		58.0	13.0	26.0	39.0	51.0	-	59.0									

* Double hook block required

(1) Short luffing jibs – superlift at 13 m – Min weight of hook block : 5.5 t




TEREX CC 2600 H



Lifting capacities
Capacités

500 TON

Tragfähigkeiten
Capacités



HSWSL-85°



Main Boom	Fly Jib	m	0t	50t	100t	150t	200t	250t carrier	Main Boom	Fly Jib	m	0t	50t	100t	150t	200t	250t carrier	
			t	t	t	t	t	t				t	t	t	t	t	t	
72 m	36 m (1)	22.0	72.0	93.0*	-	-	-	-	72 m	72 m	34.0	33.0	43.0	-	-	-	43.0	
		24.0	63.0	93.0*	93.0*	-	-	-			38.0	28.0	43.0	-	-	-	43.0	
		26.0	56.0	84.0*	93.0*	-	-	-			42.0	23.0	41.0	42.0	-	-	42.0	
		28.0	50.0	76.0	92.0*	-	-	-			46.0	19.0	36.0	42.0	-	-	42.0	
		30.0	46.0	69.0	91.0*	-	-	-			50.0	16.0	31.0	41.0	-	-	41.0	
		34.0	38.0	58.0	79.0*	86.0*	-	-			54.0	13.0	27.0	41.0	-	-	41.0	
		38.0	32.0	50.0	68.0	81.0*	-	-			58.0	11.0	24.0	37.0	40.0	-	40.0	
		42.0	27.0	44.0	60.0	76.0	-	-			62.0	-	21.0	33.0	39.0	-	39.0	
	42 m (1)	24.0	62.0	81.0*	-	-	-	-			66.0	-	19.0	30.0	38.0	-	38.0	
		26.0	55.0	81.0*	81.0*	-	-	-			70.0	-	16.0	27.0	37.0	-	37.0	
		28.0	49.0	75.0	81.0*	-	-	-			74.0	-	15.0	25.0	35.0	-	36.0	
		30.0	44.0	68.0	81.0*	-	-	-			78.0	-	13.0	23.0	32.0	-	33.0	
		34.0	36.0	57.0	78.0	-	-	-		72 m	34.0	32.0	38.0	-	-	-	38.0	
		38.0	31.0	49.0	67.0	75.0	-	-			38.0	26.0	38.0	-	-	-	38.0	
		42.0	26.0	42.0	59.0	71.0	-	-			42.0	22.0	38.0	38.0	-	-	38.0	
		46.0	22.0	37.0	52.0	67.0	-	-			46.0	18.0	35.0	37.0	-	-	37.0	
	48.0	20.0	35.0	49.0	63.0	-	-	50.0			15.0	30.0	37.0	-	-	37.0		
	48 m	26.0	54.0	76.0*	-	-	-	-			54.0	12.0	26.0	36.0	-	-	36.0	
		28.0	49.0	76.0*	-	-	-	-			58.0	10.0	23.0	35.0	-	-	35.0	
		30.0	44.0	70.0*	76.0*	-	-	-			62.0	-	20.0	32.0	34.0	-	34.0	
		34.0	36.0	59.0	72.0*	-	-	-			66.0	-	18.0	29.0	33.0	-	33.0	
		38.0	30.0	50.0	70.0*	-	-	-			70.0	-	16.0	26.0	32.0	-	32.0	
		42.0	26.0	43.0	61.0	68.0	-	-			74.0	-	14.0	24.0	31.0	-	31.0	
		46.0	22.0	38.0	54.0	66.0	-	-			78.0	-	12.0	22.0	30.0	-	30.0	
		50.0	19.0	34.0	48.0	63.0	-	-			82.0	-	10.0	20.0	29.0	-	29.0	
	54 m	28.0	47.0	65.0	-	-	-	65.0	72 m	24 m (1)	18.0	96.0*	113.0*	-	-	-	-	
		30.0	43.0	65.0	-	-	-	65.0			20.0	82.0	113.0*	113.0*	-	-	-	
		34.0	35.0	57.0	65.0	-	-	65.0			22.0	72.0	106.0*	113.0*	-	-	-	
		38.0	29.0	49.0	53.0	-	-	63.0			24.0	63.0	94.0*	110.0*	-	-	-	
		42.0	24.0	42.0	60.0	-	-	62.0			26.0	56.0	84.0	107.0*	-	-	-	
		46.0	20.0	37.0	53.0	60.0	-	60.0			28.0	51.0	76.0	102.0*	105.0*	-	-	
		50.0	17.0	32.0	47.0	59.0	-	59.0			30.0	46.0	70.0	93.0*	102.0*	-	-	
		54.0	14.0	29.0	42.0	55.0	-	57.0			32.0	42.0	64.0	86.0	100.0	-	-	
	60 m	28.0	47.0	65.0	-	-	-	65.0		30 m (1)	20.0	80.0*	94.0*	-	-	-	-	
		30.0	43.0	58.0	-	-	-	58.0			22.0	70.0	94.0*	94.0*	-	-	-	
		34.0	35.0	57.0	58.0	-	-	58.0			24.0	62.0	93.0*	94.0*	-	-	-	
		38.0	29.0	49.0	57.0	-	-	57.0			26.0	55.0	83.0*	94.0*	-	-	-	
		42.0	24.0	42.0	56.0	-	-	56.0			28.0	49.0	75.0	91.0*	-	-	-	
		46.0	21.0	37.0	53.0	-	-	55.0			30.0	44.0	68.0	88.0*	-	-	-	
		50.0	17.0	32.0	47.0	54.0	-	54.0			34.0	37.0	57.0	78.0	83.0*	-	-	
		54.0	14.0	29.0	42.0	53.0	-	53.0			38.0	31.0	49.0	67.0	79.0*	-	-	
	66 m	28.0	47.0	65.0	-	-	-	65.0	78 m	36 m (1)	22.0	70.0	83.0*	-	-	-	-	
		30.0	43.0	65.0	-	-	-	65.0			24.0	62.0	83.0*	-	-	-	-	
		34.0	35.0	57.0	58.0	-	-	58.0			26.0	55.0	83.0*	83.0*	-	-	-	
		38.0	29.0	49.0	57.0	-	-	57.0			28.0	49.0	75.0	83.0*	-	-	-	
		42.0	24.0	42.0	56.0	-	-	56.0			30.0	44.0	68.0	81.0*	-	-	-	
		46.0	21.0	37.0	53.0	-	-	55.0			34.0	37.0	57.0	77.0	-	-	-	
		50.0	17.0	32.0	47.0	54.0	-	54.0			38.0	31.0	49.0	67.0	74.0	-	-	
		54.0	14.0	29.0	42.0	53.0	-	53.0			42.0	26.0	43.0	59.0	77.0	-	-	
	72 m	28.0	47.0	65.0	-	-	-	65.0		42 m (1)	24.0	59.0	72.0	-	-	-	-	
		30.0	43.0	65.0	-	-	-	65.0			26.0	53.0	72.0	-	-	-	-	
		34.0	35.0	57.0	58.0	-	-	58.0			28.0	47.0	72.0	68.0*	-	-	-	
		38.0	29.0	49.0	57.0	-	-	57.0			30.0	43.0	67.0	66.0	-	-	-	
		42.0	24.0	42.0	56.0	-	-	56.0			34.0	35.0	56.0	64.0	-	-	-	
		46.0	21.0	37.0	53.0	-	-	55.0			38.0	29.0	48.0	60.0	-	-	-	
		50.0	17.0	32.0	47.0	54.0	-	54.0			42.0	25.0	41.0	53.0	60.0	-	-	
		54.0	14.0	29.0	42.0	53.0	-	53.0			46.0	21.0	36.0	47.0	58.0	-	-	
	78 m	28.0	47.0	65.0	-	-	-	65.0		48 m	50.0	18.0	32.0	43.0	56.0	-	-	-
		30.0	43.0	65.0	-	-	-	65.0			26.0	53.0	72.0	-	-	-	68.0*	
		34.0	35.0	57.0	58.0	-	-	58.0			28.0	48.0	68.0*	-	-	-	68.0*	
		38.0	29.0	49.0	57.0	-	-	57.0			30.0	43.0	68.0*	68.0*	-	-	68.0*	
		42.0	24.0	42.0	56.0	-	-	56.0			34.0	35.0	58.0	66.0	-	-	66.0	
		46.0	21.0	37.0	53.0	-	-	55.0			38.0	29.0	49.0	64.0	-	-	64.0	
		50.0	17.0	32.0	47.0	54.0	-	54.0			42.0	25.0	43.0	60.0	-	-	62.0	
		54.0	14.0	29.0	42.0	53.0	-	53.0			46.0	21.0	37.0	53.0	60.0	-	60.0	
	84 m	28.0	47.0	65.0	-	-	-	65.0			50.0	18.0	33.0	47.0	58.0	-	58.0	
		30.0	43.0	65.0	-	-	-	65.0			54.0	15.0	29.0	43.0	56.0	-	56.0	
		34.0	35.0	57.0	58.0	-	-	58.0										
		38.0	29.0	49.0	57.0	-	-	57.0										
		42.0	24.0	42.0	56.0	-	-	56.0										
		46.0	21.0	37.0	53.0	-	-	55.0										
		50.0	17.0	32.0	47.0	54.0	-	54.0										
		54.0	14.0	29.0	42.0	53.0	-	53.0										

* Double hook block required

(1) Short luffing jibs – superlift at 13 m –Min weight of hook block : 5.5 t




TEREX CC 2600 H


Lifting capacities
Capacités

500 TON

Tragfähigkeiten
Capacités



HSWSL-85°



Main Boom	Fly Jib	m	0t	50t	100t	150t	200t	250t carrier	Main Boom	Fly Jib	m	0t	50t	100t	150t	200t	250t carrier
			t	t	t	t	t	t				t	t	t	t	t	t
78 m	54 m	28.0	46.0	59.0	-	-	-	59.0	78 m	72 m	34.0	31.0	38.0	-	-	-	38.0
		30.0	41.0	59.0	-	-	-	59.0			38.0	26.0	38.0	-	-	-	38.0
		34.0	34.0	56.0	59.0	-	-	59.0			42.0	22.0	37.0	37.0	-	-	37.0
		38.0	28.0	48.0	57.0	-	-	57.0			46.0	18.0	35.0	36.0	-	-	36.0
		42.0	23.0	41.0	55.0	-	-	55.0			50.0	15.0	30.0	35.0	-	-	35.0
		46.0	19.0	36.0	52.0	-	-	53.0			54.0	12.0	27.0	34.0	-	-	34.0
		50.0	16.0	32.0	46.0	52.0	-	52.0			58.0	10.0	23.0	33.0	-	-	33.0
		54.0	14.0	28.0	41.0	50.0	-	50.0			62.0	-	20.0	32.0	-	-	32.0
	60 m	58.0	11.0	25.0	37.0	48.0	-	48.0		78 m	66.0	-	18.0	29.0	31.0	-	31.0
		30.0	42.0	52.0	-	-	-	52.0			70.0	-	16.0	27.0	31.0	-	31.0
		34.0	34.0	52.0	-	-	-	52.0			74.0	-	14.0	24.0	30.0	-	30.0
		38.0	28.0	48.0	51.0	-	-	51.0			78.0	-	12.0	22.0	29.0	-	29.0
		42.0	23.0	41.0	49.0	-	-	49.0			38.0	25.0	32.0	-	-	-	32.0
		46.0	19.0	36.0	47.0	-	-	47.0			42.0	20.0	32.0	-	-	-	32.0
		50.0	16.0	32.0	46.0	-	-	46.0			46.0	17.0	31.0	31.0	-	-	31.0
		54.0	14.0	28.0	41.0	44.0	-	44.0			50.0	14.0	30.0	31.0	-	-	31.0
78 m	66 m	58.0	11.0	25.0	37.0	43.0	-	43.0			54.0	11.0	26.0	30.0	-	-	30.0
		62.0	10.0	22.0	34.0	41.0	-	41.0			58.0	-	22.0	30.0	-	-	30.0
		66.0	-	20.0	31.0	40.0	-	40.0			62.0	-	20.0	29.0	-	-	29.0
		34.0	32.0	44.0	-	-	-	44.0			66.0	-	17.0	28.0	28.0	-	28.0
		38.0	27.0	44.0	44.0	-	-	44.0			70.0	-	15.0	26.0	28.0	-	28.0
		42.0	22.0	41.0	43.0	-	-	43.0			74.0	-	13.0	23.0	27.0	-	27.0
		46.0	18.0	35.0	41.0	-	-	41.0			78.0	-	11.0	21.0	26.0	-	26.0
		50.0	15.0	31.0	40.0	-	-	40.0			82.0	-	10.0	19.0	25.0	-	25.0
	66 m	54.0	13.0	27.0	39.0	-	-	39.0									
		58.0	10.0	24.0	36.0	38.0	-	38.0									
		62.0	-	21.0	33.0	37.0	-	37.0									
		66.0	-	18.0	30.0	36.0	-	36.0									
		70.0	-	16.0	27.0	35.0	-	35.0									

* Double hook block required

(1) Short luffing jibs – superlift at 13 m – Min weight of hook block : 5.5 t




TEREX CC 2600 H

Working ranges
Portées

500 TON

Arbeitsbereiche
Werkbereich

HSWSL

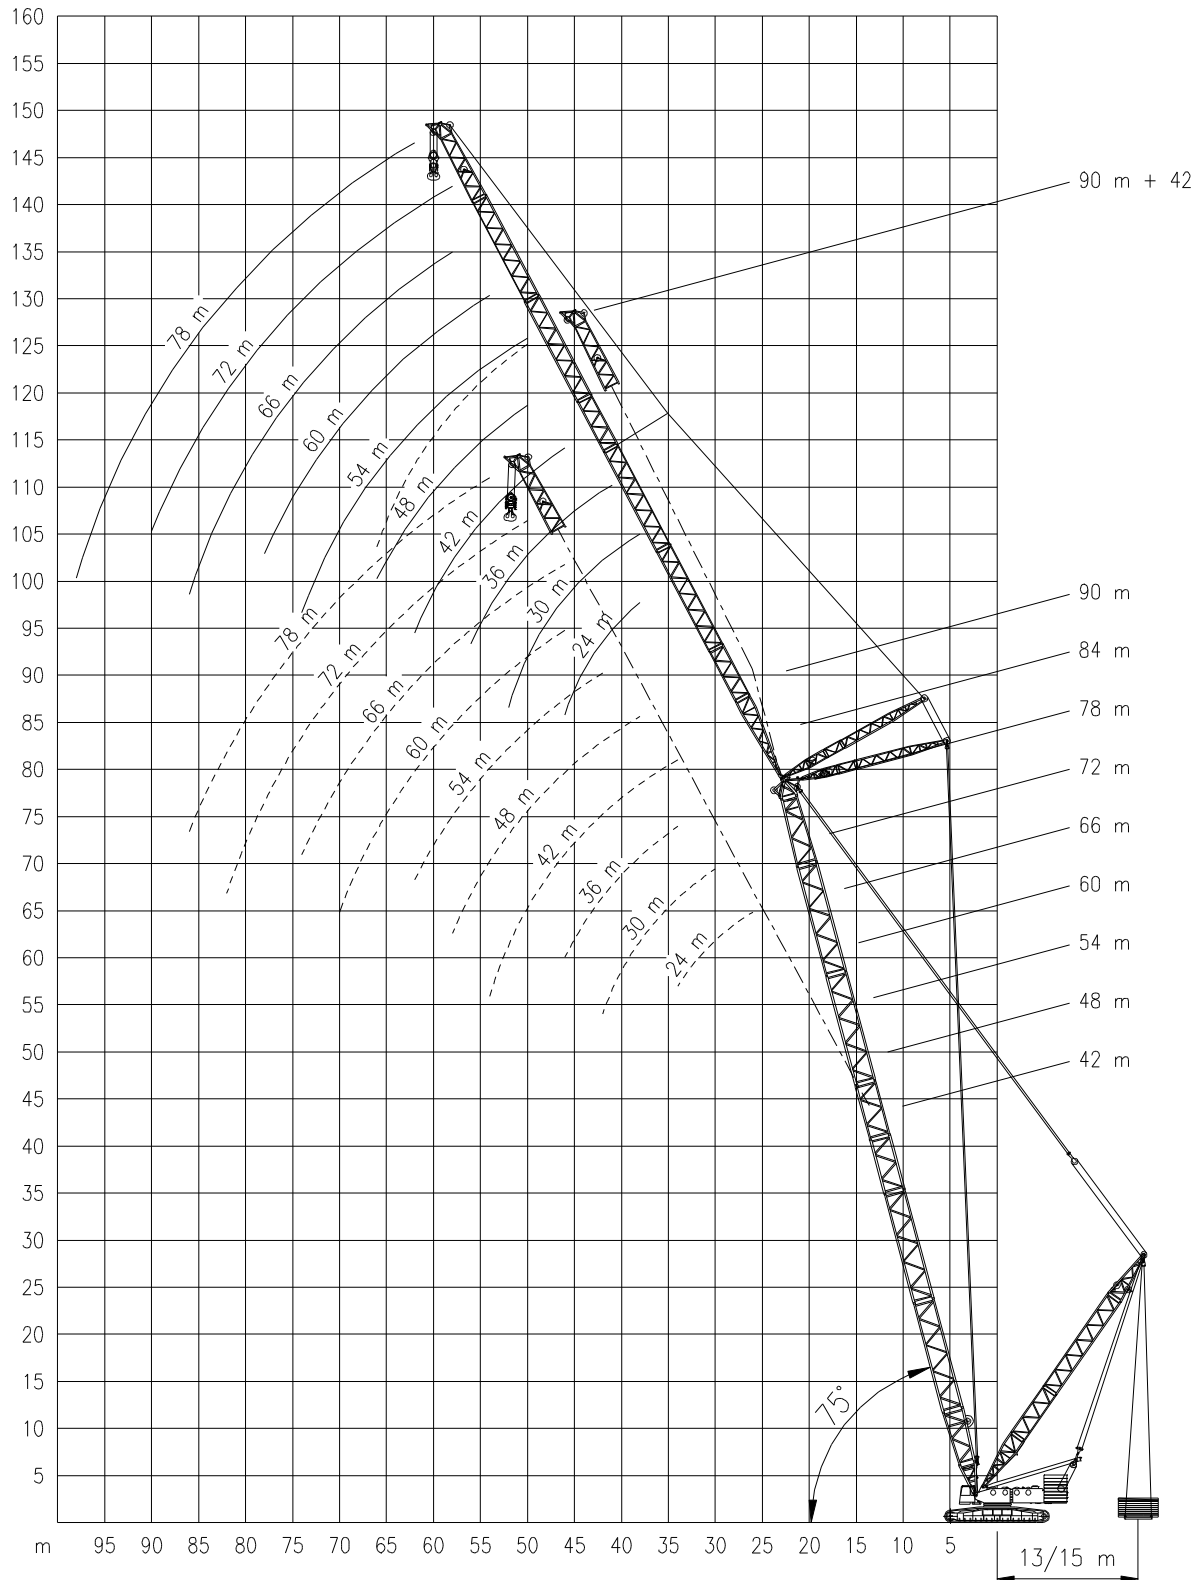




TEREX CC 2600 H


Lifting capacities
Capacités

500 TON

Tragfähigkeiten
Capacités



HSWSL-75°



Main Boom	Fly Jib	m	0t	50t	100t	150t	200t	250t	250t carrier
			t	t	t	t	t	t	t
42 m	24 m	26.0	54.0	84.0	115.0	143.0	176.0*	-	191.0*
		28.0	48.0	76.0	104.0	132.0	160.0*	188.0*	188.0*
		30.0	44.0	70.0	95.0	121.0	147.0*	173.0*	173.0*
		34.0	36.0	59.0	81.0	104.0	126.0	148.0*	148.0*
	30 m	30.0	42.0	68.0	94.0	120.0	145.0*	-	159.0*
		34.0	35.0	57.0	80.0	102.0	125.0	-	147.0*
		38.0	29.0	49.0	69.0	89.0	109.0	-	128.0
		42.0	25.0	43.0	61.0	78.0	96.0	-	114.0
	36 m	34.0	35.0	57.0	79.0	102.0	124.0*	-	147.0*
		38.0	29.0	49.0	69.0	88.0	108.0	-	128.0*
		42.0	25.0	43.0	60.0	78.0	96.0	-	113.0
		46.0	21.0	37.0	53.0	69.0	85.0	-	101.0
	42 m	34.0	33.0	56.0	78.0	100.0	123.0*	-	140.0*
		38.0	28.0	48.0	67.0	87.0	107.0*	-	127.0*
		42.0	23.0	41.0	59.0	77.0	94.0	-	112.0*
		46.0	20.0	36.0	52.0	68.0	84.0	-	100.0
	48 m	50.0	17.0	32.0	47.0	61.0	76.0	-	90.0
		54.0	14.0	29.0	42.0	56.0	69.0	-	80.0
		38.0	27.0	47.0	67.0	87.0	106.0*	-	126.0*
		42.0	23.0	41.0	58.0	76.0	94.0	-	112.0*
	54 m	46.0	19.0	36.0	52.0	68.0	84.0	-	100.0
		50.0	16.0	32.0	46.0	61.0	75.0	-	90.0
		54.0	14.0	28.0	42.0	55.0	68.0	-	82.0
		58.0	12.0	25.0	38.0	50.0	62.0	-	75.0
	60 m	42.0	21.0	39.0	57.0	75.0	92.0	-	101.0*
		46.0	17.0	34.0	50.0	66.0	82.0	-	98.0*
		50.0	15.0	30.0	45.0	59.0	74.0	-	89.0
		54.0	12.0	26.0	40.0	54.0	67.0	-	80.0
	66 m	58.0	10.0	23.0	36.0	49.0	61.0	-	74.0
		62.0	-	21.0	33.0	44.0	56.0	-	67.0
		66.0	-	19.0	30.0	41.0	52.0	-	57.0
		70.0	-	17.0	27.0	38.0	48.0	-	53.0
	72 m	46.0	16.0	33.0	49.0	65.0	74.0	-	74.0
		50.0	13.0	29.0	44.0	58.0	73.0	-	74.0
		54.0	11.0	25.0	39.0	52.0	66.0	-	72.0
		58.0	-	22.0	35.0	47.0	60.0	-	70.0
	78 m	62.0	-	19.0	32.0	43.0	55.0	-	65.0
		66.0	-	17.0	29.0	40.0	50.0	-	59.0
		70.0	-	15.0	26.0	36.0	46.0	-	55.0
		74.0	-	13.0	23.0	33.0	43.0	-	48.0

Main Boom	Fly Jib	m	0t	50t	100t	150t	200t	250t	250t carrier
			t	t	t	t	t	t	t
48 m	30 m	30.0	40.0	65.0	91.0	117.0	143.0*	-	160.0*
		34.0	33.0	55.0	78.0	100.0	122.0*	145.0*	145.0*
		38.0	27.0	47.0	67.0	87.0	107.0	126.0*	126.0*
		42.0	23.0	41.0	59.0	77.0	94.0	112.0	112.0
	36 m	34.0	32.0	55.0	77.0	100.0	122.0*	-	138.0*
		38.0	27.0	47.0	67.0	86.0	106.0*	-	126.0*
		42.0	23.0	41.0	58.0	76.0	94.0	-	112.0*
		46.0	19.0	36.0	52.0	68.0	84.0	-	100.0
	42 m	50.0	17.0	32.0	46.0	61.0	76.0	-	90.0
		38.0	25.0	46.0	65.0	85.0	105.0	125.0*	125.0*
		42.0	21.0	39.0	57.0	75.0	92.0	110.0*	110.0*
		46.0	18.0	35.0	51.0	67.0	83.0	99.0	99.0
	48 m	50.0	15.0	30.0	45.0	60.0	74.0	89.0	89.0
		54.0	13.0	27.0	41.0	54.0	67.0	81.0	81.0
		42.0	21.0	39.0	57.0	74.0	92.0	110.0*	110.0*
		46.0	17.0	34.0	50.0	66.0	82.0	98.0*	98.0*
	54 m	50.0	14.0	30.0	45.0	59.0	74.0	88.0	88.0
		54.0	12.0	26.0	40.0	54.0	67.0	80.0	80.0
		58.0	10.0	23.0	36.0	49.0	61.0	74.0	74.0
		62.0	-	22.0	35.0	47.0	60.0	72.0	72.0
	60 m	66.0	-	17.0	29.0	40.0	50.0	61.0	61.0
		46.0	16.0	32.0	49.0	65.0	80.0*	-	80.0*
		50.0	13.0	28.0	43.0	58.0	72.0	-	80.0*
		54.0	10.0	25.0	39.0	52.0	66.0	-	75.0
	66 m	58.0	-	22.0	35.0	47.0	60.0	70.0	70.0
		62.0	-	19.0	32.0	43.0	55.0	65.0	65.0
		66.0	-	17.0	29.0	40.0	50.0	59.0	59.0
		70.0	-	15.0	26.0	36.0	47.0	54.0	54.0
	72 m	50.0	-	27.0	42.0	57.0	70.0	-	70.0
		54.0	-	23.0	37.0	51.0	64.0	-	70.0
		58.0	-	20.0	34.0	46.0	58.0	68.0	68.0
		62.0	-	18.0	30.0	42.0	53.0	65.0	65.0
	78 m	66.0	-	16.0	27.0	38.0	49.0	60.0	60.0
		70.0	-	14.0	25.0	35.0	45.0	55.0	55.0
		74.0	-	12.0	22.0	32.0	42.0	50.0	50.0
		78.0	-	11.0	20.0	30.0	39.0	-	43.0

* Double hook block required
(1) Short luffing jibs – superlift at 13 m –Min weight of hook block : 5.5 t




TEREX CC 2600 H


Lifting capacities
Capacités

500 TON

Tragfähigkeiten
Capacités



HSWSL-75°



Main Boom	Fly Jib	m	0t	50t	100t	150t	200t	250t	250t carrier
			t	t	t	t	t	t	t
54 m	24 m (1)	30.0	40.0	66.0	91.0	-	-	-	-
		34.0	33.0	56.0	79.0	90.0	-	-	-
		38.0	27.0	48.0	69.0	83.0	-	-	-
	30 m (1)	40.0	25.0	45.0	64.0	80.0	-	-	-
		34.0	31.0	54.0	77.0	83.0	-	-	-
		38.0	25.0	46.0	67.0	79.0	-	-	-
	36 m	42.0	21.0	40.0	59.0	74.0	-	-	-
		44.0	20.0	38.0	55.0	72.0	-	-	-
		38.0	24.0	45.0	64.0	84.0	104.0	124.0*	124.0*
	42 m	42.0	20.0	39.0	56.0	74.0	92.0	109.0*	109.0*
		46.0	17.0	34.0	50.0	66.0	82.0	98.0	98.0
		50.0	15.0	30.0	45.0	59.0	74.0	89.0	89.0
	48 m	38.0	23.0	43.0	63.0	83.0	103.0*	-	119.0*
		42.0	19.0	37.0	55.0	73.0	90.0	108.0*	108.0*
		46.0	16.0	32.0	49.0	65.0	81.0	97.0*	97.0*
		50.0	13.0	29.0	43.0	58.0	73.0	87.0	87.0
	54 m	54.0	11.0	25.0	39.0	52.0	66.0	79.0	79.0
		42.0	18.0	37.0	55.0	72.0	90.0	-	104.0*
		46.0	15.0	32.0	48.0	64.0	80.0	96.0*	96.0*
		50.0	12.0	28.0	43.0	58.0	72.0	87.0	87.0
	60 m	54.0	10.0	25.0	38.0	52.0	65.0	79.0	79.0
		58.0	-	22.0	35.0	47.0	60.0	72.0	72.0
		62.0	-	19.0	32.0	43.0	55.0	66.0	66.0
		46.0	-	30.0	47.0	63.0	79.0	-	89.0*
	66 m	50.0	-	26.0	42.0	56.0	71.0	85.0*	85.0*
		54.0	-	23.0	37.0	51.0	64.0	77.0	77.0
		58.0	-	20.0	33.0	46.0	58.0	71.0	71.0
		62.0	-	18.0	30.0	42.0	53.0	65.0	65.0
	72 m	66.0	-	16.0	27.0	38.0	49.0	60.0	60.0
		70.0	-	14.0	25.0	35.0	45.0	56.0	56.0
		74.0	-	12.0	22.0	32.0	42.0	51.0	51.0
		50.0	-	25.0	40.0	55.0	68.0*	-	68.0*
	78 m	54.0	-	22.0	36.0	49.0	63.0	-	68.0*
		58.0	-	19.0	32.0	45.0	57.0	67.0*	67.0*
		62.0	-	16.0	29.0	40.0	52.0	64.0	64.0
		66.0	-	14.0	26.0	37.0	48.0	59.0	59.0
	84 m	70.0	-	12.0	23.0	34.0	44.0	54.0	54.0
		74.0	-	11.0	21.0	31.0	41.0	50.0	50.0
		78.0	-	-	19.0	29.0	38.0	46.0	46.0
		82.0	-	-	16.0	26.0	35.0	43.0	43.0
	90 m	86.0	-	-	15.0	24.0	32.0	37.0	37.0
		90.0	-	-	14.0	22.0	31.0	39.0	39.0
		94.0	-	-	13.0	20.0	29.0	36.0	36.0
		98.0	-	-	12.0	18.0	27.0	34.0	34.0

Main Boom	Fly Jib	m	0t	50t	100t	150t	200t	250t	250t carrier
			t	t	t	t	t	t	t
60 m	24 m (1)	34.0	30.0	54.0	77.0	88.0	-	-	-
		38.0	25.0	46.0	66.0	83.0	-	-	-
		40.0	23.0	43.0	62.0	80.0	-	-	-
	30 m (1)	34.0	28.0	52.0	75.0	81.0	-	-	-
		38.0	23.0	44.0	65.0	81.0	-	-	-
		42.0	19.0	38.0	56.0	75.0	-	-	-
	36 m	46.0	16.0	33.0	50.0	67.0	-	-	-
		38.0	22.0	42.0	62.0	82.0	102.0*	120.0*	120.0*
		42.0	18.0	37.0	54.0	72.0	90.0	107.0*	107.0*
	42 m	46.0	15.0	32.0	48.0	64.0	80.0	96.0*	96.0*
		50.0	12.0	28.0	43.0	58.0	72.0	87.0	87.0
		42.0	16.0	35.0	53.0	71.0	88.0	105.0*	105.0*
	48 m	46.0	13.0	30.0	47.0	63.0	79.0	95.0*	95.0*
		50.0	11.0	26.0	42.0	56.0	71.0	85.0	85.0
		54.0	-	23.0	37.0	51.0	64.0	78.0	78.0
		58.0	-	21.0	34.0	46.0	59.0	71.0	71.0
	54 m	42.0	16.0	35.0	53.0	70.0	88.0*	-	95.0*
		46.0	13.0	30.0	46.0	62.0	78.0	94.0*	94.0*
		50.0	10.0	26.0	41.0	56.0	71.0	85.0*	85.0*
		54.0	-	23.0	37.0	50.0	64.0	77.0	77.0
	60 m	58.0	-	20.0	33.0	46.0	58.0	71.0	71.0
		62.0	-	18.0	30.0	42.0	53.0	65.0	65.0
		46.0	-	28.0	45.0	61.0	77.0	-	82.0*
		50.0	-	24.0	40.0	54.0	69.0	82.0*	82.0*
	66 m	54.0	-	21.0	35.0	49.0	62.0	76.0	76.0
		58.0	-	18.0	32.0	44.0	57.0	69.0	69.0
		62.0	-	16.0	28.0	40.0	52.0	63.0	63.0
		66.0	-	14.0	25.0	37.0	48.0	59.0	59.0
	72 m	70.0	-	12.0	23.0	34.0	44.0	54.0	54.0
		74.0	-	11.0	21.0	31.0	41.0	51.0	51.0
		50.0	-	23.0	38.0	53.0	62.0	-	62.0
		54.0	-	20.0	34.0	48.0	61.0	-	62.0
	78 m	58.0	-	17.0	30.0	43.0	55.0	-	62.0
		62.0	-	15.0	27.0	39.0	51.0	61.0	61.0
		66.0	-	12.0	24.0	36.0	46.0	57.0	57.0
		70.0	-	11.0	22.0	32.0	43.0	53.0	53.0
	84 m	74.0	-	-	19.0	30.0	40.0	49.0	49.0
		78.0	-	-	18.0	27.0	37.0	46.0	46.0
		82.0	-	-	16.0	25.0	34.0	41.0	41.0
		86.0	-	-	14.0	22.0	31.0	39.0	39.0
	90 m	54.0	-	19.0	33.0	47.0	53.0	-	53.0
		58.0	-	16.0	30.0	43.0	50.0	-	53.0
		62.0	-	14.0	26.0	39.0	50.0	-	53.0
		66.0	-	12.0	24.0	35.0	46.0	53.0	53.0
	96 m	70.0	-	10.0	21.0	32.0	42.0	52.0	52.0
		74.0	-	-	19.0	29.0	39.0	49.0	49.0
		78.0	-	-	17.0	27.0	36.0	45.0	45.0
		82.0	-	-	15.0	24.0	34.0	42.0	42.0
	102 m	86.0	-	-	14.0	22.0	31.0	39.0	39.0
		90.0	-	-	12.0	20.0	29.0	36.0	36.0
		94.0	-	-	11.0	19.0	28.0	35.0	35.0
		98.0	-	-	10.0	18.0	27.0	34.0	34.0

* Double hook block required

(1) Short luffing jibs – superlift at 13 m – Min weight of hook block : 5.5 t




TEREX CC 2600 H


Lifting capacities
Capacités

500 TON

Tragfähigkeiten
Capacités



HSWSL-75°



Main Boom	Fly Jib	m	0t	50t	100t	150t	200t	250t	250t carrier
			t	t	t	t	t	t	t
66 m	24 m (1)	34.0	27.0	51.0	74.0	84.0	-	-	-
		38.0	22.0	43.0	64.0	83.0	-	-	-
		42.0	18.0	38.0	56.0	74.0	-	-	-
	30 m (1)	38.0	20.0	41.0	62.0	78.0	-	-	-
		42.0	16.0	36.0	54.0	72.0	-	-	-
		46.0	13.0	31.0	48.0	64.0	-	-	-
	36 m	48.0	12.0	29.0	45.0	61.0	-	-	-
		38.0	19.0	40.0	60.0	80.0	99.0*	-	111.0*
		42.0	15.0	34.0	52.0	70.0	88.0	105.0*	105.0*
	42 m	46.0	12.0	29.0	46.0	62.0	78.0	94.0*	94.0*
		50.0	10.0	26.0	41.0	56.0	70.0	85.0	85.0
		54.0	-	23.0	37.0	50.0	64.0	77.0	77.0
	48 m	42.0	-	32.0	51.0	68.0	86.0*	-	97.0*
		46.0	-	28.0	45.0	61.0	77.0	93.0*	93.0*
		50.0	-	24.0	40.0	54.0	69.0	83.0*	83.0*
	54 m	54.0	-	21.0	35.0	49.0	62.0	76.0	76.0
		58.0	-	18.0	32.0	44.0	57.0	69.0	69.0
		46.0	-	28.0	44.0	60.0	76.0	-	85.0*
	60 m	50.0	-	24.0	39.0	54.0	69.0	83.0*	83.0*
		54.0	-	21.0	35.0	49.0	62.0	75.0	75.0
		58.0	-	18.0	31.0	44.0	57.0	69.0	69.0
	66 m	62.0	-	16.0	28.0	40.0	52.0	63.0	63.0
		66.0	-	14.0	25.0	37.0	48.0	59.0	59.0
		70.0	-	12.0	22.0	34.0	45.0	56.0	56.0
	72 m	74.0	-	10.0	20.0	32.0	43.0	53.0	53.0
		78.0	-	8.0	18.0	28.0	38.0	48.0	48.0
		82.0	-	6.0	16.0	24.0	34.0	44.0	44.0
	78 m	86.0	-	4.0	14.0	20.0	30.0	40.0	40.0
		90.0	-	2.0	12.0	18.0	26.0	36.0	36.0
		94.0	-	0.0	10.0	16.0	24.0	34.0	34.0

Main Boom	Fly Jib	m	0t	50t	100t	150t	200t	250t	250t carrier
			t	t	t	t	t	t	t
72 m	24 m (1)	34.0	23.0	48.0	71.0	81.0	-	-	-
		38.0	19.0	41.0	61.0	81.0	-	-	-
		42.0	16.0	35.0	54.0	72.0	-	-	-
	30 m (1)	44.0	14.0	33.0	51.0	68.0	-	-	-
		38.0	17.0	39.0	60.0	75.0	-	-	-
		42.0	14.0	33.0	52.0	70.0	-	-	-
	36 m (1)	46.0	11.0	28.0	46.0	62.0	71.0	-	-
		50.0	9.0	25.0	41.0	56.0	67.0	-	-
		42.0	13.0	33.0	52.0	66.0	-	-	-
	42 m (1)	46.0	11.0	28.0	46.0	62.0	-	-	-
		50.0	8.0	24.0	41.0	56.0	63.0	-	-
		54.0	7.0	21.0	36.0	50.0	60.0	-	-
	48 m	56.0	6.0	20.0	34.0	48.0	58.0	-	-
		42.0	11.0	31.0	50.0	60.0	-	-	-
		46.0	9.0	26.0	44.0	60.0	-	-	-
	54 m	50.0	7.0	23.0	39.0	54.0	59.0	-	-
		54.0	5.0	20.0	34.0	49.0	57.0	-	-
		58.0	-	17.0	31.0	44.0	54.0	-	-
	60 m	62.0	-	15.0	28.0	40.0	52.0	-	-
		46.0	-	25.0	42.0	58.0	74.0*	-	75.0*
		50.0	-	22.0	37.0	52.0	67.0*	-	75.0*
	66 m	54.0	-	19.0	33.0	47.0	60.0	74.0*	74.0*
		58.0	-	16.0	29.0	42.0	55.0	67.0*	67.0*
		62.0	-	14.0	26.0	39.0	50.0	62.0	62.0
	72 m	66.0	-	12.0	24.0	35.0	46.0	57.0	57.0
		50.0	-	20.0	35.0	51.0	65.0	-	65.0
		54.0	-	17.0	31.0	45.0	59.0	-	65.0
	78 m	58.0	-	14.0	28.0	41.0	53.0	64.0	64.0
		62.0	-	12.0	25.0	37.0	49.0	60.0	60.0
		66.0	-	10.0	22.0	34.0	45.0	56.0	56.0
	84 m	70.0	-	8.0	20.0	32.0	43.0	53.0	53.0
		74.0	-	6.0	18.0	28.0	38.0	48.0	48.0
		78.0	-	4.0	16.0	24.0	34.0	44.0	44.0
	90 m	82.0	-	2.0	14.0	20.0	30.0	40.0	40.0
		86.0	-	0.0	12.0	18.0	26.0	36.0	36.0
		90.0	-	0.0	10.0	16.0	24.0	34.0	34.0

* Double hook block required

(1) Short luffing jibs – superlift at 13 m – Min weight of hook block : 5.5 t




TEREX CC 2600 H



Lifting capacities
Capacités

500 TON

Tragfähigkeiten
Capacités



HSWSL-75°



Main Boom	Fly Jib	m	0t	50t	100t	150t	200t	250t	250t carrier
			t	t	t	t	t	t	t
78 m	24 m (1)	38.0	16.0	38.0	59.0	77.0	-	-	-
		42.0	13.0	32.0	51.0	69.0	77.0	-	-
		46.0	10.0	28.0	45.0	62.0	73.0	-	-
	30 m (1)	38.0	14.0	35.0	57.0	72.0	-	-	-
		42.0	11.0	30.0	49.0	68.0	-	-	-
		46.0	8.0	26.0	43.0	60.0	69.0	-	-
		50.0	6.0	22.0	38.0	54.0	66.0	-	-
	36 m (1)	52.0	6.0	21.0	36.0	51.0	64.0	-	-
		42.0	10.0	30.0	49.0	64.0	-	-	-
		46.0	8.0	25.0	43.0	60.0	-	-	-
		50.0	6.0	22.0	38.0	53.0	61.0	-	-
	42 m (1)	54.0	-	19.0	34.0	48.0	59.0	-	-
		56.0	-	18.0	32.0	46.0	58.0	-	-
		46.0	6.0	24.0	41.0	58.0	-	-	-
		50.0	-	20.0	36.0	52.0	58.0	-	-
	48 m	54.0	-	17.0	32.0	47.0	56.0	-	-
		58.0	-	15.0	29.0	42.0	54.0	-	-
		62.0	-	13.0	26.0	38.0	51.0	-	-
		50.0	-	19.0	35.0	50.0	61.0	-	61.0
	54 m	54.0	-	16.0	31.0	45.0	58.0	-	61.0
		58.0	-	14.0	27.0	41.0	53.0	-	60.0
		62.0	-	12.0	24.0	37.0	49.0	-	57.0
		66.0	-	10.0	22.0	33.0	45.0	-	53.0
	60 m	50.0	-	17.0	33.0	48.0	54.0	-	54.0
		54.0	-	15.0	29.0	43.0	54.0	-	54.0
		58.0	-	12.0	25.0	39.0	52.0	-	54.0
		62.0	-	10.0	23.0	35.0	47.0	53.0	53.0
	66 m	66.0	-	-	20.0	32.0	43.0	51.0	51.0
		70.0	-	-	18.0	29.0	40.0	49.0	49.0
		74.0	-	-	16.0	26.0	37.0	46.0	46.0
		78.0	-	-	15.0	24.0	34.0	42.0	42.0
	72 m	54.0	-	15.0	29.0	43.0	48.0	-	48.0
		58.0	-	12.0	25.0	39.0	48.0	-	48.0
		62.0	-	10.0	23.0	35.0	47.0	-	47.0
		66.0	-	-	20.0	32.0	43.0	-	47.0
	78 m	70.0	-	-	18.0	29.0	40.0	45.0	45.0
		74.0	-	-	16.0	26.0	37.0	44.0	44.0
		78.0	-	-	15.0	24.0	34.0	42.0	42.0
		82.0	-	-	11.0	21.0	30.0	37.0	37.0
	84 m	86.0	-	-	10.0	19.0	28.0	36.0	36.0
		58.0	-	-	24.0	37.0	42.0	-	42.0
		62.0	-	-	21.0	34.0	42.0	-	42.0
		66.0	-	-	19.0	30.0	41.0	-	41.0
	90 m	70.0	-	-	17.0	27.0	38.0	-	40.0
		74.0	-	-	15.0	25.0	35.0	39.0	39.0
		78.0	-	-	13.0	23.0	32.0	38.0	38.0
		82.0	-	-	11.0	21.0	30.0	37.0	37.0
	96 m	86.0	-	-	10.0	19.0	28.0	36.0	36.0
		58.0	-	-	24.0	36.0	-	-	36.0
		62.0	-	-	21.0	33.0	36.0	-	36.0
		66.0	-	-	18.0	30.0	36.0	-	36.0
	102 m	70.0	-	-	16.0	27.0	35.0	-	35.0
		74.0	-	-	14.0	24.0	35.0	-	35.0
		78.0	-	-	12.0	22.0	32.0	-	34.0
		82.0	-	-	11.0	20.0	29.0	33.0	33.0
	108 m	86.0	-	-	10.0	18.0	27.0	32.0	32.0
		90.0	-	-	-	17.0	25.0	31.0	31.0
		62.0	-	-	20.0	30.0	-	-	30.0
		66.0	-	-	17.0	29.0	30.0	-	30.0
	114 m	70.0	-	-	15.0	26.0	30.0	-	30.0
		74.0	-	-	13.0	23.0	29.0	-	29.0
		78.0	-	-	11.0	21.0	29.0	-	29.0
		82.0	-	-	10.0	19.0	28.0	-	29.0
	120 m	86.0	-	-	-	17.0	26.0	28.0	28.0
		90.0	-	-	-	16.0	24.0	28.0	28.0
		94.0	-	-	-	14.0	22.0	27.0	27.0
		98.0	-	-	-	13.0	20.0	26.0	26.0

Main Boom	Fly Jib	m	0t	50t	100t	150t	200t	250t	250t carrier
			t	t	t	t	t	t	t
84 m	24 m (1)	38.0	13.0	35.0	56.0	76.0	-	-	-
		42.0	10.0	30.0	49.0	67.0	76.0	-	-
		46.0	8.0	25.0	43.0	60.0	71.0	-	-
	30 m (1)	42.0	8.0	27.0	47.0	65.0	-	-	-
		46.0	6.0	23.0	41.0	58.0	66.0	-	-
		50.0	-	20.0	36.0	52.0	65.0	-	-
		52.0	-	19.0	34.0	49.0	63.0	-	-
	36 m (1)	46.0	-	23.0	41.0	58.0	62.0	-	-
		50.0	-	20.0	36.0	52.0	62.0	-	-
		54.0	-	17.0	32.0	46.0	57.0	-	-
		58.0	-	15.0	28.0	42.0	54.0	-	-
	42 m (1)	46.0	-	21.0	39.0	54.0	-	-	-
		50.0	-	18.0	34.0	50.0	54.0	-	-
		54.0	-	15.0	30.0	45.0	53.0	-	-
		58.0	-	13.0	27.0	40.0	50.0	-	-
	48 m	62.0	-	11.0	24.0	36.0	47.0	-	-
		64.0	-	10.0	23.0	35.0	45.0	-	-
	54 m	38.0	9.0	31.0	53.0	71.0	-	-	-
		42.0	7.0	26.0	46.0	64.0	71.0	-	-
		46.0	5.0	22.0	40.0	57.0	70.0	-	-
		48.0	-	21.0	38.0	54.0	68.0	-	-
90 m	24 m (1)	42.0	-	24.0	43.0	62.0	-	-	-
		46.0	-	20.0	38.0	55.0	63.0	-	-
		50.0	-	17.0	33.0	49.0	60.0	-	-
		54.0	-	15.0	29.0	44.0	56.0	-	-
	30 m (1)	46.0	-	20.0	38.0	52.0	-	-	-
		50.0	-	17.0	33.0	49.0	52.0	-	-
		54.0	-	14.0	29.0	44.0	49.0	-	-
		58.0	-	12.0	26.0	40.0	46.0	-	-
	36 m (1)	60.0	-	11.0	25.0	38.0	44.0	-	-
		50.0	-	15.0	31.0	45.0	-	-	-
		54.0	-	13.0	27.0	42.0	45.0	-	-
		58.0	-	10.0	24.0	38.0	44.0	-	-
	42 m (1)	62.0	-	9.0	21.0	34.0	41.0	-	-
		66.0	-	7.0	19.0	31.0	38.0	-	-

* Double hook block required

(1) Short luffing jibs – superlift at 13 m – Min weight of hook block : 5.5 t



TEREX CC 2600 H


500 TON

**Working speeds
Vitesses de travail**

**Arbeitsgeschwindigkeiten
Werksnelheden**

Mechanisms Mécanismes Antriebe Aandrijvingen	Speeds Vitesses Geschwindigkeiten Snelheden	Rope diameter Diamètre du câble Seildurchmesser Kabeldiameter	Single line pull Effort sur brin simple Zulässiger Seilzug je Strang Toegelaten trekkkracht per part	Rope length Longueur des câbles Länge der Seile Kabellengte
Main hoist Levage sur flèche Hubwerk 1 Hijster 1	74 m/min	28 mm	133 kN	850 m
Auxiliary hoist Levage sur fléchette Hubwerk 2 Hijster 2	74 m/min	28 mm	133 kN	850 m
Boom derricking Relevage de flèche Wippwerk Hauptausleger Toplier hoofdmast	41 m/min	28 mm		870 m
Boom hoist Relevage de flèche Einziehwerk Toplier hoofdmast	35 m/min	28 mm		2 x 225 m
Luffing hoist Relevage de fléchette Wippwerk Toplier wipper	41 m/min	28 mm		740 m
Slewing gear Orientation Drehwerk Zwenkwerk	1 RPM 1 tr./mn. 1 U/min 1 tpm			
Travel speed low / high Translation petite / grande vitesse Fahrgeschwindigkeit 1.Gang / 2. Gang Rijwerk laag / hoog	0-0,6/0-1,2 km/h			

Hook block/Crane hook
Crochet-moufle/Crochet simple



Unterflasche/Hakengehänge
Kraanblok/Kraanhaak

Capacity Capacité Tragfähigkeit Capaciteit	Number of sheaves Nombre de poulies Anzahl der Rollen Aantal schijven	Number of lines Nombre de brins Strangzahl Aantal parten	Weight Poids Gewicht Gewicht	"B"
SWL 500 t	2 x 11	2 x 22	9500 kg	4,60 m
SWL 300 t	2 x 5	2 x 11	8515 kg	4,30 m
SWL 150 t	5	11	5525 kg	4,30 m
SWL 125 t	6	13	3040 kg	4,30 m
SWL 42 t	1	3	2610 kg	2,70 m