




sarens
group

www.sarens.com

TEREX TC 3200 H

500 TON

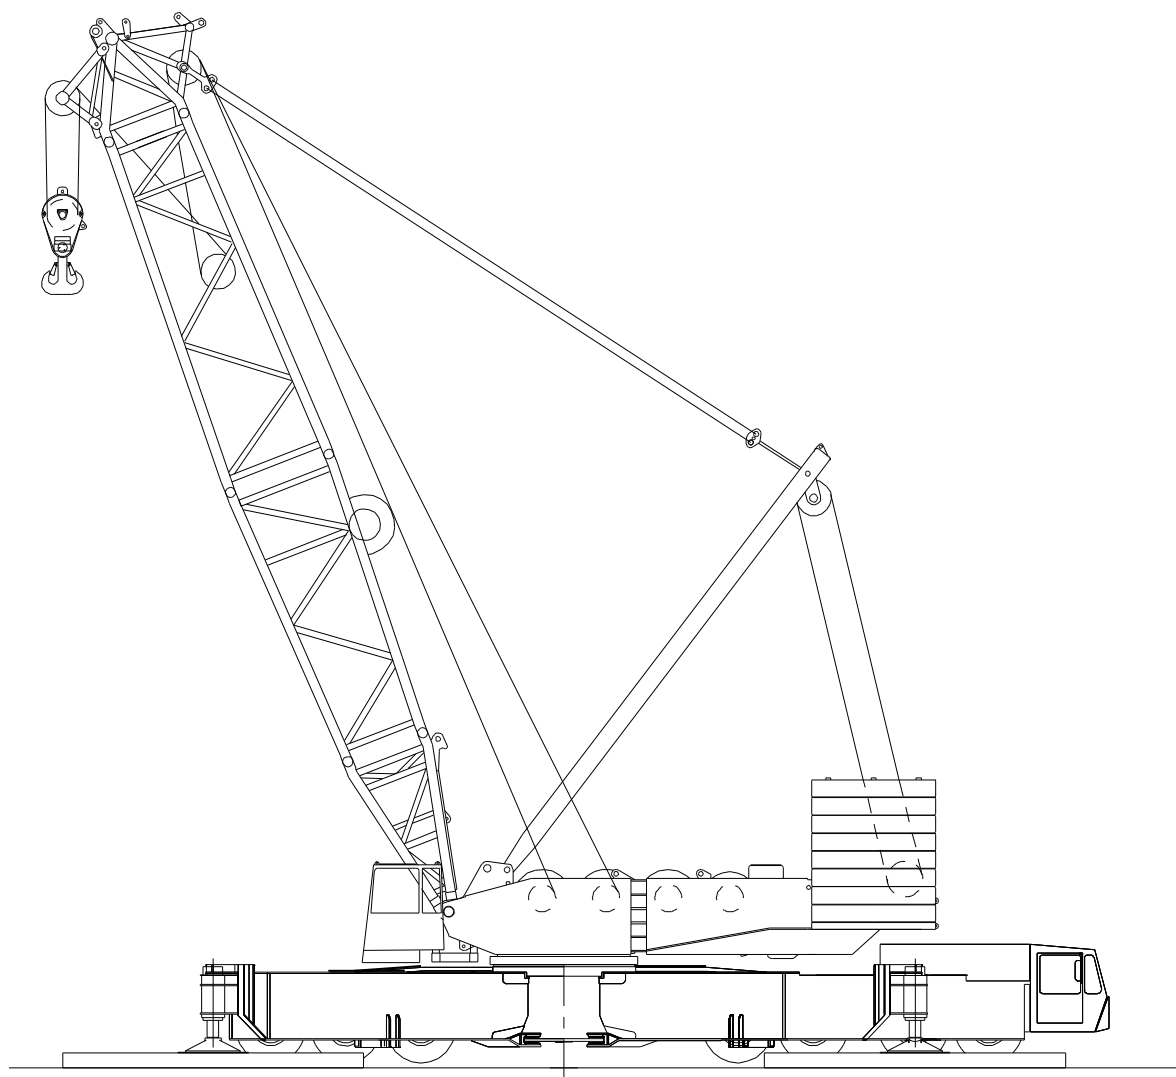

nothing too heavy, nothing too high










TEREX TC 3200 H

500 TON


**Weight
Poids**

**Gewicht
Gewicht**






Total weight (A-frame dismantled) Poids total (Chevalet démonté) Gesamtgewicht (A-Bock demontiert) Totaal gewicht (A-frame gedemonteerd)	84.0 t
Axle load Charge par essieu Achslast Aslast	12.0 t
Counterweight Contrepoids Gegengewicht Tegengewicht	149.0 t

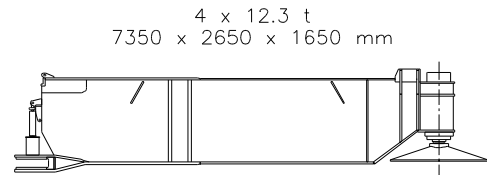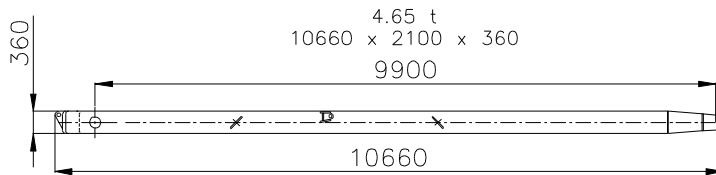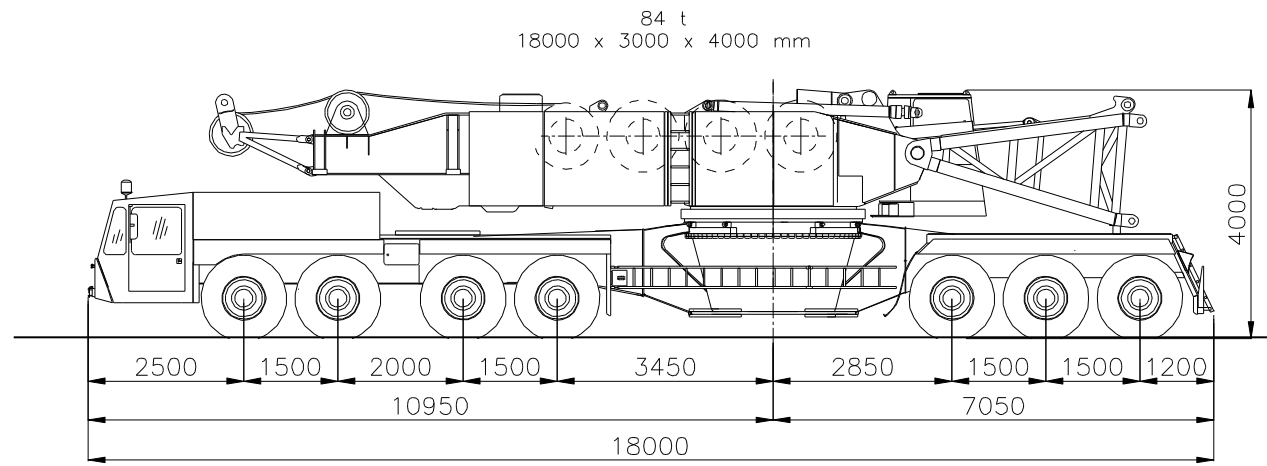

2 x 4.56 t
2470x1850x710 mm



14 x 10 t
2470x1750x540 mm






TEREX TC 3200 H


Configurations
Configurations

500 TON


Konfigurationen
Configuraties

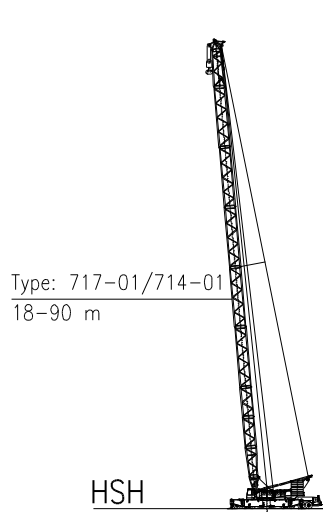


P.6-7

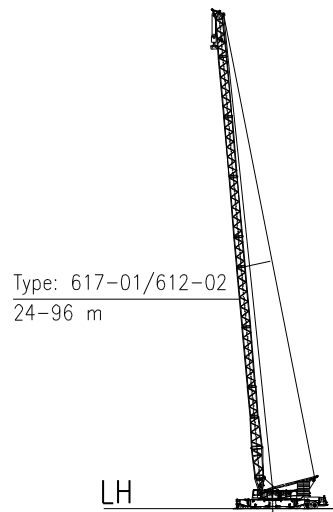


P.8-9

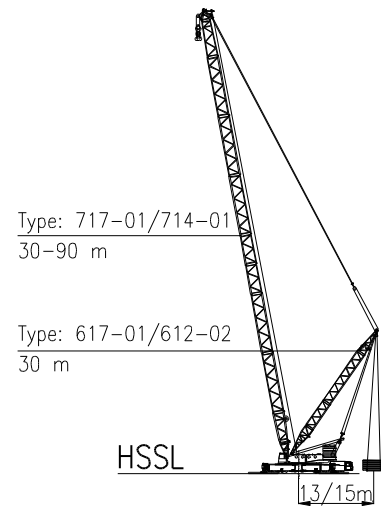


P.10-16

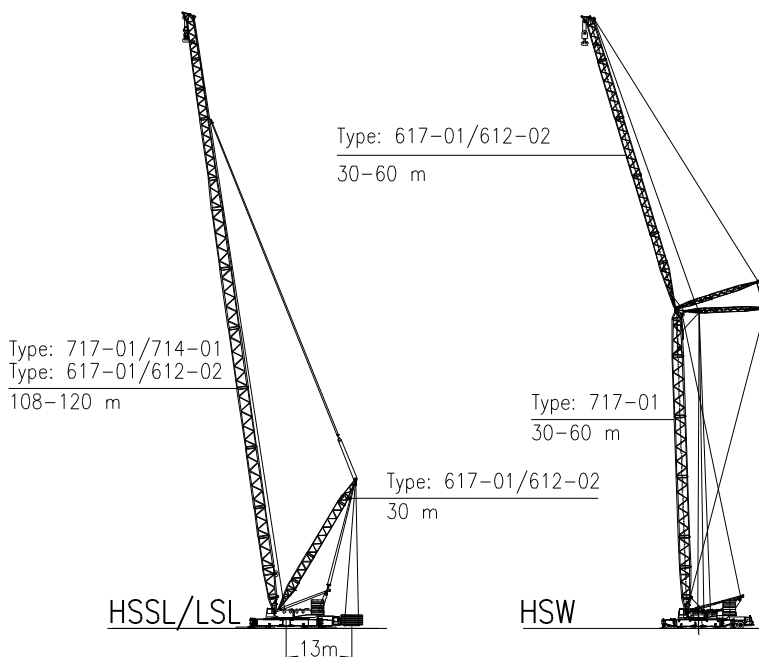

P.17

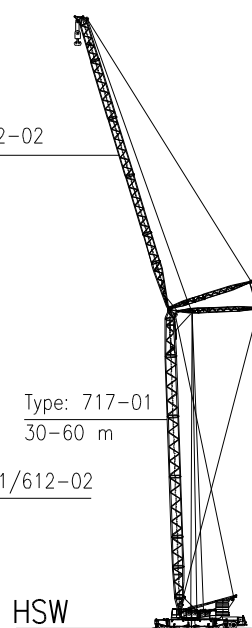

P.18-21

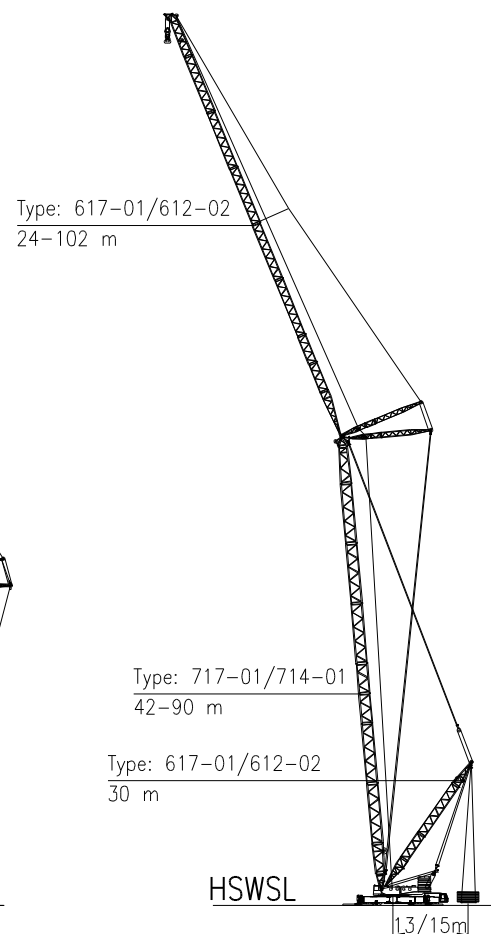

P.22-39




TEREX TC 3200 H

Working ranges
Portées

500 TON

Arbeitsbereiche
Werkbereich

HSH

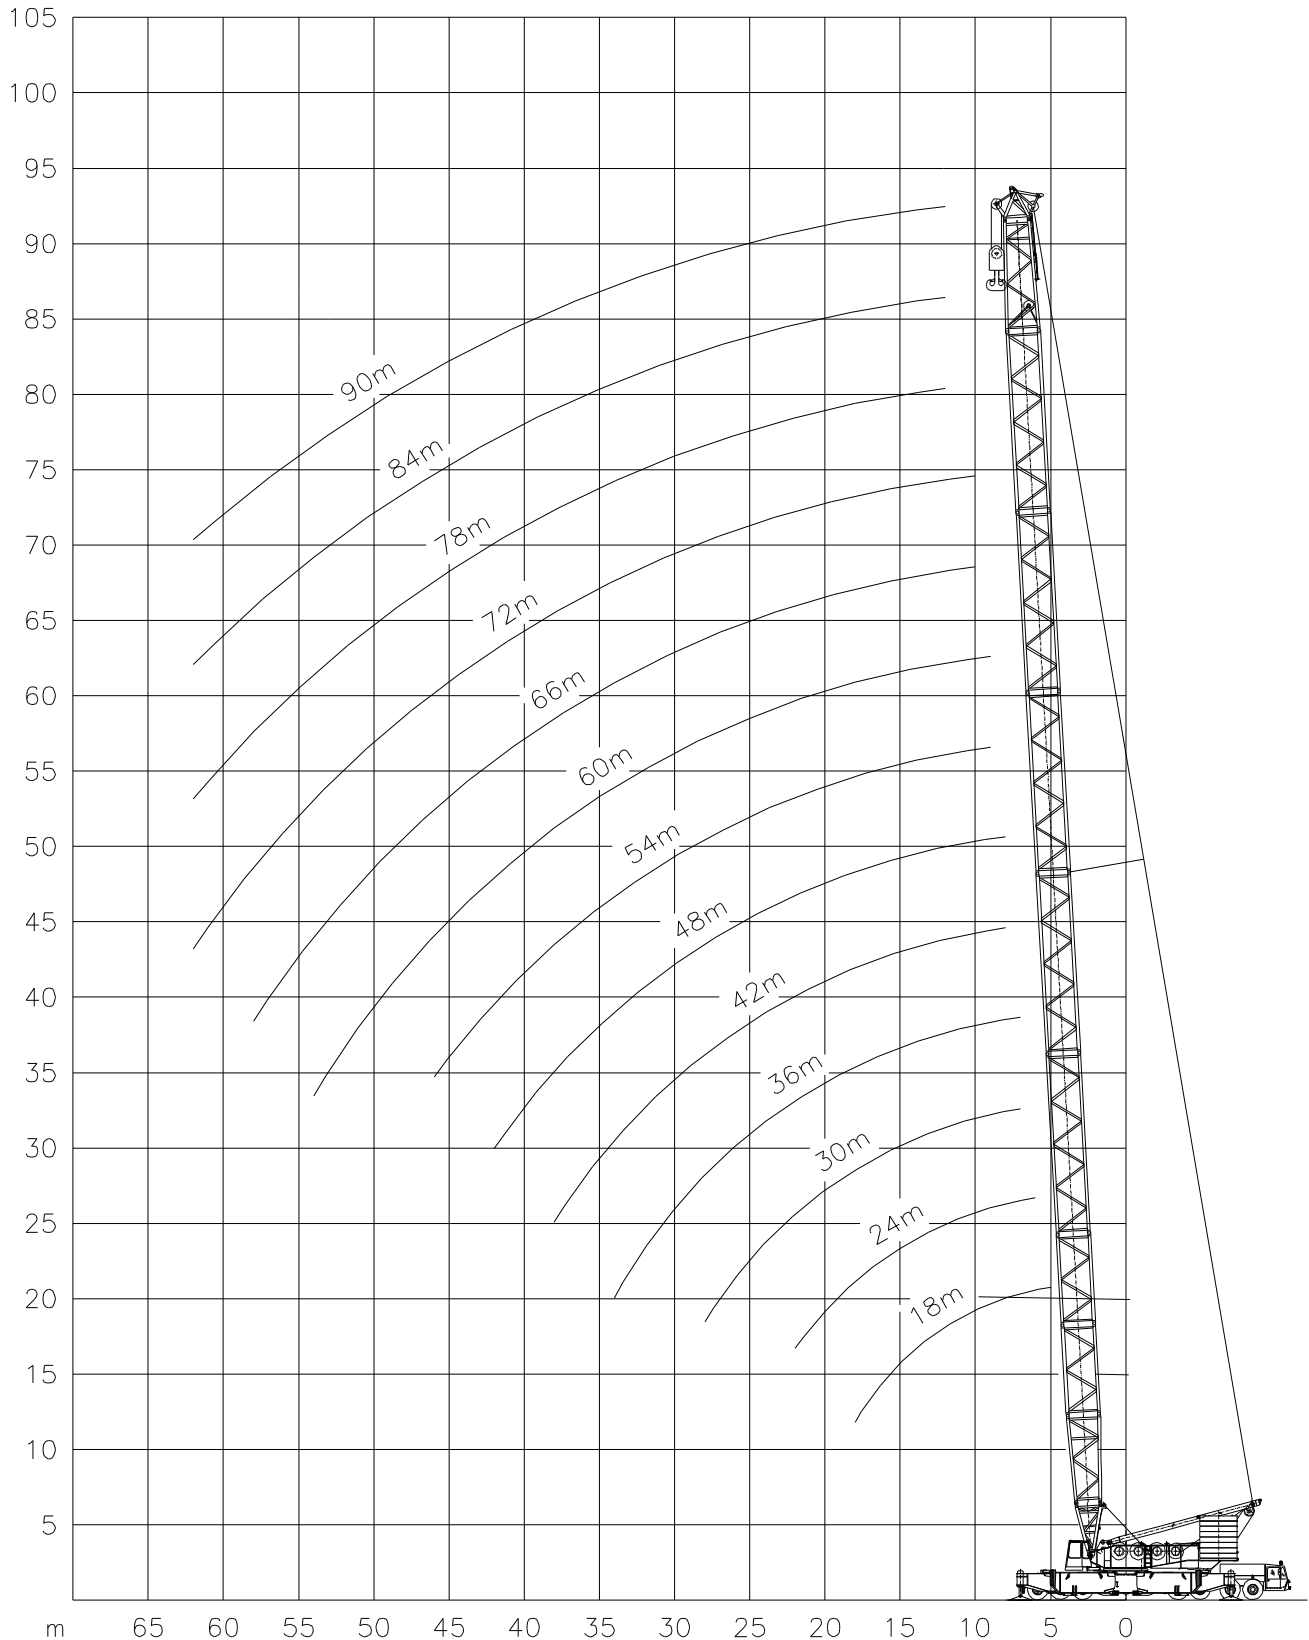




TEREX TC 3200 H



500 TON

Lifting capacities
Capacités


Tragfähigkeiten
Capacités





HSH



	18m	24m	30m	36m	42m	48m	54m	60m	66m	72m	78m	84m	90m**
	t	t	t	t	t	t	t	t	t	t	t	t	t
5.0	450*/500**	-	-	-	-	-	-	-	-	-	-	-	-
6.0	432.0*	400.0*	-	-	-	-	-	-	-	-	-	-	-
7.0	375.0*	373.0*	370.0*	369.0*	-	-	-	-	-	-	-	-	-
8.0	331.0*	329.0*	327.0*	325.0*	323.0*	309.0*	-	-	-	-	-	-	-
9.0	296.0*	294.0*	292.0*	290.0*	288.0*	286.0*	281.0*	279.0*	-	-	-	-	-
10.0	267.0*	265.0*	263.0*	261.0*	260.0*	258.0*	256.0*	255.0*	246.0*	225.0*	-	-	-
12.0	222.0*	220.0*	218.0*	216.0*	215.0*	213.0*	211.0*	210.0*	209.0*	208.0*	197.0*	170.0*	141.0*
14.0	187.0*	185.0*	183.0*	182.0*	180.0*	178.0*	177.0*	176.0*	175.0*	174.0*	173.0*	165.0*	141.0*
16.0	150.0*	160.0*	158.0*	157.0*	155.0*	153.0*	152.0*	151.0*	150.0*	149.0*	148.0*	146.0*	137.0*
18.0	113.0	140.0	138.0	137.0	135.0	133.0	132.0	131.0	130.0	129.0	128.0*	126.0*	125.0*
20.0	-	117.0	123.0	122.0	120.0	118.0	117.0	115.0	114.0	113.0	112.0	111.0	110.0*
22.0	-	96.0	109.0	109.0	107.0	105.0	104.0	103.0	102.0	101.0	100.0	99.0	98.0
24.0	-	-	93.0	98.0	97.0	95.0	94.0	92.0	91.0	90.0	89.0	88.0	87.0
26.0	-	-	79.0	87.0	88.0	86.0	85.0	84.0	83.0	82.0	81.0	80.0	79.0
28.0	-	-	66.0	76.0	79.0	79.0	78.0	76.0	75.0	74.0	73.0	72.0	71.0
30.0	-	-	-	66.0	70.0	71.0	72.0	70.0	69.0	68.0	67.0	66.0	65.0
34.0	-	-	-	48.0	54.0	57.0	58.0	58.0	57.0	56.0	54.0	54.0	52.0
38.0	-	-	-	-	41.0	45.0	46.0	47.0	46.0	46.0	45.0	44.0	42.0
42.0	-	-	-	-	-	34.0	37.0	38.0	37.0	37.0	36.0	36.0	34.0
46.0	-	-	-	-	-	-	28.0	30.0	30.0	30.0	29.0	29.0	28.0
50.0	-	-	-	-	-	-	-	23.0	23.0	24.0	23.0	23.0	22.0
54.0	-	-	-	-	-	-	-	17.0	18.0	19.0	18.0	18.0	17.0
58.0	-	-	-	-	-	-	-	-	12.0	14.0	13.0	13.0	13.0
62.0	-	-	-	-	-	-	-	-	-	9.0	9.0	9.0	9.0



HSH



	18m	24m	30m	36m	42m	48m	54m	60m	66m	72m	78m	84m	90m
	t	t	t	t	t	t	t	t	t	t	t	t	t
5.0	450.0*	-	-	-	-	-	-	-	-	-	-	-	-
6.0	432.0*	400.0*	-	-	-	-	-	-	-	-	-	-	-
7.0	375.0*	373.0*	370.0*	369.0*	-	-	-	-	-	-	-	-	-
8.0	331.0*	329.0*	327.0*	325.0*	323.0*	309.0*	-	-	-	-	-	-	-
9.0	296.0*	294.0*	292.0*	290.0*	288.0*	286.0*	281.0*	279.0*	-	-	-	-	-
10.0	267.0*	265.0*	263.0*	261.0*	260.0*	258.0*	256.0*	255.0*	246.0*	225.0*	-	-	-
12.0	222.0*	220.0*	218.0*	216.0*	215.0*	213.0*	211.0*	210.0*	209.0*	208.0*	-	-	-
14.0	172.0*	170.0*	169.0*	168.0*	167.0*	166.0*	166.0*	165.0*	164.0*	164.0*	-	-	-
16.0	137.0	136.0	134.0	133.0	132.0	131.0	131.0	130.0	129.0	129.0	-	-	-
18.0	113.0	112.0	111.0	110.0	108.0	107.0	107.0	106.0	105.0	105.0	-	-	-
20.0	-	95.0	94.0	93.0	91.0	90.0	90.0	89.0	88.0	87.0	-	-	-
22.0	-	83.0	81.0	80.0	78.0	77.0	76.0	75.0	74.0	74.0	-	-	-
24.0	-	-	71.0	70.0	68.0	67.0	66.0	65.0	64.0	64.0	-	-	-
26.0	-	-	63.0	62.0	60.0	59.0	58.0	57.0	56.0	55.0	-	-	-
28.0	-	-	57.0	55.0	53.0	52.0	51.0	50.0	49.0	49.0	-	-	-
30.0	-	-	-	50.0	48.0	47.0	46.0	45.0	43.0	43.0	-	-	-
34.0	-	-	-	41.0	39.0	38.0	37.0	36.0	34.0	33.0	-	-	-
38.0	-	-	-	-	33.0	31.0	30.0	28.0	27.0	26.0	-	-	-
42.0	-	-	-	-	-	26.0	24.0	23.0	21.0	20.0	-	-	-
46.0	-	-	-	-	-	-	20.0	18.0	16.0	15.0	-	-	-
50.0	-	-	-	-	-	-	-	15.0	13.0	12.0	-	-	-
54.0	-	-	-	-	-	-	-	12.0	10.0	9.0	-	-	-
58.0	-	-	-	-	-	-	-	-	8.0	-	-	-	-

*: Double hook block required

**: Only with outriggers 15.5 x 15.5m




TEREX TC 3200 H

Working ranges
Portées

500 TON

Arbeitsbereiche
Werkbereich

LH

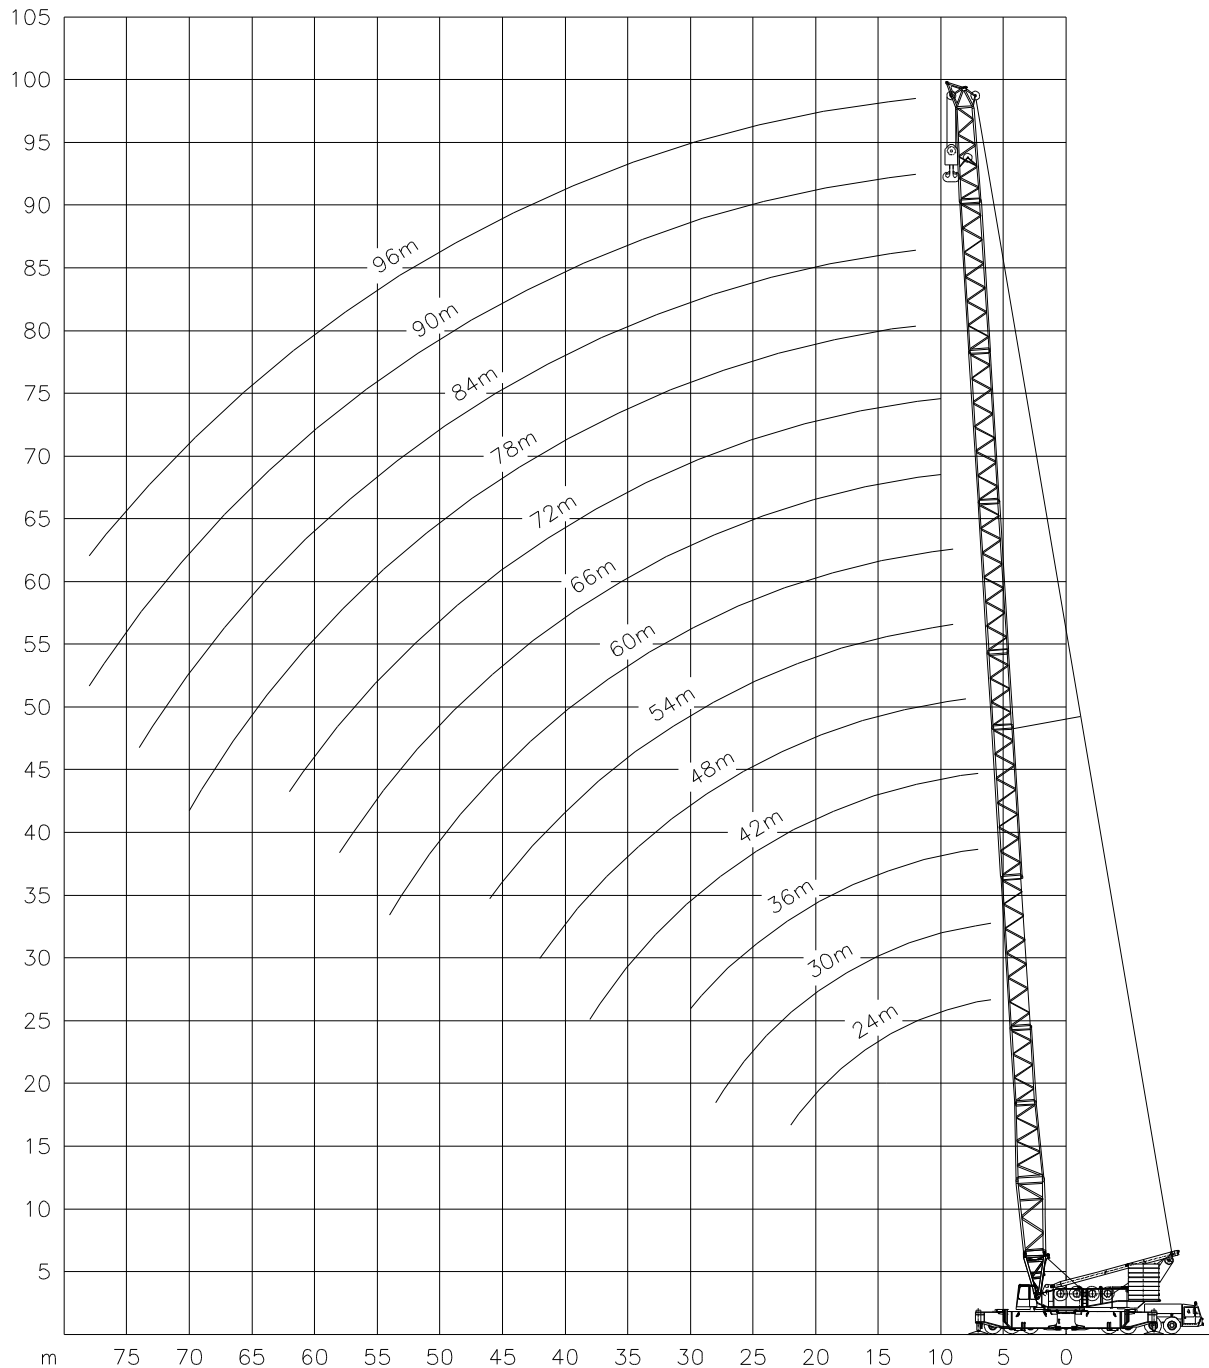




TEREX TC 3200 H



500 TON

Lifting capacities
Capacités


Tragfähigkeiten
Capacités




LH



	24m	30m	36m	42m	48m	54m	60m	66m	72m	78m	84m	90m	96m
	t	t	t	t	t	t	t	t	t	t	t	t	t
6.0	300.0*	300.0*	-	-	-	-	-	-	-	-	-	-	-
7.0	300.0*	300.0*	270.0*	236.0*	-	-	-	-	-	-	-	-	-
8.0	300.0*	300.0*	268.0*	236.0*	206.0*	-	-	-	-	-	-	-	-
9.0	300.0*	300.0*	265.0*	236.0*	204.0*	171.0*	154.0	-	-	-	-	-	-
10.0	300.0*	300.0*	259.0*	229.0*	202.0*	167.0*	154.0	127.0	108.0	-	-	-	-
12.0	260.0*	259.0*	244.0*	216.0*	196.0*	160.0*	150.0	122.0	108.0	89.0	75.0	65.0	57.0
14.0	217.0*	219.0*	218.0*	200.0*	188.0*	153.0*	145.0	117.0	106.0	86.0	72.0	63.0	57.0
16.0	178.0*	186.0*	188.0*	183.0*	178.0*	145.0*	139.0	112.0	104.0	84.0	69.0	61.0	55.0
18.0	147.0*	157.0*	161.0*	162.0*	162.0*	138.0	133.0	107.0	101.0	81.0	67.0	59.0	53.0
20.0	122.0	134.0	139.0	141.0	141.0	130.0	127.0	102.0	98.0	79.0	64.0	58.0	52.0
22.0	100.0	115.0	121.0	124.0	124.0	121.0	120.0	98.0	94.0	76.0	62.0	56.0	50.0
24.0	-	99.0	106.0	109.0	108.0	111.0	107.0	93.0	91.0	73.0	60.0	54.0	48.0
26.0	-	85.0	92.0	97.0	96.0	95.0	95.0	88.0	86.0	71.0	58.0	52.0	46.0
28.0	-	72.0	82.0	85.0	86.0	85.0	84.0	83.0	82.0	68.0	55.0	50.0	44.0
30.0	-	-	72.0	73.0	77.0	77.0	76.0	76.0	75.0	65.0	53.0	49.0	42.0
34.0	-	-	-	57.0	63.0	64.0	63.0	62.0	62.0	59.0	49.0	45.0	39.0
38.0	-	-	-	48.0	51.0	54.0	53.0	53.0	52.0	51.0	45.0	42.0	35.0
42.0	-	-	-	-	42.0	46.0	45.0	45.0	44.0	44.0	42.0	39.0	31.0
46.0	-	-	-	-	-	37.0	39.0	39.0	38.0	38.0	37.0	36.0	28.0
50.0	-	-	-	-	-	-	33.0	34.0	34.0	33.0	32.0	32.0	25.0
54.0	-	-	-	-	-	-	26.0	28.0	30.0	29.0	28.0	28.0	22.0
58.0	-	-	-	-	-	-	-	23.0	25.0	25.0	25.0	24.0	19.0
62.0	-	-	-	-	-	-	-	-	20.0	21.0	22.0	21.0	17.0
66.0	-	-	-	-	-	-	-	-	-	17.0	18.0	18.0	14.0
70.0	-	-	-	-	-	-	-	-	-	13.0	14.0	15.0	12.0
74.0	-	-	-	-	-	-	-	-	-	-	11.0	12.0	11.0
78.0	-	-	-	-	-	-	-	-	-	-	-	9.0	9.0



LH



	24m	30m	36m	42m	48m	54m	60m	66m	72m	78m	84m	90m	96m
	t	t	t	t	t	t	t	t	t	t	t	t	t
6.0	300.0*	300.0*	-	-	-	-	-	-	-	-	-	-	-
7.0	300.0*	300.0*	270.0*	236.0*	-	-	-	-	-	-	-	-	-
8.0	300.0*	300.0*	268.0*	236.0*	206.0*	-	-	-	-	-	-	-	-
9.0	300.0*	300.0*	265.0*	236.0*	204.0*	171.0*	154.0	-	-	-	-	-	-
10.0	300.0*	299.0*	259.0*	229.0*	202.0*	167.0*	154.0	127.0	108.0	-	-	-	-
12.0	245.0*	244.0*	244.0*	216.0*	196.0*	160.0*	150.0	122.0	108.0	89.0	75.0	65.0	-
14.0	196.0*	195.0*	218.0*	200.0*	188.0*	153.0*	145.0	117.0	106.0	86.0	72.0	63.0	-
16.0	157.0*	156.0*	188.0*	183.0*	154.0*	145.0*	139.0	112.0	104.0	84.0	69.0	61.0	-
18.0	131.0	130.0	161.0*	162.0*	127.0	127.0	126.0	107.0	101.0	81.0	67.0	59.0	-
20.0	111.0	110.0	139.0	141.0	108.0	107.0	107.0	102.0	98.0	79.0	64.0	58.0	-
22.0	95.0	94.0	121.0	124.0	92.0	91.0	91.0	91.0	90.0	76.0	62.0	56.0	-
24.0	-	82.0	106.0	109.0	80.0	79.0	78.0	78.0	78.0	73.0	60.0	54.0	-
26.0	-	73.0	92.0	97.0	70.0	70.0	69.0	69.0	68.0	68.0	58.0	52.0	-
28.0	-	65.0	82.0	85.0	62.0	62.0	61.0	61.0	60.0	60.0	55.0	50.0	-
30.0	-	-	72.0	73.0	56.0	55.0	55.0	54.0	54.0	53.0	53.0	49.0	-
34.0	-	-	-	57.0	46.0	45.0	44.0	44.0	44.0	43.0	43.0	42.0	-
38.0	-	-	-	48.0	39.0	38.0	37.0	37.0	36.0	35.0	35.0	35.0	-
42.0	-	-	-	-	33.0	32.0	31.0	31.0	30.0	30.0	29.0	29.0	-
46.0	-	-	-	-	-	28.0	27.0	27.0	26.0	25.0	25.0	24.0	-
50.0	-	-	-	-	-	-	23.0	23.0	22.0	21.0	21.0	20.0	-
54.0	-	-	-	-	-	-	20.0	20.0	19.0	18.0	18.0	17.0	-
58.0	-	-	-	-	-	-	-	17.0	16.0	15.0	15.0	14.0	-
62.0	-	-	-	-	-	-	-	-	14.0	13.0	12.0	12.0	-
66.0	-	-	-	-	-	-	-	-	-	11.0	10.0	9.0	-
70.0	-	-	-	-	-	-	-	-	-	9.0	9.0	8.0	-
74.0	-	-	-	-	-	-	-	-	-	-	7.0	-	-

*: Double hook block required




TEREX TC 3200 H

Working ranges
Portées

500 TON

Arbeitsbereiche
Werkbereich

HSSL + HSSL / LSL

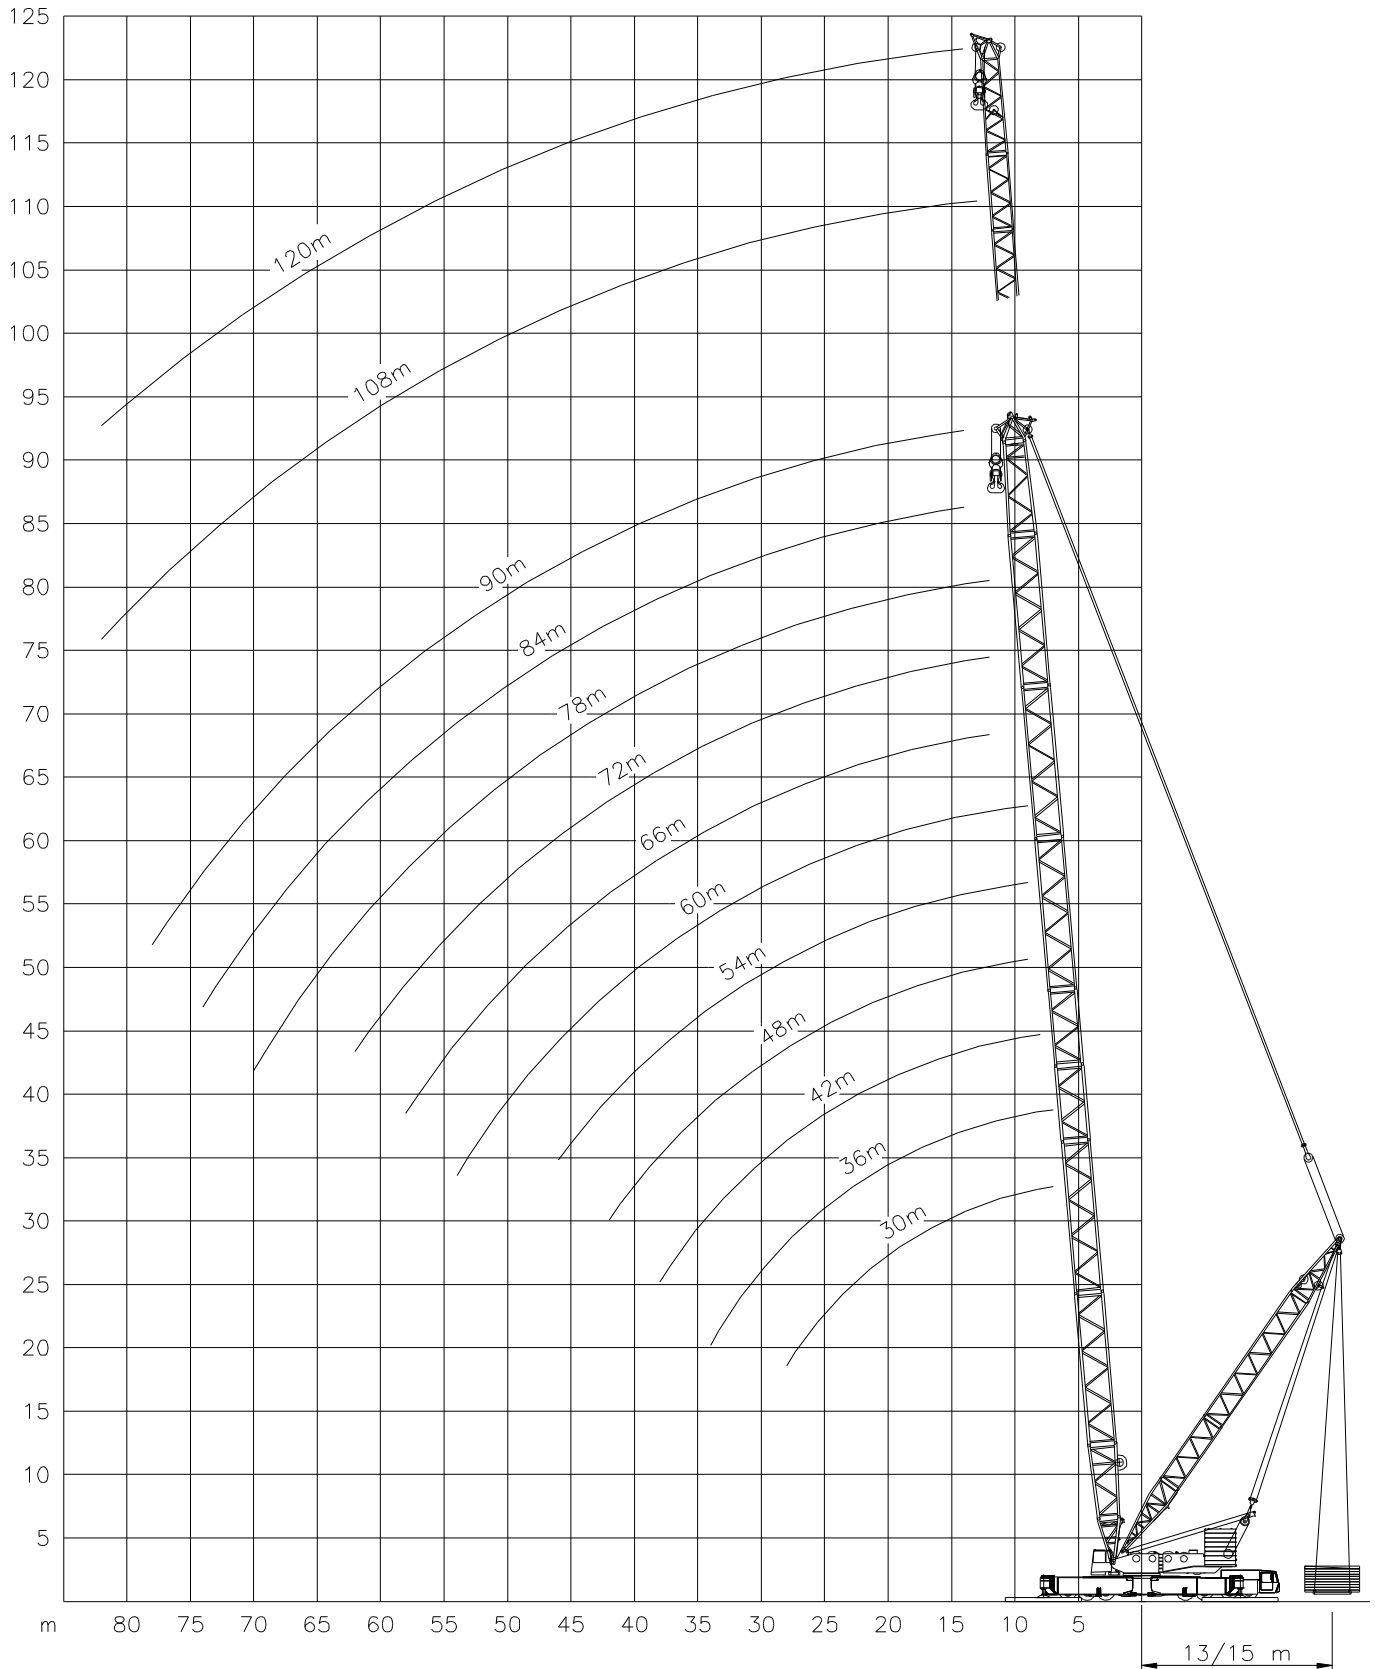




TEREX TC 3200 H


Lifting capacities
Capacités

500 TON

Tragfähigkeiten
Capacités



HSSL



MB	m	superlift					
		0t	50t	100t	150t	200t	250t
		t	t	t	t	t	t
30 m	7.0	455.0*	486.0*	500.0*	-	-	-
	8.0	419.0*	447.0*	475.0*	-	-	-
	9.0	388.0*	414.0*	440.0*	466.0*	-	-
	10.0	353.0*	386.0*	410.0*	434.0*	-	-
	12.0	275.0*	335.0*	360.0*	381.0*	403.0*	-
	14.0	224.0*	274.0*	320.0*	340.0*	359.0*	-
	16.0	188.0*	231.0*	274.0*	306.0*	323.0*	340.0*
	18.0	161.0*	199.0*	236.0*	273.0*	294.0*	310.0*
	20.0	140.0	175.0*	208.0*	240.0*	269.0*	284.0*
	22.0	124.0	156.0*	185.0*	214.0*	243.0*	258.0*
	24.0	111.0	140.0	166.0*	193.0*	219.0*	232.0*
	26.0	100.0	127.0	151.0*	175.0*	199.0*	209.0*
36 m	7.0	453.0*	475.0*	-	-	-	-
	8.0	417.0*	445.0*	455.0*	-	-	-
	9.0	386.0*	412.0*	435.0*	-	-	-
	10.0	354.0*	383.0*	408.0*	431.0*	-	-
	12.0	276.0*	335.0*	358.0*	379.0*	401.0*	-
	14.0	224.0*	275.0*	318.0*	338.0*	357.0*	-
	16.0	187.0*	231.0*	274.0*	304.0*	321.0*	339.0*
	18.0	160.0*	199.0*	236.0*	273.0*	292.0*	308.0*
	20.0	139.0	174.0*	207.0*	240.0*	267.0*	282.0*
	22.0	123.0	155.0*	184.0*	213.8*	243.0*	260.0*
	24.0	109.0	139.0	165.0*	192.0*	219.0*	241.0*
	26.0	98.0	126.0	150.0*	174.0*	199.0*	223.0*
42 m	8.0	414.0*	426.0*	426.0*	-	-	-
	9.0	384.0*	410.0*	426.0*	-	-	-
	10.0	352.0*	381.0*	405.0*	418.0*	-	-
	12.0	274.0*	333.0*	356.0*	377.0*	398.0*	-
	14.0	222.0*	273.0*	316.0*	335.0*	355.0*	-
	16.0	185.0*	230.0*	272.0*	302.0*	319.0*	336.0*
	18.0	158.0*	198.0*	235.0*	272.0*	290.0*	306.0*
	20.0	137.0	173.0*	206.0*	238.0*	265.0*	280.0*
	22.0	120.0	153.0*	182.0*	212.0*	241.0*	258.0*
	24.0	107.0	137.0	164.0*	190.0*	217.0*	239.0*
	26.0	96.0	124.0	148.0*	173.0*	197.0*	220.0*
	28.0	86.0	113.8	135.0	158.0*	180.0*	202.0*
42 m	30.0	78.0	103.0	124.0	145.0*	166.0*	186.0*
	34.0	65.0	88.0	106.0	124.0	142.0	161.0*
	38.0	55.0	77.0	93.0	109.0	125.0	140.0

MB	m	superlift					
		0t	50t	100t	150t	200t	250t
		t	t	t	t	t	t
48 m	9.0	382.0*	395.0*	395.0*	-	-	-
	10.0	350.0*	379.0*	395.0*	395.0*	-	-
	12.0	273.0*	331.0*	354.0*	375.0*	391.0*	-
	14.0	221.0*	273.0*	315.0*	334.0*	353.0*	-
	16.0	184.0*	229.0*	272.0*	300.0*	317.0*	335.0*
	18.0	157.0*	197.0*	234.0*	272.0*	288.0*	304.0*
	20.0	136.0	172.0*	205.0*	238.0*	264.0*	278.0*
	22.0	119.0	152.0*	182.0*	211.0*	240.0*	256.0*
	24.0	105.0	136.0	163.0*	190.0*	216.0*	237.0*
	26.0	94.0	123.0	147.0*	172.0*	196.0*	219.0*
	28.0	85.0	112.0	134.0	157.0*	179.0*	202.0*
	30.0	77.0	102.0	123.0	144.0*	165.0*	185.0*
54 m	34.0	64.0	87.0	105.0	123.0	141.0	159.0*
	38.0	53.0	75.0	91.0	107.0	123.0	139.0
	42.0	46.0	66.0	80.0	95.0	109.0	124.0
	9.0	350.0*	350.0*	350.0*	-	-	-
	10.0	348.0*	350.0*	350.0*	-	-	-
	12.0	274.0*	329.0*	350.0*	350.0*	-	-
	14.0	221.0*	273.0*	312.0*	331.0*	350.0*	-
	16.0	183.0*	229.0*	272.0*	298.0*	315.0*	332.0*
	18.0	156.0*	197.0*	234.0*	268.0*	286.0*	302.0*
	20.0	134.0	171.0*	204.0*	237.0*	261.0*	276.0*
	22.0	118.0	152.0*	181.0*	211.0*	238.0*	254.0*
	24.0	104.0	135.0	162.0*	189.0*	216.0*	235.0*
60 m	26.0	93.0	122.0	146.0*	171.0*	195.0*	217.0*
	28.0	83.0	111.0	133.0	156.0*	178.0*	200.0*
	30.0	75.0	101.0	122.0	143.0*	164.0*	185.0*
	34.0	62.0	86.0	104.0	122.0	140.0	158.0*
	38.0	52.0	74.0	90.0	106.0	122.0	138.0
	42.0	44.0	64.0	79.0	93.0	108.0	122.0
	46.0	38.0	56.0	70.0	83.0	96.0	109.0
	9.0	310.0*	310.0*	-	-	-	-
	10.0	310.0*	310.0*	310.0*	-	-	-
	12.0	275.0*	310.0*	310.0*	310.0*	-	-
	14.0	221.0*	274.0*	310.0*	310.0*	-	-
	16.0	183.0*	230.0*	271.0*	296.0*	310.0*	-
60 m	18.0	156.0*	197.0*	234.0*	267.0*	284.0*	300.0*
	20.0	134.0	171.0*	205.0*	237.0*	260.0*	274.0*
	22.0	117.0	151.0*	181.0*	211.0*	237.0*	252.0*
	24.0	103.0	135.0	162.0*	189.0*	215.0*	233.0*
	26.0	92.0	122.0	146.0*	171.0*	195.0*	215.0*
	28.0	83.0	110.0	133.0	155.0*	178.0*	199.0*
	30.0	74.0	101.0	121.0	142.0	163.0*	184.0*
	34.0	61.0	85.0	103.0	121.0	140.0	158.0*
	38.0	51.0	73.0	89.0	105.0	121.0	138.0
	42.0	43.0	62.0	78.0	92.0	107.0	121.0
	46.0	37.0	54.0	69.0	82.0	95.0	108.0
	50.0	32.0	48.0	61.0	74.0	86.0	98.0
	54.0	27.0	42.0	55.0	66.0	77.0	89.0

*: Double hook block required




TEREX TC 3200 H



Lifting capacities
Capacités

500 TON

Tragfähigkeiten
Capacités



HSSL



MB	m	superlift					
		0t	50t	100t	150t	200t	250t
66 m	10.0	285.0*	285.0*	285.0*	-	-	-
	12.0	275.0*	285.0*	285.0*	-	-	-
	14.0	220.0*	273.0*	285.0*	285.0*	-	-
	16.0	182.0*	229.0*	268.0*	285.0*	285.0*	-
	18.0	154.0*	196.0*	234.0*	265.0*	282.0*	285.0*
	20.0	133.0	171.0*	204.0*	235.0*	257.0*	272.0*
	22.0	116.0	150.0*	180.0*	210.0*	235.0*	250.0*
	24.0	102.0	134.0	161.0*	188.0*	213.8*	231.0*
	26.0	90.0	120.0	145.0*	170.0*	194.0*	213.0*
	28.0	81.0	109.0	132.0	154.0*	177.0*	197.0*
	30.0	73.0	99.0	120.0	141.0	162.0*	182.0*
	34.0	59.0	84.0	102.0	120.0	138.0	157.0*
	38.0	49.0	71.0	88.0	104.0	120.0	136.0
	42.0	41.0	60.0	76.0	91.0	105.0	120.0
	46.0	35.0	52.0	67.0	80.0	94.0	107.0
	50.0	29.0	45.0	60.0	72.0	84.0	96.0
	54.0	25.0	40.0	53.0	65.0	76.0	87.0
	58.0	21.0	35.0	48.0	59.0	69.0	79.0
72 m	10.0	263.0*	263.0*	-	-	-	-
	12.0	263.0*	263.0*	263.0*	-	-	-
	14.0	221.0*	263.0*	263.0*	263.0*	-	-
	16.0	182.0*	230.0*	263.0*	263.0*	-	-
	18.0	154.0*	196.0*	233.0*	263.0*	263.0*	-
	20.0	132.0	171.0*	204.0*	234.0*	256.0*	263.0*
	22.0	115.0	150.0*	180.0*	209.0*	233.0*	248.0*
	24.0	101.0	134.0	161.0*	188.0*	212.0*	230.0*
	26.0	90.0	120.0	145.0*	169.0*	193.0*	212.0*
	28.0	80.0	109.0	131.0	154.0*	177.0*	195.0*
	30.0	72.0	99.0	120.0	141.0	162.0*	181.0*
	34.0	58.0	83.0	101.0	120.0	138.0	156.0*
	38.0	48.0	70.0	87.0	103.0	120.0	136.0
	42.0	40.0	59.0	76.0	90.0	105.0	119.0
	46.0	33.0	51.0	67.0	80.0	93.0	106.0
	50.0	28.0	44.0	59.0	71.0	83.0	95.0
	54.0	24.0	38.0	53.0	64.0	75.0	86.0
	58.0	20.0	34.0	47.0	58.0	68.0	78.0
78 m	12.0	230.0*	230.0*	230.0*	-	-	-
	14.0	221.0*	230.0*	230.0*	-	-	-
	16.0	182.0*	230.0*	230.0*	230.0*	-	-
	18.0	153.0*	196.0*	230.0*	230.0*	230.0*	-
	20.0	131.0*	170.0*	204.0*	230.0*	230.0*	-
	22.0	114.0	150.0*	180.0*	207.0*	226.0*	226.0*
	24.0	100.0	133.0*	160.0*	187.0*	210.0*	219.0*
	26.0	88.0	119.0	144.0*	169.0*	191.0*	210.0*
	28.0	79.0	108.0	130.0	153.0*	175.0*	194.0*
	30.0	70.0	98.0	119.0	140.0*	161.0*	179.0*
	34.0	57.0	81.0	100.0	119.0	137.0*	154.0*
	38.0	47.0	68.0	86.0	102.0	118.0	134.0*
	42.0	38.0	58.0	75.0	89.0	104.0	118.0
	46.0	32.0	49.0	65.0	79.0	92.0	105.0
	50.0	26.0	42.0	58.0	70.0	82.0	94.0
	54.0	22.0	37.0	51.0	62.0	74.0	85.0
	58.0	18.0	32.0	45.0	56.0	66.0	77.0
	62.0	15.0	27.0	40.0	51.0	60.0	70.0
	66.0	12.0	24.0	36.0	46.0	55.0	64.0
	70.0	9.0	21.0	32.0	42.0	51.0	59.0

MB	m	superlift					
		0t	50t	100t	150t	200t	250t
84 m	12.0	203.0*	203.0*	-	-	-	-
	14.0	203.0*	203.0*	203.0*	-	-	-
	16.0	183.0*	203.0*	203.0*	203.0*	-	-
	18.0	154.0*	197.0*	203.0*	203.0*	-	-
	20.0	132.0*	171.0*	203.0*	203.0*	203.0*	-
	22.0	114.0	150.0*	180.0*	203.0*	203.0*	178.0*
	24.0	100.0	133.0*	160.0*	186.0*	201.0*	201.0*
	26.0	88.0	119.0*	144.0*	169.0*	190.0*	197.0*
	28.0	78.0	108.0	130.0*	153.0*	174.0*	191.0*
	30.0	70.0	98.0	119.0*	140.0*	160.0*	178.0*
	34.0	56.0	81.0	100.0	119.0*	137.0*	153.0*
	38.0	46.0	68.0	86.0	102.0	118.0*	134.0*
	42.0	38.0	57.0	74.0	89.0	103.0	118.0*
	46.0	31.0	49.0	65.0	78.0	91.0	105.0
	50.0	26.0	42.0	57.0	69.0	81.0	94.0
	54.0	21.0	36.0	51.0	62.0	73.0	84.0
	58.0	17.0	31.0	45.0	56.0	66.0	76.0
	62.0	14.0	26.0	39.0	50.0	60.0	69.0
	66.0	11.0	23.0	35.0	45.0	54.0	63.0
90 m	70.0	8.0	20.0	31.0	41.0	50.0	58.0
	74.0	-	17.0	28.0	38.0	46.0	54.0
	12.0	180.0*	180.0*	-	-	-	-
	14.0	180.0*	180.0*	180.0*	-	-	-
	16.0	180.0*	180.0*	180.0*	-	-	-
	18.0	153.0*	179.0*	179.0*	180.0*	-	-
	20.0	131.0*	171.0*	176.0*	178.0*	-	-
	22.0	113.0*	150.0*	173.0*	175.0*	175.0*	-
	24.0	99.0	133.0*	160.0*	171.0*	171.0*	-
	26.0	87.0	119.0*	144.0*	167.0*	167.0*	-
	28.0	77.0	107.0*	130.0*	153.0*	163.0*	163.0*
	30.0	69.0	97.0	118.0*	139.0*	158.0*	158.0*
	34.0	55.0	80.0	99.0	118.0*	136.0*	148.0*
	38.0	45.0	66.0	85.0	101.0	118.0*	132.0*
	42.0	36.0	56.0	73.0	88.0	103.0	116.0*
	46.0	30.0	47.0	64.0	77.0	90.0	103.0
	50.0	24.0	40.0	56.0	68.0	80.0	92.0
	54.0	19.0	34.0	49.0	61.0	72.0	83.0
	58.0	15.0	29.0	43.0	54.0	65.0	75.0
	62.0	12.0	25.0	38.0	49.0	59.0	68.0
	66.0	9.0	21.0	33.0	44.0	53.0	62.0
	70.0	-	18.0	29.0	40.0	48.0	57.0
	74.0	-	15.0	26.0	36.0	44.0	52.0
	78.0	-	12.0	23.0	33.0	41.0	48.0

*: Double hook block required




TEREX TC 3200 H



Lifting capacities
Capacités

500 TON

Tragfähigkeiten
Capacités



HSSL



MB	m	superlift					
		0t	50t	100t	150t	200t	250t
		t	t	t	t	t	t
30 m	7.0	424.0*	458.0*	-	-	-	-
	8.0	392.0*	423.0*	455.0*	-	-	-
	9.0	364.0*	393.0*	423.0*	-	-	-
	10.0	339.0*	367.0*	395.0*	-	-	-
	12.0	265.0*	323.0*	348.0*	373.0*	-	-
	14.0	215.0*	272.0*	311.0*	333.0*	-	-
	16.0	180.0*	230.0*	278.0*	301.0*	321.0*	-
	18.0	155.0*	198.0*	240.0*	274.0*	292.0*	-
	20.0	135.0*	174.0*	211.0*	248.0*	268.0*	285.0*
	22.0	119.0*	155.0*	188.0*	221.0*	248.0*	263.0*
36 m	24.0	106.0	139.0	169.0*	199.0*	230.0*	244.0*
	26.0	96.0	126.0	154.0*	181.0*	209.0*	219.0*
	28.0	87.0	115.0	141.0	166.0*	188.0*	-
	7.0	422.0*	456.0*	-	-	-	-
	8.0	389.0*	421.0*	453.0*	-	-	-
	9.0	361.0*	391.0*	421.0*	-	-	-
	10.0	337.0*	365.0*	393.0*	-	-	-
	12.0	265.0*	321.0*	346.0*	370.0*	-	-
	14.0	215.0*	272.0*	309.0*	331.0*	-	-
	16.0	180.0*	229.0*	278.0*	299.0*	319.0*	-
42 m	18.0	154.0*	198.0*	240.0*	272.0*	290.0*	-
	20.0	134.0	173.0*	210.0*	248.0*	266.0*	-
	22.0	118.0	154.0*	187.0*	220.0*	246.0*	261.0*
	24.0	105.0	138.0	168.0*	198.0*	228.0*	243.0*
	26.0	94.0	125.0	153.0*	180.0*	208.0*	226.0*
	28.0	85.0	114.0	139.0	165.0*	190.0*	210.0*
	30.0	78.0	105.0	128.0	152.0*	175.0*	195.0*
	34.0	66.0	90.0	110.0	131.0	152.0*	157.0*
	8.0	387.0*	419.0*	435.0*	-	-	-
	9.0	359.0*	389.0*	418.0*	-	-	-
48 m	10.0	335.0*	362.0*	390.0*	-	-	-
	12.0	263.0*	319.0*	344.0*	368.0*	-	-
	14.0	213.0*	271.0*	307.0*	329.0*	-	-
	16.0	177.0*	228.0*	276.0	297.0*	316.0*	-
	18.0	151.0*	196.0*	238.0*	270.0*	288.0*	-
	20.0	131.0	171.0*	209.0*	246.0*	264.0*	-
	22.0	115.0	152.0*	185.0*	219.0*	244.0*	259.0*
	24.0	102.0	136.0	166.0*	197.0*	226.0*	241.0*
	26.0	92.0	123.0	151.0*	178.0*	206.0*	224.0*
	28.0	83.0	112.0	137.0	163.0*	188.0*	210.0*
54 m	30.0	75.0	102.0	126.0	150.0*	173.0*	197.0*
	34.0	63.0	87.0	108.0	129.0	149.0*	170.0*
	38.0	54.0	76.0	94.0	113.0	131.0	148.0*

MB	m	superlift					
		0t	50t	100t	150t	200t	250t
		t	t	t	t	t	t
48 m	9.0	357.0*	387.0*	395.0*	-	-	-
	10.0	333.0*	361.0*	388.0*	-	-	-
	12.0	262.0*	317.0*	342.0*	366.0*	-	-
	14.0	212.0*	270.0*	305.0*	327.0*	-	-
	16.0	176.0*	227.0*	275.0*	295.0*	315.0*	-
	18.0	150.0*	195.0*	237.0*	268.0*	286.0*	-
	20.0	130.0	170.0*	208.0*	245.0*	263.0*	-
	22.0	114.0	151.0*	184.0*	218.0*	242.0*	258.0*
	24.0	101.0	135.0	165.0*	196.0*	225.0*	239.0*
	26.0	90.0	122.0	150.0*	177.0*	205.0*	223.0*
54 m	28.0	81.0	111.0	136.0	162.0*	187.0*	208.0*
	30.0	73.0	101.0	125.0	149.0*	172.0*	196.0*
	34.0	61.0	86.0	107.0	127.0	148.0*	169.0*
	38.0	52.0	74.0	93.0	111.0	129.0	148.0*
	42.0	44.0	65.0	82.0	98.0	115.0	131.0
	9.0	350.0*	350.0*	-	-	-	-
	10.0	330.0*	350.0*	350.0*	-	-	-
	12.0	263.0*	315.0*	339.0*	350.0*	-	-
	14.0	211.0*	271.0*	302.0*	324.0*	-	-
	16.0	176.0*	227.0*	272.0*	292.0*	312.0*	-
60 m	18.0	149.0*	195.0*	237.0*	266.0*	284.0*	-
	20.0	129.0	170.0*	207.0*	243.0*	260.0*	-
	22.0	112.0	150.0*	184.0*	217.0*	240.0*	255.0*
	24.0	99.0	134.0	164.0*	195.0*	222.0*	237.0*
	26.0	88.0	121.0	149.0*	176.0*	204.0*	221.0*
	28.0	79.0	110.0	135.0	161.0*	186.0*	206.0*
	30.0	72.0	100.0	124.0	148.0*	171.0*	193.0*
	34.0	59.0	85.0	105.0	126.0	147.0*	168.0*
	38.0	50.0	73.0	91.0	110.0	128.0	146.0*
	42.0	42.0	64.0	80.0	97.0	113.0	130.0
66 m	46.0	36.0	56.0	71.0	86.0	101.0	116.0
	9.0	310.0*	310.0*	-	-	-	-
	10.0	310.0*	310.0*	-	-	-	-
	12.0	264.0*	310.0*	310.0*	-	-	-
	14.0	212.0*	272.0*	301.0*	310.0*	-	-
	16.0	176.0*	227.0*	271.0*	291.0*	310.0*	-
	18.0	149.0*	195.0*	237.0*	264.0*	282.0*	-
	20.0	128.0	170.0*	207.0*	242.0*	259.0*	-
	22.0	112.0	150.0*	184.0*	217.0*	238.0*	254.0*
	24.0	99.0	134.0	164.0*	195.0*	221.0*	235.0*
72 m	26.0	88.0	120.0	148.0*	176.0*	204.0*	219.0*
	28.0	79.0	109.0	135.0	160.0*	186.0*	205.0*
	30.0	71.0	100.0	123.0	147.0*	171.0*	192.0*
	34.0	58.0	84.0	105.0	126.0	146.0*	167.0*
	38.0	48.0	72.0	91.0	109.0	127.0	146.0*
	42.0	41.0	63.0	79.0	96.0	112.0	129.0
	46.0	35.0	54.0	70.0	85.0	100.0	115.0
	50.0	30.0	48.0	63.0	76.0	90.0	104.0
	54.0	25.0	42.0	56.0	69.0	82.0	94.0

*: Double hook block required




TEREX TC 3200 H


Lifting capacities
Capacités

500 TON

Tragfähigkeiten
Capacités



HSSL



MB	m	superlift					
		0t	50t	100t	150t	200t	250t
	10.0	285.0*	285.0*	-	-	-	-
	12.0	263.0*	285.0*	285.0*	-	-	-
	14.0	211.0*	271.0*	285.0*	285.0*	-	-
	16.0	175.0*	227.0*	268.0*	285.0*	-	-
	18.0	148.0*	194.0*	237.0*	261.0*	280.0*	-
	20.0	127.0	169.0*	207.0*	239.0*	261.0*	-
	22.0	110.0	149.0*	183.0*	216.0*	236.0*	251.0*
	24.0	97.0	133.0	163.0*	194.0*	218.0*	233.0*
	26.0	86.0	119.0	147.0*	175.0*	203.0*	216.0*
	28.0	77.0	108.0	134.0	159.0*	185.0*	202.0*
	30.0	69.0	98.0	122.0	146.0*	170.0*	190.0*
	34.0	56.0	83.0	103.0	124.0	145.0*	166.0*
	38.0	46.0	71.0	89.0	108.0	126.0	144.0*
	42.0	39.0	61.0	78.0	94.0	111.0	127.0
	46.0	32.0	52.0	69.0	84.0	99.0	114.0
	50.0	27.0	45.0	61.0	75.0	88.0	102.0
	54.0	23.0	40.0	55.0	67.0	80.0	93.0
	58.0	19.0	35.0	49.0	61.0	73.0	84.0
	10.0	263.0*	263.0*	-	-	-	-
	12.0	263.0*	263.0*	263.0*	-	-	-
	14.0	211.0*	263.0*	263.0*	-	-	-
	16.0	174.0*	227.0*	263.0*	263.0*	-	-
	18.0	147.0*	194.0*	237.0*	260.0*	263.0*	-
	20.0	126.0	169.0*	207.0*	238.0*	255.0*	-
	22.0	110.0	149.0*	182.0*	216.0*	234.0*	250.0*
	24.0	96.0	132.0	163.0*	194.0*	217.0*	231.0*
	26.0	85.0	119.0	147.0*	175.0*	202.0*	215.0*
	28.0	76.0	107.0	133.0	159.0*	185.0*	201.0*
	30.0	68.0	98.0	122.0	146.0*	169.0*	188.0*
	34.0	55.0	82.0	103.0	124.0	145.0*	165.0*
	38.0	45.0	70.0	88.0	107.0	125.0	144.0*
	42.0	38.0	60.0	77.0	94.0	110.0	127.0
	46.0	31.0	51.0	68.0	83.0	98.0	113.0
	50.0	26.0	44.0	60.0	74.0	88.0	101.0
	54.0	22.0	39.0	54.0	66.0	79.0	92.0
	58.0	18.0	34.0	48.0	60.0	72.0	83.0
	62.0	15.0	30.0	44.0	55.0	65.0	76.0
	12.0	230.0*	230.0*	-	-	-	-
	14.0	211.0*	230.0*	230.0*	-	-	-
	16.0	174.0*	227.0*	230.0*	230.0*	-	-
	18.0	146.0*	194.0*	230.0*	230.0*	-	-
	20.0	125.0	168.0*	206.0*	230.0*	230.0*	-
	22.0	109.0	148.0*	182.0*	216.0*	230.0*	-
	24.0	95.0	132.0*	162.0*	193.0*	215.0*	229.0*
	26.0	84.0	118.0	146.0*	174.0*	199.0*	213.0*
	28.0	75.0	106.0	132.0*	158.0*	184.0*	199.0*
	30.0	67.0	97.0	121.0	145.0*	169.0*	186.0*
	34.0	54.0	81.0	102.0	123.0	144.0*	164.0*
	38.0	44.0	68.0	87.0	106.0	124.0	143.0*
	42.0	36.0	58.0	76.0	92.0	109.0	126.0
	46.0	29.0	49.0	66.0	82.0	97.0	112.0
	50.0	24.0	42.0	59.0	73.0	86.0	100.0
	54.0	20.0	37.0	52.0	65.0	78.0	90.0
	58.0	16.0	32.0	47.0	59.0	70.0	82.0
	62.0	13.0	28.0	42.0	53.0	64.0	75.0
	66.0	10.0	24.0	38.0	48.0	59.0	69.0
	70.0	8.0	21.0	34.0	44.0	54.0	63.0

MB	m	superlift					
		0t	50t	100t	150t	200t	250t
	12.0	203.0*	203.0*	-	-	-	-
	14.0	203.0*	203.0*	203.0*	-	-	-
	16.0	174.0*	203.0*	203.0*	-	-	-
	18.0	147.0*	194.0*	203.0*	203.0*	-	-
	20.0	125.0*	169.0*	203.0*	203.0*	-	-
	22.0	109.0	148.0*	182.0*	203.0*	203.0*	-
	24.0	95.0	132.0*	162.0*	193.0*	203.0*	-
	26.0	84.0	118.0*	146.0*	174.0*	198.0*	203.0*
	28.0	74.0	106.0	132.0*	158.0*	184.0*	197.0*
	30.0	66.0	97.0	121.0*	145.0*	169.0*	185.0*
	34.0	53.0	81.0	102.0	123.0*	143.0*	163.0*
	38.0	43.0	68.0	87.0	106.0	124.0*	143.0*
	42.0	35.0	57.0	75.0	92.0	109.0	125.0*
	46.0	29.0	49.0	66.0	81.0	96.0	111.0
	50.0	23.0	42.0	58.0	72.0	86.0	100.0
	54.0	19.0	36.0	52.0	64.0	77.0	90.0
	58.0	15.0	31.0	46.0	58.0	70.0	82.0
	62.0	12.0	27.0	41.0	52.0	63.0	74.0
	66.0	9.0	23.0	37.0	48.0	58.0	68.0
	70.0	-	20.0	33.0	43.0	53.0	63.0
	74.0	-	17.0	29.0	40.0	49.0	57.0
	12.0	180.0*	180.0*	-	-	-	-
	14.0	180.0*	180.0*	-	-	-	-
	16.0	174.0*	180.0*	180.0*	-	-	-
	18.0	146.0*	180.0*	180.0*	-	-	-
	20.0	125.0*	168.0*	180.0*	180.0*	-	-
	22.0	108.0*	148.0*	180.0*	180.0*	-	-
	24.0	94.0	131.0*	162.0*	180.0*	180.0*	-
	26.0	83.0	117.0*	146.0*	174.0*	180.0*	-
	28.0	73.0	106.0*	132.0*	158.0*	180.0*	180.0*
	30.0	65.0	96.0	120.0*	144.0*	168.0*	176.0*
	34.0	52.0	80.0	101.0	122.0*	143.0*	161.0*
	38.0	42.0	66.0	86.0	105.0	123.0*	142.0*
	42.0	34.0	56.0	74.0	91.0	108.0*	124.0*
	46.0	27.0	47.0	65.0	80.0	95.0	110.0*
	50.0	22.0	40.0	57.0	71.0	85.0	99.0
	54.0	17.0	34.0	51.0	63.0	76.0	89.0
	58.0	14.0	29.0	45.0	57.0	69.0	80.0
	62.0	10.0	25.0	40.0	51.0	62.0	73.0
	66.0	-	21.0	35.0	46.0	57.0	67.0
	70.0	-	18.0	31.0	42.0	52.0	61.0
	74.0	-	15.0	27.0	38.0	47.0	56.0

*: Double hook block required




TEREX TC 3200 H



Lifting capacities
Capacités

500 TON

Tragfähigkeiten
Capacités



HSSL



MB	m	superlift					
		0t	50t	100t	150t	200t	250t
		t	t	t	t	t	t
30 m	7.0	404.0*	441.0*	479.0*	-	-	-
	8.0	369.0*	403.0*	438.0*	-	-	-
	9.0	334.0*	371.0*	403.0*	-	-	-
	10.0	299.0*	343.0*	373.0*	402.0*	-	-
	12.0	247.0*	296.0*	324.0*	350.0*	-	-
	14.0	186.0*	252.0*	286.0*	309.0*	332.0*	-
	16.0	148.0*	212.0*	255.0*	277.0*	297.0*	-
	18.0	122.0	176.0*	225.0*	250.0*	269.0*	288.0*
	20.0	103.0	150.0*	196.0*	228.0*	245.0*	263.0*
	22.0	89.0	130.0	171.0*	208.0*	225.0*	241.0*
36 m	7.0	401.0*	439.0*	-	-	-	-
	8.0	366.0*	401.0*	435.0*	-	-	-
	9.0	332.0*	369.0*	400.0*	-	-	-
	10.0	297.0*	341.0*	371.0*	400.0*	-	-
	12.0	245.0*	294.0*	322.0*	348.0*	-	-
	14.0	185.0*	250.0*	284.0*	307.0*	330.0*	-
	16.0	147.0*	211.0*	253.0*	275.0*	296.0*	-
	18.0	121.0	175.0*	224.0*	248.0*	267.0*	286.0*
	20.0	102.0	149.0*	195.0*	226.0*	244.0*	261.0*
	22.0	88.0	129.0	170.0*	207.0*	224.0*	236.0*
42 m	7.0	401.0*	439.0*	-	-	-	-
	8.0	366.0*	401.0*	435.0*	-	-	-
	9.0	332.0*	369.0*	400.0*	-	-	-
	10.0	297.0*	341.0*	371.0*	400.0*	-	-
	12.0	245.0*	294.0*	322.0*	348.0*	-	-
	14.0	185.0*	250.0*	284.0*	307.0*	330.0*	-
	16.0	147.0*	211.0*	253.0*	275.0*	296.0*	-
	18.0	121.0	175.0*	224.0*	248.0*	267.0*	286.0*
	20.0	102.0	149.0*	195.0*	226.0*	244.0*	261.0*
	22.0	88.0	129.0	170.0*	207.0*	224.0*	236.0*

MB	m	superlift					
		0t	50t	100t	150t	200t	250t
		t	t	t	t	t	t
48 m	9.0	329.0*	364.0*	395.0*	-	-	-
	10.0	294.0*	337.0*	366.0*	395.0*	-	-
	12.0	242.0*	291.0*	318.0*	344.0*	-	-
	14.0	183.0*	247.0*	281.0*	303.0*	326.0*	-
	16.0	144.0*	209.0*	250.0*	271.0*	292.0*	-
	18.0	118.0	172.0*	220.0*	245.0*	264.0*	282.0*
	20.0	99.0	146.0*	192.0*	223.0*	240.0*	257.0*
	22.0	85.0	126.0	167.0*	204.0*	220.0*	236.0*
	24.0	74.0	110.0	147.0*	183.0*	203.0*	218.0*
	26.0	65.0	98.0	131.0	164.0*	188.0*	202.0*
54 m	7.0	326.0*	350.0*	350.0*	-	-	-
	8.0	292.0*	334.0*	350.0*	-	-	-
	9.0	240.0*	289.0*	316.0*	341.0*	-	-
	10.0	182.0*	245.0*	278.0*	301.0*	324.0*	-
	12.0	143.0*	208.0*	248.0*	269.0*	289.0*	-
	14.0	117.0	171.0*	218.0*	242.0*	261.0*	-
	16.0	98.0	145.0*	191.0*	221.0*	238.0*	255.0*
	18.0	84.0	125.0	166.0*	202.0*	218.0*	234.0*
	20.0	73.0	109.0	146.0*	182.0*	201.0*	216.0*
	22.0	64.0	96.0	129.0	162.0*	186.0*	200.0*
60 m	7.0	310.0*	310.0*	-	-	-	-
	8.0	290.0*	310.0*	310.0*	-	-	-
	9.0	238.0*	287.0*	310.0*	310.0*	-	-
	10.0	182.0*	243.0*	276.0*	299.0*	-	-
	12.0	143.0*	207.0*	246.0*	267.0*	288.0*	-
	14.0	117.0	171.0*	217.0*	241.0*	260.0*	-
	16.0	98.0	144.0*	191.0*	219.0*	236.0*	253.0*
	18.0	83.0	124.0	165.0*	200.0*	216.0*	232.0*
	20.0	72.0	108.0	145.0*	181.0*	199.0*	214.0*
	22.0	63.0	96.0	129.0	162.0*	185.0*	198.0*

*: Double hook block required




TEREX TC 3200 H



Lifting capacities
Capacités

500 TON

Tragfähigkeiten
Capacités



HSSL



MB	m	superlift					
		0t	50t	100t	150t	200t	250t
		t	t	t	t	t	t
66 m	10.0	285.0*	285.0*	285.0*	-	-	-
	12.0	236.0*	285.0*	285.0*	-	-	-
	14.0	181.0*	241.0*	274.0*	285.0*	-	-
	16.0	142.0	206.0*	244.0*	265.0*	285.0*	-
	18.0	115.0	169.0*	215.0*	238.0*	257.0*	-
	20.0	96.0	143.0*	189.0*	216.0*	234.0*	251.0*
	22.0	82.0	123.0	164.0*	198.0*	214.0*	230.0*
	24.0	70.0	107.0	143.0*	180.0*	197.0*	212.0*
	26.0	61.0	94.0	127.0	160.0*	182.0*	196.0*
	28.0	54.0	84.0	114.0	144.0*	169.0*	182.0*
	30.0	48.0	75.0	103.0	130.0	158.0*	170.0*
	34.0	38.0	62.0	85.0	109.0	133.0	150.0*
	38.0	30.0	51.0	72.0	93.0	114.0	133.0
	42.0	24.0	43.0	62.0	80.0	99.0	117.0
	46.0	19.0	37.0	54.0	70.0	87.0	104.0
	50.0	16.0	32.0	47.0	62.0	77.0	93.0
	54.0	12.0	27.0	42.0	56.0	69.0	83.0
	58.0	10.0	24.0	37.0	50.0	63.0	76.0
72 m	10.0	263.0*	263.0*	-	-	-	-
	12.0	235.0*	263.0*	263.0*	-	-	-
	14.0	180.0*	240.0*	263.0*	263.0*	-	-
	16.0	141.0	206.0*	242.0*	263.0*	-	-
	18.0	115.0	169.0*	214.0*	237.0*	256.0*	-
	20.0	96.0	142.0	189.0*	215.0*	232.0*	249.0*
	22.0	81.0	122.0	163.0*	197.0*	212.0*	228.0*
	24.0	70.0	106.0	143.0*	179.0*	196.0*	210.0*
	26.0	61.0	94.0	126.0	159.0*	181.0*	195.0*
	28.0	53.0	83.0	113.0	143.0*	168.0*	181.0*
	30.0	47.0	74.0	102.0	129.0	157.0*	169.0*
	34.0	37.0	61.0	84.0	108.0	132.0	148.0*
	38.0	29.0	50.0	71.0	92.0	113.0	132.0
	42.0	23.0	42.0	61.0	79.0	98.0	116.0
	46.0	18.0	36.0	53.0	69.0	86.0	103.0
	50.0	14.0	30.0	46.0	61.0	76.0	92.0
	54.0	11.0	26.0	41.0	54.0	68.0	82.0
	58.0	9.0	22.0	36.0	49.0	62.0	75.0
78 m	10.0	-	19.0	32.0	44.0	56.0	68.0
	12.0	230.0*	230.0*	230.0*	-	-	-
	14.0	179.0*	230.0*	230.0*	-	-	-
	16.0	140.0*	205.0*	230.0*	230.0*	-	-
	18.0	114.0	168.0*	212.0*	230.0*	230.0*	-
	20.0	95.0	141.0*	188.0*	213.0*	230.0*	-
	22.0	80.0	121.0	162.0*	194.0*	210.0*	226.0*
	24.0	69.0	105.0	142.0*	177.0*	193.0*	208.0*
	26.0	59.0	92.0	125.0	158.0*	179.0*	192.0*
	28.0	52.0	82.0	112.0	142.0*	166.0*	179.0*
	30.0	46.0	73.0	101.0	128.0	155.0*	167.0*
	34.0	35.0	59.0	83.0	107.0	130.0	146.0*
	38.0	28.0	49.0	70.0	91.0	111.0	130.0
	42.0	21.0	41.0	60.0	78.0	97.0	115.0
	46.0	17.0	34.0	51.0	68.0	85.0	101.0
	50.0	13.0	29.0	45.0	60.0	75.0	90.0
	54.0	9.0	24.0	39.0	53.0	67.0	81.0
	58.0	-	20.0	34.0	47.0	60.0	73.0
	62.0	-	17.0	30.0	42.0	54.0	66.0
	66.0	-	15.0	26.0	38.0	49.0	61.0
	70.0	-	12.0	23.0	35.0	45.0	56.0

*: Double hook block required

MB	m	superlift					
		0t	50t	100t	150t	200t	250t
		t	t	t	t	t	t
84 m	12.0	203.0*	203.0*	-	-	-	-
	14.0	179.0*	203.0*	203.0*	-	-	-
	16.0	140.0*	203.0*	203.0*	203.0*	-	-
	18.0	114.0	167.0*	203.0*	203.0*	-	-
	20.0	94.0	141.0*	187.0*	203.0*	203.0*	-
	22.0	80.0	121.0*	161.0*	193.0*	203.0*	-
	24.0	68.0	105.0	141.0*	176.0*	192.0*	201.0*
	26.0	59.0	92.0	125.0*	158.0*	178.0*	191.0*
	28.0	52.0	81.0	111.0	141.0*	165.0*	178.0*
	30.0	45.0	73.0	100.0	128.0*	153.0*	166.0*
	34.0	35.0	59.0	83.0	106.0	130.0*	145.0*
	38.0	27.0	49.0	69.0	90.0	111.0	129.0*
	42.0	21.0	40.0	59.0	77.0	96.0	114.0
	46.0	16.0	34.0	51.0	67.0	84.0	101.0
	50.0	12.0	28.0	44.0	59.0	74.0	89.0
	54.0	9.0	23.0	38.0	52.0	66.0	80.0
	58.0	-	20.0	33.0	46.0	59.0	72.0
	62.0	-	16.0	29.0	42.0	54.0	65.0
	66.0	-	13.0	25.0	37.0	49.0	60.0
90 m	70.0	-	11.0	22.0	33.0	44.0	55.0
	74.0	-	9.0	20.0	30.0	40.0	50.0
	12.0	180.0*	180.0*	-	-	-	-
	14.0	176.0*	180.0*	180.0*	-	-	-
	16.0	139.0*	180.0*	180.0*	-	-	-
	18.0	113.0*	167.0*	179.0*	180.0*	-	-
	20.0	93.0	140.0*	176.0*	178.0*	-	-
	22.0	79.0	120.0*	161.0*	175.0*	175.0*	-
	24.0	67.0	104.0	140.0*	171.0*	171.0*	-
	26.0	58.0	91.0	124.0*	157.0*	167.0*	-
	28.0	50.0	80.0	110.0*	140.0*	163.0*	163.0*
	30.0	44.0	72.0	99.0	127.0*	151.0*	158.0*
	34.0	34.0	58.0	82.0	105.0	129.0*	143.0*
	38.0	26.0	47.0	68.0	89.0	110.0*	127.0*
	42.0	19.0	39.0	58.0	76.0	95.0	113.0*
	46.0	14.0	32.0	50.0	66.0	83.0	99.0
	50.0	10.0	27.0	43.0	58.0	73.0	88.0
	54.0	-	22.0	37.0	51.0	65.0	79.0
	58.0	-	18.0	32.0	45.0	58.0	71.0
	62.0	-	15.0	27.0	40.0	52.0	64.0
	66.0	-	12.0	24.0	36.0	47.0	58.0
	70.0	-	9.0	20.0	32.0	43.0	53.0
	74.0	-	-	18.0	28.0	39.0	49.0
	78.0	-	-	15.0	25.0	35.0	45.0




TEREX TC 3200 H



Lifting capacities
Capacités

500 TON

Tragfähigkeiten
Capacités



HSSL/LSL



MB	m	superlift						
		0t	50t	100t	150t	175t	200t	225t
108 m	16.0	120.0*	-	-	-	-	-	-
	18.0	120.0*	-	-	-	-	-	-
	20.0	120.0*	-	-	-	-	-	-
	22.0	109.0*	120.0*	-	-	-	-	-
	24.0	95.0*	120.0*	-	-	-	-	-
	26.0	84.0*	115.0*	-	-	-	-	-
	28.0	74.0*	104.0*	120.0*	-	-	-	-
	30.0	66.0	94.0*	116.0*	-	-	-	-
	34.0	54.0	78.0*	97.0*	114.0*	-	-	-
	38.0	44.0	66.0	83.0*	100.0*	107.0*	-	-
	42.0	36.0	56.0	72.0*	87.0*	94.0*	100.0*	-
	46.0	30.0	47.0	63.0	77.0*	83.0*	90.0*	94.0*
	50.0	24.0	41.0	56.0	68.0	74.0*	80.0*	86.0*
	54.0	20.0	35.0	49.0	61.0	66.0	72.0*	78.0*
	58.0	16.0	30.0	44.0	54.0	60.0	65.0	70.0
	62.0	13.0	26.0	39.0	49.0	54.0	59.0	64.0
	66.0	10.0	22.0	34.0	44.0	49.0	54.0	58.0
	70.0	8.0	19.0	31.0	40.0	45.0	49.0	53.0
	74.0	6.0	16.0	27.0	37.0	41.0	45.0	49.0
	78.0	-	14.0	24.0	34.0	37.0	41.0	45.0
	82.0	-	12.0	21.0	31.0	34.0	38.0	41.0

MB	m	superlift						
		0t	50t	100t	150t	175t	200t	225t
120 m	18.0	90.0*	-	-	-	-	-	-
	20.0	90.0*	-	-	-	-	-	-
	22.0	88.0*	-	-	-	-	-	-
	24.0	85.0*	-	-	-	-	-	-
	26.0	82.0*	-	-	-	-	-	-
	28.0	72.0*	80.0*	-	-	-	-	-
	30.0	64.0	77.0*	-	-	-	-	-
	34.0	51.0	72.0*	-	-	-	-	-
	38.0	41.0	64.0	68.0	-	-	-	-
	42.0	34.0	53.0	64.0	-	-	-	-
	46.0	27.0	45.0	60.0	-	-	-	-
	50.0	22.0	38.0	54.0	57.0	-	-	-
	54.0	18.0	33.0	48.0	54.0	-	-	-
	58.0	14.0	28.0	42.0	51.0	-	-	-
	62.0	11.0	24.0	37.0	47.0	-	-	-
	66.0	8.0	20.0	32.0	43.0	46.0	-	-
	70.0	5.0	17.0	28.0	39.0	43.0	-	-
	74.0	-	14.0	25.0	35.0	39.0	-	-
	78.0	-	12.0	22.0	32.0	36.0	-	-
	82.0	-	9.0	19.0	29.0	33.0	-	-

*: Double hook block required




TEREX TC 3200 H

Working ranges
Portées

500 TON

Arbeitsbereiche
Werkbereich

HSW

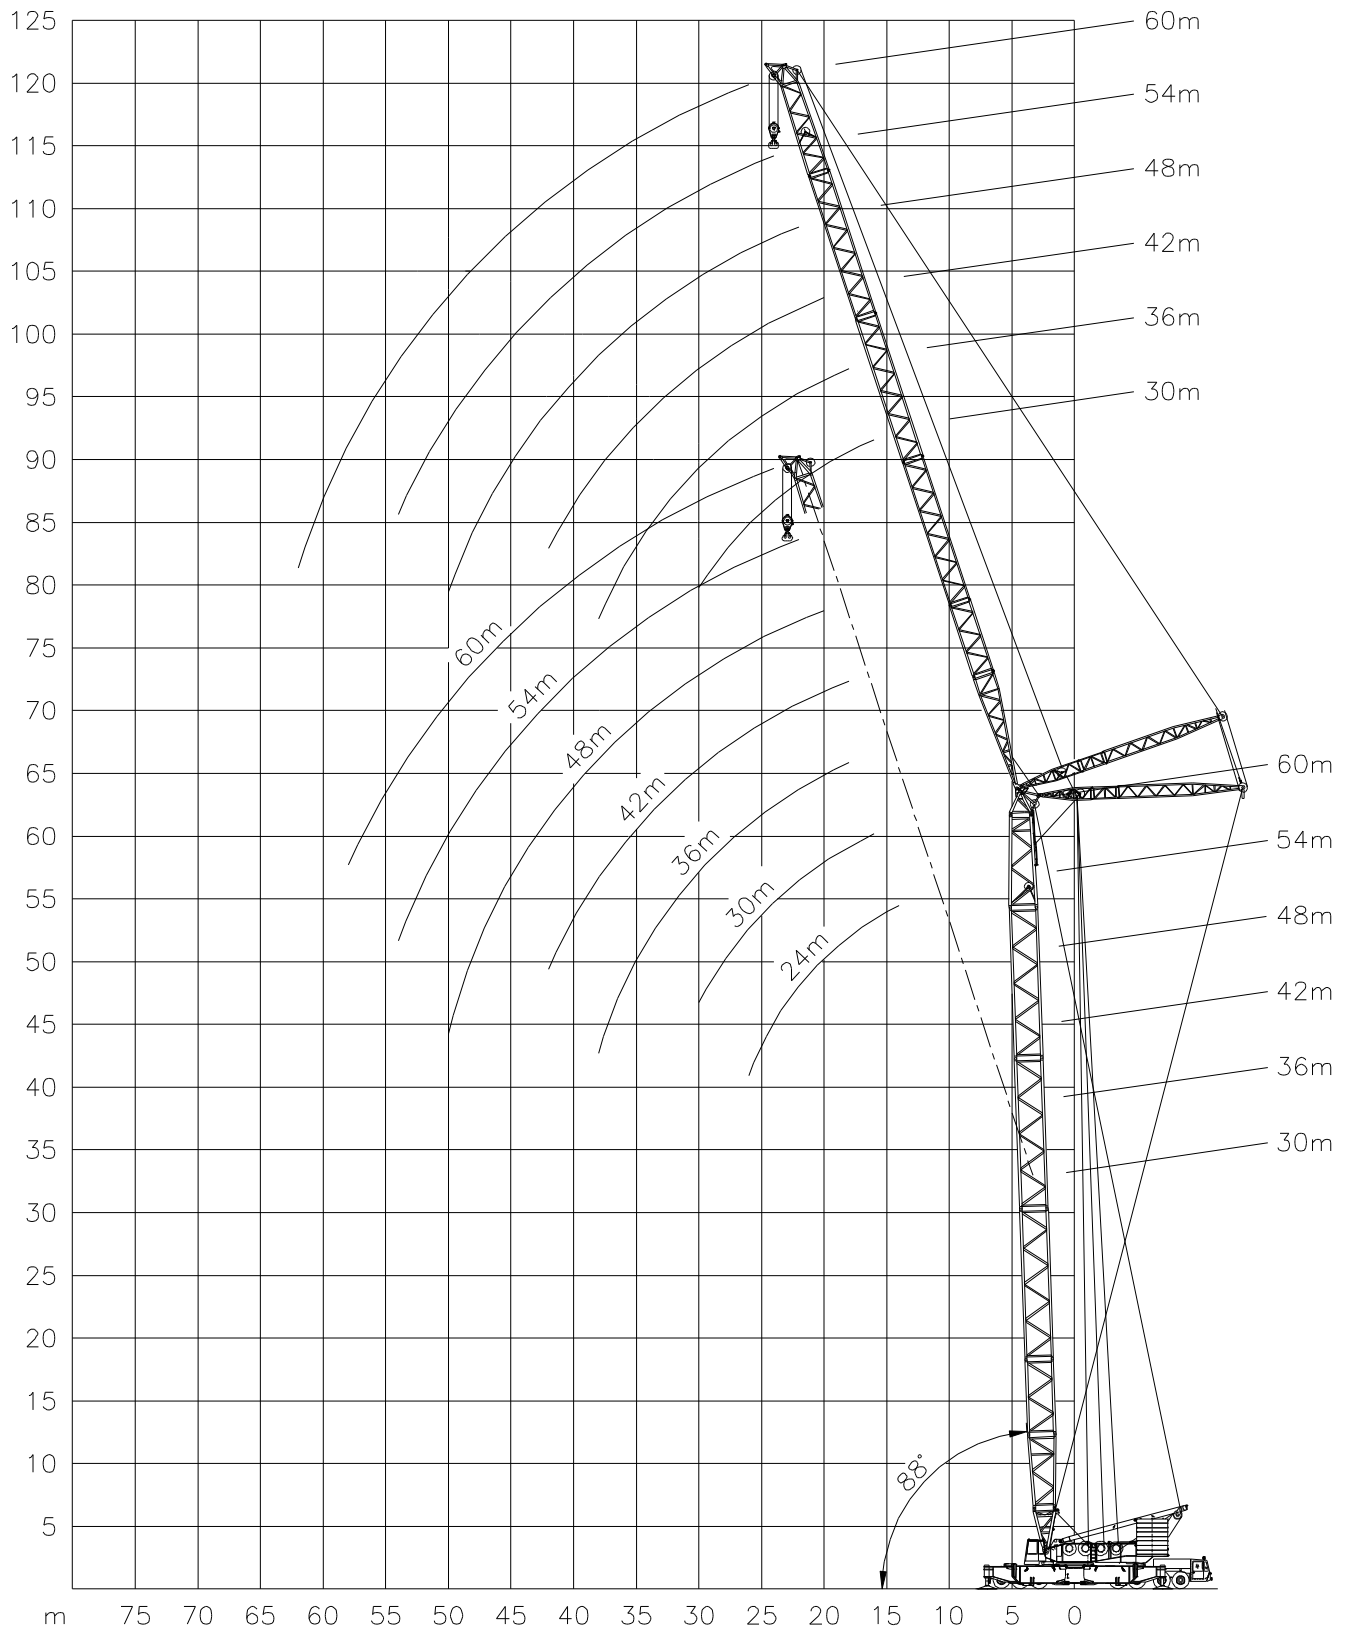




TEREX TC 3200 H


Lifting capacities
Capacités

500 TON

Tragfähigkeiten
Capacités



HSW-88°



MB	m	JIB						
		24m	30m	36m	42m	48m	54m	60m
		t	t	t	t	t	t	t
30 m	14.0	228.0*	-	-	-	-	-	-
	16.0	192.0*	191.0*	-	-	-	-	-
	18.0	165.0*	164.0*	165.0*	147.0*	-	-	-
	20.0	145.0*	143.0*	144.0*	142.0	123.0	-	-
	22.0	128.0	127.0	127.0	126.0	121.0	104.0	-
	24.0	115.0	114.0	114.0	112.0	112.0	102.0	88.0
	26.0	104.0	103.0	103.0	101.0	101.0	100.0	87.0
	28.0	-	93.0	93.0	92.0	92.0	91.0	85.0
	30.0	-	85.0	85.0	84.0	84.0	83.0	83.0
	34.0	-	-	71.0	70.0	70.0	69.0	69.0
	38.0	-	-	61.0	60.0	59.0	58.0	58.0
	42.0	-	-	-	52.0	51.0	50.0	50.0
	46.0	-	-	-	-	45.0	44.0	44.0
	50.0	-	-	-	-	40.0	38.0	38.0
36 m	14.0	212.0*	-	-	-	-	-	-
	16.0	189.0*	182.0*	-	-	-	-	-
	18.0	162.0*	161.0*	155.0*	-	-	-	-
	20.0	142.0	141.0	141.0	132.0	115.0	-	-
	22.0	126.0	125.0	125.0	123.0	112.0	97.0	-
	24.0	113.0	111.0	111.0	110.0	109.0	95.0	81.0
	26.0	102.0	101.0	101.0	99.0	99.0	93.0	81.0
	28.0	-	91.0	91.0	90.0	90.0	89.0	79.0
	30.0	-	84.0	84.0	82.0	82.0	81.0	78.0
	34.0	-	-	71.0	69.0	69.0	68.0	68.0
	38.0	-	-	61.0	60.0	59.0	58.0	58.0
	42.0	-	-	-	51.0	51.0	50.0	50.0
	46.0	-	-	-	-	45.0	44.0	44.0
	50.0	-	-	-	-	39.0	38.0	38.0
42 m	14.0	194.0*	-	-	-	-	-	-
	16.0	180.0*	167.0*	-	-	-	-	-
	18.0	160.0*	157.0*	143.0*	-	-	-	-
	20.0	140.0	138.0	137.0	122.0	106.0	-	-
	22.0	124.0	122.0	122.0	118.0	104.0	90.0	-
	24.0	111.0	109.0	109.0	108.0	102.0	88.0	75.0
	26.0	100.0	99.0	99.0	97.0	97.0	87.0	75.0
	28.0	-	90.0	90.0	88.0	88.0	85.0	74.0
	30.0	-	82.0	82.0	81.0	81.0	79.0	72.0
	34.0	-	-	70.0	68.0	68.0	67.0	67.0
	38.0	-	-	60.0	58.0	58.0	57.0	57.0
	42.0	-	-	-	51.0	51.0	49.0	50.0
	46.0	-	-	-	-	44.0	43.0	43.0
	50.0	-	-	-	-	39.0	38.0	38.0
	54.0	-	-	-	-	-	33.0	33.0
	58.0	-	-	-	-	-	-	30.0
	62.0	-	-	-	-	-	-	26.0

MB	m	JIB						
		24m	30m	36m	42m	48m	54m	60m
		t	t	t	t	t	t	t
48 m	14.0	172.0*	-	-	-	-	-	-
	16.0	160.0*	147.0*	-	-	-	-	-
	18.0	150.0*	138.0	125.0	-	-	-	-
	20.0	138.0	131.0	119.0	108.0	-	-	-
	22.0	122.0	120.0	113.0	104.0	93.0	80.0	-
	24.0	109.0	108.0	108.0	100.0	90.0	79.0	68.0
	26.0	98.0	97.0	97.0	96.0	88.0	78.0	68.0
	28.0	-	88.0	88.0	87.0	85.0	76.0	67.0
	30.0	-	80.0	81.0	79.0	79.0	74.0	65.0
	34.0	-	-	68.0	67.0	67.0	65.0	63.0
	38.0	-	-	59.0	57.0	57.0	56.0	56.0
	42.0	-	-	-	50.0	50.0	48.0	49.0
	46.0	-	-	-	-	43.0	42.0	42.0
	50.0	-	-	-	-	38.0	37.0	37.0
54 m	14.0	152.0*	-	-	-	-	-	-
	16.0	142.0	129.0	-	-	-	-	-
	18.0	133.0	121.0	110.0	-	-	-	-
	20.0	125.0	115.0	103.0	96.0	-	-	-
	22.0	119.0	110.0	99.0	91.0	83.0	-	-
	24.0	107.0	105.0	95.0	88.0	81.0	72.0	62.0
	26.0	97.0	95.0	91.0	85.0	78.0	70.0	62.0
	28.0	-	86.0	87.0	82.0	75.0	68.0	60.0
	30.0	-	79.0	79.0	78.0	73.0	66.0	59.0
	34.0	-	-	67.0	65.0	65.0	63.0	57.0
	38.0	-	-	58.0	56.0	56.0	55.0	54.0
	42.0	-	-	-	49.0	49.0	47.0	48.0
	46.0	-	-	-	-	42.0	41.0	41.0
	50.0	-	-	-	-	37.0	36.0	36.0
60 m	14.0	142.0	129.0	-	-	-	-	-
	16.0	133.0	121.0	110.0	-	-	-	-
	18.0	125.0	115.0	103.0	96.0	-	-	-
	20.0	119.0	110.0	99.0	91.0	83.0	-	-
	22.0	107.0	105.0	95.0	88.0	81.0	72.0	62.0
	24.0	97.0	95.0	91.0	85.0	78.0	70.0	62.0
	26.0	-	86.0	87.0	82.0	75.0	68.0	60.0
	28.0	-	79.0	79.0	78.0	73.0	66.0	59.0
	30.0	-	-	67.0	65.0	65.0	63.0	57.0
	34.0	-	-	58.0	56.0	56.0	55.0	54.0
	38.0	-	-	-	49.0	49.0	47.0	48.0
	42.0	-	-	-	-	42.0	41.0	41.0
	46.0	-	-	-	-	37.0	36.0	36.0
	50.0	-	-	-	-	32.0	32.0	32.0
	54.0	-	-	-	-	-	28.0	28.0
	58.0	-	-	-	-	-	-	25.0
60 m	16.0	-	110.0	-	-	-	-	-
	18.0	-	106.0	101.0	-	-	-	-
	20.0	-	101.0	97.0	91.0	-	-	-
	22.0	-	96.0	91.0	85.0	78.0	-	-
	24.0	-	92.0	86.0	80.0	73.0	66.0	-
	26.0	-	88.0	81.0	76.0	69.0	63.0	56.0
	28.0	-	85.0	78.0	72.0	66.0	61.0	55.0
	30.0	-	78.0	75.0	70.0	64.0	59.0	53.0
	34.0	-	-	66.0	64.0	60.0	56.0	51.0
	38.0	-	-	57.0	55.0	55.0	53.0	49.0
	42.0	-	-	-	48.0	48.0	46.0	46.0
	46.0	-	-	-	-	42.0	40.0	40.0
	50.0	-	-	-	-	37.0	35.0	35.0
	54.0	-	-	-	-	-	31.0	31.0
	58.0	-	-	-	-	-	-	28.0
	62.0	-	-	-	-	-	-	25.0

*: Double hook block required




TEREX TC 3200 H

Working ranges
Portées

500 TON

Arbeitsbereiche
Werkbereich

HSWSL 85°

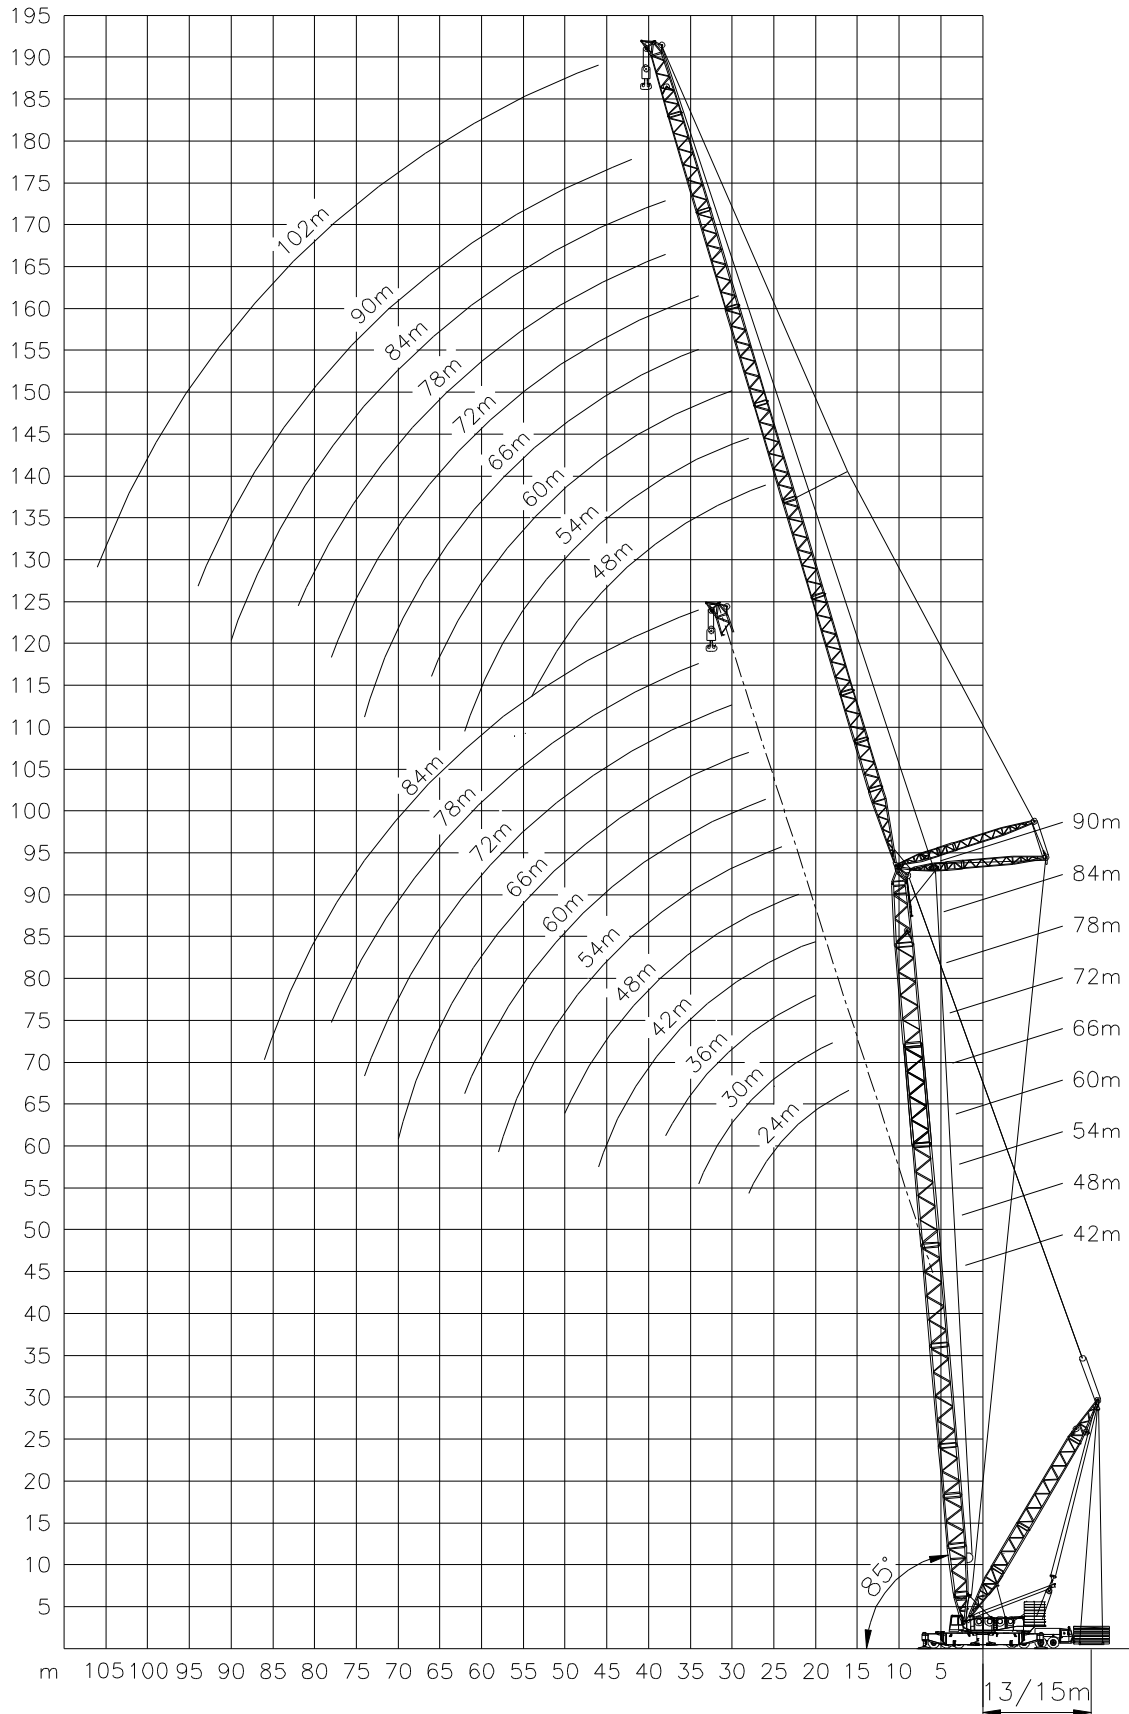




TEREX TC 3200 H



Lifting capacities
Capacités

500 TON

Tragfähigkeiten
Capacités



HSWSL-85°



MB	JIB	m	superlift					
			0t	50t	100t	150t	175t	200t
42 m	24 m	16.0	184.0*	224.0*	255.0*	270.0*	-	-
		18.0	158.0*	197.0*	225.0*	251.0*	251.0*	-
		20.0	138.0	175.0*	201.0*	226.0*	237.0*	247.0*
		22.0	122.0	156.0*	181.0*	203.0*	215.0*	225.0*
		24.0	109.0	140.0	164.0*	185.0*	196.0*	206.0*
		26.0	99.0	127.0	150.0*	170.0*	180.0*	189.0*
	30 m	28.0	90.0	116.0	139.0	157.0*	166.0*	170.0*
		18.0	157.0*	195.0*	217.0*	217.0*	-	-
		20.0	137.0*	174.0*	199.0*	214.0*	214.0*	-
		22.0	121.0	155.0*	179.0*	202.0*	212.0*	-
		24.0	108.0	139.0*	163.0*	184.0*	194.0*	204.0*
		26.0	97.0	126.0	149.0*	168.0*	178.0*	188.0*
	36 m	28.0	88.0	115.0	137.0*	155.0*	164.0*	173.0*
		30.0	81.0	106.0	127.0	143.0*	152.0*	159.0*
		34.0	68.0	91.0	110.0	126.0	133.0*	-
		20.0	138.0*	174.0*	183.0*	183.0*	-	-
		22.0	122.0*	156.0*	179.0*	182.0*	-	-
		24.0	109.0	140.0*	163.0*	181.0*	181.0*	-
	42 m	26.0	98.0	127.0*	149.0*	168.0*	177.0*	179.0*
		28.0	89.0	116.0	137.0*	155.0*	164.0*	173.0*
		30.0	81.0	106.0	127.0*	143.0*	152.0*	160.0*
		34.0	69.0	91.0	110.0	123.0*	132.0*	137.0*
		38.0	59.0	79.0	96.0	110.0	117.0	118.0*
		20.0	136.0*	156.0*	156.0*	-	-	-
	48 m	22.0	120.0*	155.0*	156.0*	-	-	-
		24.0	107.0*	139.0*	155.0*	155.0*	-	-
		26.0	96.0	126.0*	147.0*	155.0*	155.0*	-
		28.0	87.0	114.0*	136.0*	153.0*	154.0*	-
		30.0	79.0	105.0	126.0*	142.0*	150.0*	153.0*
		34.0	67.0	90.0	109.0*	124.0*	131.0*	139.0*
	54 m	38.0	58.0	78.0	95.0	109.0*	116.0*	122.0*
		42.0	50.0	69.0	84.0	98.0	103.0	107.0*
		46.0	44.0	61.0	75.0	87.0	-	-
		22.0	121.0*	132.0*	132.0*	-	-	-
		24.0	108.0*	132.0*	132.0*	-	-	-
		26.0	97.0	127.0*	132.0*	-	-	-
	60 m	28.0	88.0	115.0*	132.0*	132.0*	-	-
		30.0	80.0	106.0*	125.0*	132.0*	132.0*	-
		34.0	67.0	90.0	109.0*	123.0*	130.0*	131.0*
		38.0	58.0	78.0	95.0	109.0*	115.0*	122.0*
		42.0	50.0	69.0	84.0	97.0	103.0	108.0*
		46.0	44.0	61.0	75.0	87.0	93.0	95.0
42 m	24 m	50.0	38.0	55.0	68.0	79.0	82.0	-
		24.0	106.0*	113.0*	113.0*	-	-	-
		26.0	95.0*	113.0*	113.0*	-	-	-
		28.0	86.0	113.0*	113.0*	-	-	-
		30.0	78.0	105.0*	112.0*	112.0*	-	-
		34.0	66.0	89.0	107.0*	109.0*	-	-
	30 m	38.0	56.0	77.0	94.0*	104.0*	-	-
		42.0	48.0	68.0	83.0	96.0*	98.0*	-
		46.0	42.0	60.0	74.0	86.0	91.0	-
		50.0	37.0	54.0	67.0	78.0	83.0	-
		54.0	33.0	49.0	60.0	71.0	74.0	-
		58.0	29.0	44.0	54.0	62.0	-	-
	36 m	26.0	93.0*	95.0*	95.0*	-	-	-
		28.0	84.0	95.0*	95.0*	-	-	-
		30.0	77.0	95.0*	95.0*	-	-	-
		34.0	65.0	88.0	93.0*	-	-	-
		38.0	55.0	76.0	88.0	-	-	-
		42.0	48.0	67.0	82.0	-	-	-
	42 m	46.0	42.0	60.0	73.0	-	-	-
		50.0	37.0	53.0	66.0	-	-	-
		54.0	32.0	48.0	60.0	-	-	-
		58.0	29.0	44.0	54.0	-	-	-
		62.0	26.0	40.0	50.0	-	-	-
		62.0	26.0	40.0	50.0	-	-	-

MB	JIB	m	superlift					
			0t	50t	100t	150t	175t	200t
42 m	66 m	28.0	79.0	79.0	79.0	-	-	-
		30.0	75.0	79.0	79.0	-	-	-
		34.0	63.0	79.0	79.0	-	-	-
		38.0	54.0	75.0	77.0	-	-	-
		42.0	46.0	66.0	75.0	75.0	-	-
		46.0	40.0	58.0	72.0	72.0	-	-
	72 m	50.0	35.0	52.0	65.0	69.0	-	-
		54.0	31.0	47.0	58.0	65.0	-	-
		58.0	27.0	42.0	53.0	61.0	-	-
		62.0	24.0	38.0	49.0	57.0	-	-
		66.0	21.0	35.0	45.0	52.0	-	-
		70.0	19.0	32.0	38.0	44.0	-	-
	78 m	30.0	66.0	66.0	-	-	-	-
		34.0	63.0	66.0	66.0	-	-	-
		38.0	54.0	66.0	66.0	-	-	-
		42.0	46.0	65.0	65.0	-	-	-
		46.0	40.0	58.0	65.0	65.0	-	-
		50.0	35.0	52.0	64.0	65.0	-	-
	84 m	54.0	31.0	47.0	58.0	64.0	-	-
		58.0	27.0	42.0	53.0	63.0	-	-
		62.0	24.0	38.0	48.0	58.0	-	-
		66.0	21.0	34.0	44.0	53.0	-	-
		70.0	19.0	31.0	41.0	48.0	-	-
		74.0	16.0	28.0	38.0	42.0	-	-
42 m	84 m	34.0	54.0	54.0	-	-	-	-
		38.0	53.0	54.0	54.0	-	-	-
		42.0	45.0	54.0	54.0	-	-	-
		46.0	39.0	53.0	53.0	-	-	-
		50.0	34.0	51.0	53.0	53.0	-	-
		54.0	30.0	46.0	53.0	53.0	-	-
	90 m	58.0	26.0	41.0	52.0	52.0	-	-
		62.0	23.0	37.0	48.0	52.0	-	-
		66.0	20.0	33.0	44.0	51.0	-	-
		70.0	18.0	30.0	40.0	48.0	-	-
		74.0	15.0	27.0	37.0	44.0	-	-
		78.0	13.0	25.0	33.0	38.0	-	-
42 m	90 m	34.0	46.0	46.0	-	-	-	-
		38.0	46.0	46.0	-	-	-	-
		42.0	45.0	45.0	45.0	-	-	-
		46.0	39.0	44.0	44.0	-	-	-
		50.0	34.0	44.0	44.0	-	-	-
		54.0	29.0	43.0	43.0	-	-	-
	96 m	58.0	26.0	41.0	43.0	-	-	-
		62.0	22.0	37.0	43.0	-	-	-
		66.0	20.0	33.0	43.0	-	-	-
		70.0	17.0	30.0	40.0	42.0	-	-
		74.0	15.0	27.0	37.0	41.0	-	-
		78.0	13.0	24.0	34.0	40.0	-	-
42 m	96 m	82.0	11.0	22.0	31.0	36.0	-	-
		86.0	10.0	20.0	29.0	31.0	-	-
		18.0	155.0*	189.0*	189.0*	-	-	-
		20.0	135.0*	172.0*	189.0*	189.0*	-	-
		22.0	120.0*	154.0*	178.0*	187.0*	187.0*	-
		24.0	107.0	138.0*	161.0*	182.0*	184.0*	-
	102 m	26.0	96.0	125.0*	148.0*	167.0*	177.0*	181.0*
		28.0	87.0	114.0	136.0*	154.0*	163.0*	172.0*
		30.0	80.0	105.0	126.0*	143.0*	151.0*	160.0*
		34.0	67.0	90.0	109.0	124.0*	132.0*	136.0*
		38.0	56.0	77.0	94.0*	104.0*	-	-
		42.0	48.0	68.0	83.0	96.0*	98.0*	-

*: Double hook block required




TEREX TC 3200 H


Lifting capacities
Capacités

500 TON

Tragfähigkeiten
Capacités



HSWSL-85°



MB	JIB	m	superlift					
			0t	50t	100t	150t	175t	200t
			t	t	t	t	t	t
48 m	36 m	20.0	136.0*	161.0*	161.0*	-	-	-
		22.0	120.0*	155.0*	161.0*	-	-	-
		24.0	107.0*	139.0*	160.0*	-	-	-
		26.0	97.0	126.0*	148.0*	158.0*	158.0*	-
		28.0	88.0	115.0*	136.0*	154.0*	156.0*	-
		30.0	80.0	106.0*	126.0*	142.0*	150.0*	153.0*
		34.0	68.0	90.0	109.0*	124.0*	131.0*	139.0*
		38.0	58.0	79.0	96.0	110.0*	116.0*	119.0*
	42 m	22.0	119.0*	139.0*	139.0*	-	-	-
		24.0	106.0*	138.0*	139.0*	-	-	-
		26.0	95.0	125.0*	138.0*	138.0*	-	-
		28.0	86.0	114.0*	135.0*	137.0*	-	-
		30.0	78.0	104.0	124.0*	135.0*	135.0*	-
		34.0	66.0	89.0	108.0*	122.0*	130.0*	132.0*
		38.0	57.0	77.0	94.0	108.0*	115.0*	121.0*
		42.0	49.0	68.0	84.0	96.0	103.0	108.0*
	48 m	24.0	107.0*	119.0*	119.0*	-	-	-
		26.0	96.0*	119.0*	119.0*	-	-	-
		28.0	87.0	115.0*	118.0*	-	-	-
		30.0	79.0	105.0*	118.0*	118.0*	-	-
		34.0	66.0	90.0	108.0*	116.0*	116.0*	-
		38.0	57.0	78.0	95.0*	108.0*	113.0*	-
		42.0	49.0	68.0	84.0	96.0*	102.0*	-
		46.0	43.0	61.0	75.0	86.0	92.0	-
	54 m	26.0	94.0*	103.0*	103.0*	-	-	-
		28.0	85.0	103.0*	103.0*	-	-	-
		30.0	77.0	102.0*	102.0*	-	-	-
		34.0	65.0	89.0	100.0*	100.0*	-	-
		38.0	55.0	77.0	93.0*	97.0*	-	-
		42.0	48.0	67.0	83.0	92.0	-	-
		46.0	41.0	60.0	74.0	85.0	-	-
		50.0	36.0	53.0	66.0	77.0	-	-
	60 m	28.0	83.0*	87.0*	87.0*	-	-	-
		30.0	76.0	87.0*	87.0*	-	-	-
		34.0	64.0	87.0*	87.0*	-	-	-
		38.0	55.0	76.0	84.0*	-	-	-
		42.0	47.0	67.0	79.0	-	-	-
		46.0	41.0	59.0	73.0	-	-	-
		50.0	36.0	53.0	65.0	-	-	-
		54.0	32.0	48.0	59.0	-	-	-
	66 m	28.0	74.0	74.0	-	-	-	-
		30.0	74.0	74.0	74.0	-	-	-
		34.0	62.0	74.0	74.0	-	-	-
		38.0	53.0	73.0	73.0	-	-	-
		42.0	46.0	65.0	72.0	72.0	-	-
		46.0	40.0	58.0	69.0	69.0	-	-
		50.0	35.0	52.0	64.0	67.0	-	-
		54.0	30.0	47.0	58.0	63.0	-	-
	70.0	58.0	27.0	42.0	53.0	60.0	-	-
		62.0	24.0	38.0	48.0	56.0	-	-
		66.0	21.0	34.0	44.0	53.0	-	-
		70.0	19.0	31.0	41.0	45.0	-	-

MB	JIB	m	superlift					
			0t	50t	100t	150t	175t	200t
			t	t	t	t	t	t
48 m	72 m	30.0	62.0	62.0	-	-	-	-
		34.0	62.0	62.0	62.0	-	-	-
		38.0	53.0	62.0	62.0	-	-	-
		42.0	45.0	62.0	62.0	-	-	-
		46.0	39.0	58.0	62.0	62.0	-	-
		50.0	34.0	51.0	61.0	61.0	-	-
		54.0	30.0	46.0	58.0	61.0	-	-
		58.0	26.0	42.0	53.0	60.0	-	-
	78 m	62.0	23.0	37.0	48.0	57.0	-	-
		66.0	20.0	34.0	44.0	53.0	-	-
		70.0	18.0	31.0	41.0	49.0	-	-
		74.0	16.0	28.0	37.0	42.0	-	-
	84 m	34.0	51.0	51.0	-	-	-	-
		38.0	51.0	51.0	51.0	-	-	-
		42.0	44.0	51.0	51.0	-	-	-
		46.0	38.0	51.0	51.0	-	-	-
		50.0	33.0	50.0	50.0	50.0	-	-
		54.0	29.0	45.0	50.0	50.0	-	-
		58.0	25.0	41.0	50.0	50.0	-	-
		62.0	22.0	36.0	47.0	49.0	-	-
	88 m	66.0	19.0	33.0	43.0	48.0	-	-
		70.0	17.0	29.0	40.0	47.0	-	-
		74.0	15.0	27.0	37.0	44.0	-	-
		78.0	13.0	24.0	33.0	39.0	-	-
		82.0	11.0	22.0	31.0	33.0	-	-
		86.0	9.0	19.0	28.0	31.0	-	-
	# 24 m	16.0	176.0*	176.0*	176.0*	-	-	-
		18.0	167.0*	176.0*	176.0*	-	-	-
		20.0	146.0*	176.0*	176.0*	-	-	-
		22.0	129.0*	161.0*	168.0*	-	-	-
		24.0	115.0*	144.0*	159.0*	-	-	-
		26.0	104.0	131.0*	151.0*	-	-	-
		28.0	94.0	120.0*	142.0*	-	-	-
		30.0	86.0	110.0	131.0*	-	-	-
	# 30 m	18.0	155.0*	155.0*	155.0*	-	-	-
		20.0	144.0*	155.0*	155.0*	-	-	-
		22.0	127.0*	155.0*	155.0*	-	-	-
		24.0	114.0*	143.0*	150.0*	-	-	-
		26.0	102.0*	130.0*	142.0*	-	-	-
		28.0	93.0	118.0*	135.0*	-	-	-
		30.0	85.0	109.0*	128.0*	-	-	-
		34.0	72.0	93.0	112.0	-	-	-
	36 m	20.0	135.0*	144.0*	144.0*	-	-	-
		22.0	119.0*	144.0*	144.0*	-	-	-
		24.0	106.0*	138.0*	141.0*	-	-	-
		26.0	95.0	125.0*	139.0*	139.0*	-	-
		28.0	87.0	114.0*	135.0*	136.0*	-	-
		30.0	79.0	105.0	125.0*	134.0*	134.0*	-
		34.0	67.0	90.0	108.0*	123.0*	128.0*	-
		42.0	50.0	69.0	84.0	97.0	103.0	-

*: Double hook block required

#: Short luffing jibs : min. weight of hook block : 5.5t




TEREX TC 3200 H



Lifting capacities
Capacités

500 TON

Tragfähigkeiten
Capacités



HSWSL-85°



MB	JIB	m	superlift					
			0t	50t	100t	150t	175t	200t
			t	t	t	t	t	t
54 m	42 m	22.0	117.0*	125.0*	125.0*	-	-	-
		24.0	104.0*	125.0*	125.0*	-	-	-
		26.0	94.0*	123.0*	123.0*	-	-	-
		28.0	85.0	113.0*	121.0*	121.0*	-	-
		30.0	77.0	103.0*	119.0*	119.0*	-	-
		34.0	65.0	88.0	107.0*	116.0*	-	-
		38.0	56.0	77.0	94.0*	107.0*	112.0*	-
		42.0	48.0	68.0	83.0	95.0*	102.0*	-
	48 m	46.0	42.0	60.0	74.0	86.0	92.0	-
		24.0	105.0*	106.0*	106.0*	-	-	-
		26.0	95.0*	106.0*	106.0*	-	-	-
		28.0	86.0	106.0*	106.0*	-	-	-
		30.0	78.0	104.0*	105.0*	-	-	-
		34.0	65.0	89.0	103.0*	103.0*	-	-
		38.0	56.0	77.0	94.0*	101.0*	-	-
		42.0	48.0	68.0	83.0	95.0*	-	-
	54 m	46.0	42.0	60.0	74.0	86.0	-	-
		50.0	37.0	54.0	67.0	78.0	-	-
		26.0	93.0*	93.0*	93.0*	-	-	-
		28.0	84.0*	93.0*	93.0*	-	-	-
		30.0	76.0	93.0*	93.0*	-	-	-
		34.0	64.0	88.0*	92.0*	92.0*	-	-
		38.0	54.0	76.0	89.0*	89.0*	-	-
		42.0	47.0	67.0	82.0*	85.0*	-	-
	60 m	46.0	41.0	59.0	73.0	81.0*	-	-
		50.0	35.0	53.0	66.0	76.0	-	-
		54.0	31.0	48.0	59.0	70.0	-	-
		58.0	28.0	43.0	54.0	64.0	-	-
		28.0	81.0*	81.0*	81.0*	-	-	-
		30.0	75.0	81.0*	81.0*	-	-	-
		34.0	63.0	81.0*	81.0*	-	-	-
		38.0	54.0	75.0	79.0	79.0	-	-
	66 m	42.0	46.0	66.0	76.0	76.0	-	-
		46.0	40.0	59.0	71.0	71.0	-	-
		50.0	35.0	52.0	65.0	66.0	-	-
		54.0	31.0	47.0	59.0	61.0	-	-
		58.0	28.0	43.0	54.0	56.0	-	-
		62.0	25.0	39.0	49.0	52.0	-	-
		70.0	18.0	30.0	40.0	46.0	-	-
		74.0	16.0	27.0	37.0	43.0	-	-
	72 m	34.0	59.0	59.0	59.0	-	-	-
		38.0	52.0	59.0	59.0	-	-	-
		42.0	45.0	59.0	59.0	-	-	-
		46.0	38.0	57.0	58.0	58.0	-	-
		50.0	33.0	51.0	58.0	58.0	-	-
		54.0	29.0	46.0	57.0	57.0	-	-
		58.0	26.0	41.0	52.0	56.0	-	-
		62.0	23.0	37.0	48.0	55.0	-	-

MB	JIB	m	superlift					
			0t	50t	100t	150t	175t	200t
			t	t	t	t	t	t
54 m	78 m	34.0	48.0	48.0	-	-	-	-
		38.0	48.0	48.0	48.0	-	-	-
		42.0	44.0	48.0	48.0	-	-	-
		46.0	38.0	48.0	48.0	-	-	-
		50.0	33.0	48.0	48.0	-	-	-
		54.0	28.0	45.0	48.0	48.0	-	-
		58.0	25.0	40.0	47.0	47.0	-	-
		62.0	22.0	36.0	47.0	47.0	-	-
	54 m	66.0	19.0	32.0	43.0	46.0	-	-
		70.0	16.0	29.0	39.0	45.0	-	-
		74.0	14.0	26.0	36.0	44.0	-	-
		78.0	12.0	24.0	34.0	40.0	-	-
		82.0	11.0	21.0	31.0	34.0	-	-
		34.0	39.0	39.0	-	-	-	-
		38.0	39.0	39.0	-	-	-	-
	84 m	42.0	39.0	39.0	39.0	-	-	-
		46.0	37.0	39.0	39.0	-	-	-
		50.0	32.0	39.0	39.0	-	-	-
		54.0	28.0	39.0	39.0	-	-	-
		58.0	24.0	39.0	39.0	-	-	-
		62.0	21.0	35.0	39.0	39.0	-	-
		66.0	19.0	32.0	39.0	39.0	-	-
		70.0	16.0	29.0	39.0	39.0	-	-
	# 24 m	74.0	14.0	26.0	36.0	38.0	-	-
		78.0	12.0	23.0	33.0	37.0	-	-
		82.0	10.0	21.0	31.0	36.0	-	-
		86.0	9.0	19.0	28.0	32.0	-	-
	# 30 m	16.0	170.0*	170.0*	170.0*	-	-	-
		18.0	165.0*	170.0*	170.0*	-	-	-
		20.0	144.0*	170.0*	170.0*	-	-	-
		22.0	127.0*	160.0*	167.0*	-	-	-
		24.0	114.0	144.0*	160.0*	-	-	-
		26.0	103.0	130.0*	152.0*	-	-	-
		28.0	93.0	119.0*	142.0*	-	-	-
		30.0	85.0	109.0	130.0*	-	-	-
	# 36 m	18.0	143.0*	143.0*	143.0*	-	-	-
		20.0	126.0*	143.0*	143.0*	-	-	-
		22.0	112.0*	142.0*	142.0*	-	-	-
		24.0	101.0	129.0*	137.0*	-	-	-
		26.0	92.0	118.0*	133.0*	-	-	-
		28.0	84.0	108.0*	128.0*	-	-	-
		30.0	71.0	92.0	111.0*	-	-	-
		34.0	56.0	77.0	94.0*	107.0*	-	-
	42 m	38.0	49.0	68.0	83.0	96.0*	-	-
		42.0	41.0	59.0	73.0	84.0	-	-
		46.0	34.0	50.0	61.0	71.0	-	-
		50.0	28.0	41.0	52.0	61.0	-	-
		54.0	23.0	37.0	48.0	55.0	-	-
		58.0	20.0	33.0	44.0	52.0	-	-
		62.0	18.0	30.0	40.0	48.0	-	-
		74.0	16.0	27.0	37.0	43.0	-	-

*: Double hook block required

#: Short luffing jibs : min. weight of hook block : 5.5t




TEREX TC 3200 H



Lifting capacities
Capacités

500 TON

Tragfähigkeiten
Capacités



HSWSL-85°



MB	JIB	m	superlift					
			0t	50t	100t	150t	175t	200t
			t	t	t	t	t	t
60 m	48 m	24.0	95.0*	95.0*	-	-	-	-
		26.0	93.0*	95.0*	95.0*	-	-	-
		28.0	84.0*	95.0*	95.0*	-	-	-
		30.0	77.0	94.0*	94.0*	-	-	-
		34.0	64.0	88.0*	91.0*	-	-	-
		38.0	55.0	77.0	88.0*	88.0*	-	-
		42.0	47.0	67.0	83.0*	85.0*	-	-
		46.0	41.0	60.0	74.0	82.0*	-	-
		50.0	36.0	53.0	66.0	77.0	-	-
		54.0	32.0	48.0	60.0	71.0	-	-
	54 m	26.0	84.0*	84.0*	-	-	-	-
		28.0	83.0*	84.0*	84.0*	-	-	-
		30.0	75.0	84.0*	84.0*	-	-	-
		34.0	63.0	82.0*	82.0*	-	-	-
		38.0	53.0	75.0	80.0*	80.0*	-	-
		42.0	46.0	66.0	77.0	77.0	-	-
		46.0	40.0	58.0	73.0	73.0	-	-
		50.0	35.0	52.0	65.0	70.0	-	-
		54.0	31.0	47.0	59.0	66.0	-	-
		58.0	27.0	42.0	54.0	62.0	-	-
	60 m	28.0	73.0	73.0	-	-	-	-
		30.0	73.0	73.0	73.0	-	-	-
		34.0	62.0	73.0	73.0	-	-	-
		38.0	53.0	72.0	72.0	-	-	-
		42.0	46.0	65.0	69.0	-	-	-
		46.0	40.0	58.0	66.0	-	-	-
		50.0	35.0	52.0	63.0	-	-	-
		54.0	31.0	47.0	58.0	-	-	-
	66 m	30.0	63.0	63.0	-	-	-	-
		34.0	60.0	63.0	63.0	-	-	-
		38.0	51.0	63.0	63.0	-	-	-
		42.0	44.0	62.0	62.0	-	-	-
		46.0	38.0	57.0	60.0	60.0	-	-
		50.0	33.0	51.0	59.0	59.0	-	-
		54.0	29.0	45.0	57.0	57.0	-	-
		58.0	25.0	41.0	52.0	54.0	-	-
	72 m	62.0	22.0	37.0	48.0	52.0	-	-
		66.0	20.0	33.0	44.0	50.0	-	-
		70.0	17.0	29.0	40.0	47.0	-	-
		74.0	15.0	27.0	37.0	44.0	-	-
	78 m	34.0	54.0	54.0	-	-	-	-
		38.0	51.0	54.0	54.0	-	-	-
		42.0	44.0	54.0	54.0	-	-	-
		46.0	38.0	53.0	53.0	-	-	-
		50.0	33.0	51.0	52.0	52.0	-	-
		54.0	29.0	45.0	52.0	52.0	-	-
		58.0	25.0	40.0	51.0	51.0	-	-
		62.0	22.0	36.0	47.0	50.0	-	-
		66.0	19.0	33.0	43.0	48.0	-	-
		70.0	17.0	29.0	40.0	47.0	-	-
		74.0	15.0	27.0	37.0	44.0	-	-
		78.0	12.0	23.0	33.0	38.0	-	-
		82.0	10.0	21.0	29.0	35.0	-	-

MB	JIB	m	superlift					
			0t	50t	100t	150t	175t	200t
			t	t	t	t	t	t
60 m	84 m	38.0	36.0	36.0	-	-	-	-
		42.0	36.0	36.0	-	-	-	-
		46.0	36.0	36.0	36.0	-	-	-
		50.0	32.0	36.0	36.0	-	-	-
		54.0	27.0	36.0	36.0	-	-	-
		58.0	24.0	35.0	35.0	-	-	-
		62.0	21.0	35.0	35.0	-	-	-
		66.0	18.0	31.0	35.0	-	-	-
		70.0	16.0	28.0	34.0	-	-	-
		74.0	14.0	25.0	34.0	-	-	-
		78.0	12.0	23.0	33.0	-	-	-
		82.0	10.0	21.0	30.0	-	-	-
		86.0	8.0	19.0	28.0	-	-	-
	# 24 m	18.0	150.0*	150.0*	150.0*	-	-	-
		20.0	142.0*	150.0*	150.0*	-	-	-
		22.0	126.0*	149.0*	149.0*	-	-	-
		24.0	112.0*	142.0*	144.0*	-	-	-
		26.0	101.0	129.0*	140.0*	-	-	-
		28.0	92.0	118.0*	135.0*	-	-	-
		30.0	84.0	108.0*	129.0*	-	-	-
		34.0	70.0	92.0*	110.0*	-	-	-
	# 30 m	20.0	122.0*	122.0*	122.0*	-	-	-
		22.0	122.0*	122.0*	122.0*	-	-	-
		24.0	111.0*	122.0*	122.0*	-	-	-
		26.0	99.0*	121.0*	121.0*	-	-	-
		28.0	90.0	117.0*	119.0*	-	-	-
		30.0	82.0	107.0*	116.0*	-	-	-
		34.0	70.0	92.0*	110.0*	-	-	-
		38.0	60.0	80.0*	100.0*	-	-	-
	36 m	22.0	112.0*	112.0*	112.0*	-	-	-
		24.0	103.0*	110.0*	110.0*	-	-	-
		26.0	93.0*	108.0*	108.0*	-	-	-
		28.0	84.0	105.0*	105.0*	-	-	-
		30.0	76.0	103.0*	103.0*	-	-	-
		34.0	64.0	88.0	99.0*	-	-	-
		38.0	55.0	77.0	93.0*	-	-	-
		42.0	48.0	67.0	83.0	-	-	-
	42 m	24.0	97.0*	97.0*	97.0*	-	-	-
		26.0	91.0*	97.0*	97.0*	-	-	-
		28.0	82.0*	95.0*	95.0*	-	-	-
		30.0	75.0	93.0*	93.0*	-	-	-
		34.0	63.0	87.0*	89.0*	-	-	-
		38.0	54.0	75.0	86.0*	-	-	-
		42.0	46.0	66.0	82.0*	-	-	-
		46.0	40.0	59.0	73.0	-	-	-
	48 m	24.0	84.0*	84.0*	-	-	-	-
		26.0	84.0*	84.0*	-	-	-	-
		28.0	83.0*	84.0*	84.0*	-	-	-
		30.0	75.0	84.0*	84.0*	-	-	-
		34.0	63.0	80.0*	80.0*	-	-	-
		38.0	54.0	76.0	77.0	-	-	-
		42.0	46.0	67.0	74.0	74.0	-	-
		46.0	40.0	59.0	72.0	72.0	-	-
	54 m	50.0	35.0	53.0	66.0	70.0	-	-
		54.0	31.0	48.0	59.0	67.0	-	-
		26.0	74.0	74.0	-	-	-	-
		28.0	74.0	74.0	-	-	-	-
		30.0	74.0	74.0	74.0	-	-	-
		34.0	62.0	74.0	74.0	-	-	-
		38.0	52.0	71.0	71.0	-	-	-
		42.0	45.0	65.0	69.0	-	-	-
	58 m	46.0	39.0	58.0	67.0	-	-	-
		50.0	34.0	52.0	64.0	-	-	-
		54.0	30.0	46.0	58.0	-	-	-
		58.0	26.0	42.0	53.0	-	-	-

*: Double hook block required

#: Short luffing jibs : min. weight of hook block : 5.5t




TEREX TC 3200 H



Lifting capacities
Capacités

500 TON

Tragfähigkeiten
Capacités



HSWSL-85°



MB	JIB	m	superlift					
			0t	50t	100t	150t	175t	200t
			t	t	t	t	t	t
66 m	60 m	28.0	66.0	66.0	-	-	-	-
		30.0	66.0	66.0	-	-	-	-
		34.0	61.0	66.0	66.0	-	-	-
		38.0	52.0	65.0	65.0	-	-	-
		42.0	45.0	63.0	63.0	-	-	-
		46.0	39.0	58.0	61.0	-	-	-
		50.0	34.0	51.0	59.0	-	-	-
		54.0	30.0	46.0	57.0	-	-	-
		58.0	26.0	42.0	53.0	-	-	-
		62.0	23.0	38.0	48.0	-	-	-
		66.0	21.0	34.0	44.0	-	-	-
	66 m	30.0	57.0	57.0	-	-	-	-
		34.0	57.0	57.0	57.0	-	-	-
		38.0	50.0	57.0	57.0	-	-	-
		42.0	43.0	56.0	56.0	-	-	-
		46.0	37.0	55.0	55.0	-	-	-
		50.0	32.0	50.0	54.0	-	-	-
		54.0	28.0	45.0	52.0	-	-	-
		58.0	25.0	40.0	51.0	-	-	-
		62.0	22.0	36.0	47.0	-	-	-
		66.0	19.0	32.0	43.0	-	-	-
		70.0	17.0	29.0	40.0	-	-	-
	72 m	34.0	50.0	50.0	-	-	-	-
		38.0	50.0	50.0	50.0	-	-	-
		42.0	43.0	49.0	49.0	-	-	-
		46.0	37.0	48.0	48.0	-	-	-
		50.0	32.0	48.0	48.0	-	-	-
		54.0	28.0	44.0	47.0	-	-	-
		58.0	24.0	40.0	46.0	-	-	-
		62.0	21.0	36.0	45.0	-	-	-
		66.0	19.0	32.0	43.0	-	-	-
		70.0	16.0	29.0	39.0	-	-	-
		74.0	14.0	26.0	36.0	-	-	-
		78.0	13.0	24.0	33.0	-	-	-
	78 m	34.0	39.0	39.0	-	-	-	-
		38.0	39.0	39.0	-	-	-	-
		42.0	39.0	39.0	39.0	-	-	-
		46.0	36.0	39.0	39.0	-	-	-
		50.0	31.0	38.0	38.0	-	-	-
		54.0	27.0	38.0	38.0	-	-	-
		58.0	23.0	37.0	37.0	-	-	-
		62.0	20.0	35.0	37.0	-	-	-
		66.0	18.0	31.0	36.0	-	-	-
		70.0	15.0	28.0	35.0	-	-	-
		74.0	13.0	25.0	34.0	-	-	-
		78.0	12.0	23.0	33.0	-	-	-
	84 m	82.0	10.0	20.0	30.0	-	-	-
		38.0	32.0	32.0	-	-	-	-
		42.0	32.0	32.0	-	-	-	-
		46.0	32.0	32.0	32.0	-	-	-
		50.0	31.0	32.0	32.0	-	-	-
		54.0	27.0	32.0	32.0	-	-	-
		58.0	23.0	32.0	32.0	-	-	-
		62.0	20.0	32.0	32.0	-	-	-
		66.0	17.0	31.0	31.0	-	-	-
		70.0	15.0	28.0	31.0	-	-	-
		74.0	13.0	25.0	30.0	-	-	-
		78.0	11.0	22.0	29.0	-	-	-
		82.0	9.0	20.0	29.0	-	-	-
		86.0	8.0	18.0	27.0	-	-	-

MB	JIB	m	superlift					
			0t	50t	100t	150t	175t	200t
			t	t	t	t	t	t
72 m	# 24 m	18.0	128.0*	136.0*	138.0*	-	-	-
		20.0	128.0*	136.0*	138.0*	-	-	-
		22.0	124.0*	133.0*	134.0*	-	-	-
		24.0	111.0*	129.0*	130.0*	-	-	-
		26.0	100.0*	125.0*	126.0*	-	-	-
		28.0	91.0	117.0*	122.0*	-	-	-
		30.0	83.0	107.0*	118.0*	-	-	-
		32.0	76.0	99.0*	114.0*	-	-	-
	# 30 m	20.0	108.0*	108.0*	-	-	-	-
		22.0	108.0*	108.0*	108.0*	-	-	-
		24.0	108.0*	108.0*	108.0*	-	-	-
		26.0	98.0*	107.0*	107.0*	-	-	-
		28.0	89.0	104.0*	104.0*	-	-	-
		30.0	81.0	101.0*	101.0*	-	-	-
	# 36 m	34.0	68.0	91.0	96.0*	-	-	-
		38.0	59.0	79.0	90.0	-	-	-
		22.0	93.0*	93.0*	-	-	-	-
		24.0	93.0*	93.0*	-	-	-	-
		26.0	93.0*	93.0*	-	-	-	-
		28.0	90.0*	92.0*	-	-	-	-
	# 42 m	30.0	82.0*	91.0*	-	-	-	-
		34.0	69.0	86.0*	-	-	-	-
		38.0	59.0	79.0*	-	-	-	-
		42.0	51.0	70.0	-	-	-	-
		24.0	81.0*	81.0*	-	-	-	-
		26.0	81.0*	81.0*	81.0*	-	-	-
	# 48 m	28.0	81.0*	81.0*	81.0*	-	-	-
		30.0	80.0*	81.0*	81.0*	-	-	-
		34.0	67.0	78.0	78.0	-	-	-
		38.0	57.0	75.0	75.0	-	-	-
		42.0	49.0	69.0	71.0	-	-	-
		46.0	43.0	61.0	68.0	-	-	-
	# 54 m	26.0	76.0	76.0	-	-	-	-
		28.0	76.0	76.0	-	-	-	-
		30.0	74.0	76.0	76.0	-	-	-
		34.0	62.0	72.0	72.0	-	-	-
		38.0	53.0	70.0	70.0	-	-	-
		42.0	46.0	66.0	68.0	-	-	-
	# 60 m	46.0	40.0	58.0	66.0	-	-	-
		50.0	35.0	52.0	64.0	-	-	-
		54.0	31.0	47.0	59.0	-	-	-
		28.0	65.0	65.0	-	-	-	-
		30.0	65.0	65.0	-	-	-	-
		34.0	61.0	65.0	65.0	-	-	-
	# 66 m	38.0	51.0	63.0	63.0	-	-	-
		42.0	44.0	62.0	62.0	-	-	-
		46.0	38.0	57.0	60.0	-	-	-
		50.0	33.0	51.0	59.0	-	-	-
		54.0	29.0	46.0	57.0	-	-	-
		58.0	25.0	41.0	53.0	-	-	-
	# 72 m	30.0	58.0	58.0	-	-	-	-
		34.0	58.0	58.0	58.0	-	-	-
		38.0	51.0	57.0	57.0	-	-	-
		42.0	44.0	56.0	56.0	-	-	-
		46.0	38.0	55.0	55.0	-	-	-
		50.0	33.0	51.0	54.0	-	-	-
	# 84 m	54.0	29.0	46.0	53.0	-	-	-
		58.0	26.0	41.0	51.0	-	-	-
		62.0	23.0	37.0	48.0	-	-	-
		66.0	20.0	33.0	44.0	-	-	-
		70.0	17.0	30.0	41.0	-	-	-
		74.0	14.0	27.0	38.0	-	-	-

*: Double hook block required

#: Short luffing jibs : min. weight of hook block : 5.5t




TEREX TC 3200 H



Lifting capacities
Capacités

500 TON

Tragfähigkeiten
Capacités



HSWSL-85°



MB	JIB	m	superlift					
			0t	50t	100t	150t	175t	200t
72 m	66 m	30.0	50.0	50.0	-	-	-	-
		34.0	50.0	50.0	-	-	-	-
		38.0	49.0	50.0	50.0	-	-	-
		42.0	42.0	49.0	49.0	-	-	-
		46.0	36.0	48.0	48.0	-	-	-
		50.0	32.0	47.0	47.0	-	-	-
		54.0	28.0	44.0	46.0	-	-	-
		58.0	24.0	39.0	45.0	-	-	-
		62.0	21.0	35.0	44.0	-	-	-
		66.0	19.0	32.0	43.0	-	-	-
		70.0	16.0	29.0	39.0	-	-	-
	72 m	34.0	43.0	43.0	-	-	-	-
		38.0	43.0	43.0	-	-	-	-
		42.0	42.0	42.0	42.0	-	-	-
		46.0	36.0	42.0	42.0	-	-	-
		50.0	31.0	41.0	41.0	-	-	-
		54.0	27.0	41.0	41.0	-	-	-
		58.0	24.0	39.0	40.0	-	-	-
		62.0	21.0	35.0	39.0	-	-	-
		66.0	18.0	32.0	38.0	-	-	-
		70.0	16.0	28.0	37.0	-	-	-
		74.0	14.0	26.0	36.0	-	-	-
		78.0	12.0	23.0	33.0	-	-	-
	78 m	34.0	38.0	38.0	-	-	-	-
		38.0	38.0	38.0	-	-	-	-
		42.0	38.0	38.0	38.0	-	-	-
		46.0	35.0	37.0	37.0	-	-	-
		50.0	30.0	37.0	37.0	-	-	-
		54.0	26.0	36.0	36.0	-	-	-
		58.0	23.0	35.0	35.0	-	-	-
		62.0	20.0	34.0	34.0	-	-	-
		66.0	17.0	31.0	33.0	-	-	-
		70.0	15.0	27.0	32.0	-	-	-
		74.0	13.0	25.0	31.0	-	-	-
		78.0	11.0	22.0	30.0	-	-	-
		82.0	9.0	20.0	29.0	-	-	-
78 m	84 m	38.0	29.0	29.0	-	-	-	-
		42.0	29.0	29.0	-	-	-	-
		46.0	29.0	29.0	-	-	-	-
		50.0	29.0	29.0	29.0	-	-	-
		54.0	26.0	29.0	29.0	-	-	-
		58.0	23.0	29.0	29.0	-	-	-
		62.0	20.0	29.0	29.0	-	-	-
		66.0	17.0	28.0	28.0	-	-	-
		70.0	15.0	27.0	28.0	-	-	-
		74.0	13.0	24.0	27.0	-	-	-
		78.0	11.0	22.0	26.0	-	-	-
		82.0	9.0	20.0	26.0	-	-	-
	# 24 m	86.0	8.0	18.0	25.0	-	-	-
		90.0	6.0	16.0	24.0	-	-	-
		18.0	113.0*	113.0*	-	-	-	-
		20.0	113.0*	113.0*	-	-	-	-
		22.0	113.0*	113.0*	-	-	-	-
		24.0	109.0*	110.0*	-	-	-	-
		26.0	98.0	107.0*	-	-	-	-
		28.0	89.0	105.0*	-	-	-	-
		30.0	81.0	102.0*	-	-	-	-
	# 30 m	20.0	94.0*	94.0*	-	-	-	-
		22.0	94.0*	94.0*	-	-	-	-
		24.0	94.0*	94.0*	-	-	-	-
		26.0	94.0*	94.0*	-	-	-	-
		28.0	87.0*	91.0*	-	-	-	-
		30.0	79.0*	88.0*	-	-	-	-
		34.0	67.0	83.0*	-	-	-	-
		38.0	57.0	78.0	-	-	-	-

MB	JIB	m	superlift					
			0t	50t	100t	150t	175t	200t
78 m	# 36 m	22.0	83.0*	83.0*	-	-	-	-
		24.0	83.0*	83.0*	-	-	-	-
		26.0	83.0*	83.0*	-	-	-	-
		28.0	83.0*	83.0*	-	-	-	-
		30.0	80.0*	81.0*	-	-	-	-
		34.0	67.0	77.0*	-	-	-	-
		38.0	58.0	74.0	-	-	-	-
		42.0	50.0	69.0	-	-	-	-
	# 42 m	24.0	72.0	72.0	-	-	-	-
		26.0	72.0	72.0	-	-	-	-
		28.0	72.0	72.0	-	-	-	-
		30.0	72.0	72.0	-	-	-	-
		34.0	66.0	70.0	-	-	-	-
		38.0	56.0	66.0	-	-	-	-
		42.0	48.0	63.0	-	-	-	-
		46.0	42.0	60.0	-	-	-	-
		50.0	37.0	53.0	-	-	-	-
	48 m	26.0	68.0*	68.0*	-	-	-	-
		28.0	68.0*	68.0*	-	-	-	-
		30.0	68.0*	68.0*	68.0*	-	-	-
		34.0	61.0	66.0	66.0	-	-	-
		38.0	52.0	64.0	64.0	-	-	-
		42.0	45.0	62.0	62.0	-	-	-
		46.0	39.0	58.0	60.0	-	-	-
		50.0	34.0	52.0	58.0	-	-	-
		54.0	30.0	46.0	56.0	-	-	-
	54 m	28.0	59.0	59.0	-	-	-	-
		30.0	59.0	59.0	-	-	-	-
		34.0	59.0	59.0	59.0	-	-	-
		38.0	50.0	57.0	57.0	-	-	-
		42.0	43.0	55.0	55.0	-	-	-
		46.0	37.0	53.0	53.0	-	-	-
		50.0	32.0	50.0	52.0	-	-	-
		54.0	28.0	45.0	50.0	-	-	-
		58.0	25.0	40.0	48.0	-	-	-
	60 m	30.0	52.0	52.0	-	-	-	-
		34.0	52.0	52.0	-	-	-	-
		38.0	50.0	51.0	51.0	-	-	-
		42.0	43.0	49.0	49.0	-	-	-
		46.0	37.0	47.0	47.0	-	-	-
		50.0	32.0	46.0	46.0	-	-	-
		54.0	28.0	44.0	44.0	-	-	-
		58.0	25.0	40.0	43.0	-	-	-
		62.0	22.0	36.0	41.0	-	-	-
		66.0	19.0	33.0	40.0	-	-	-
	66 m	34.0	44.0	44.0	-	-	-	-
		38.0	44.0	44.0	44.0	-	-	-
		42.0	41.0	43.0	43.0	-	-	-
		46.0	36.0	41.0	41.0	-	-	-
		50.0	31.0	40.0	40.0	-	-	-
		54.0	27.0	39.0	39.0	-	-	-
		58.0	23.0	38.0	38.0	-	-	-
		62.0	20.0	35.0	37.0	-	-	-
		66.0	18.0	31.0	36.0	-	-	-
		70.0	16.0	28.0	35.0	-	-	-

*: Double hook block required

#: Short luffing jibs : min. weight of hook block : 5.5t




TEREX TC 3200 H


Lifting capacities
Capacités

500 TON

Tragfähigkeiten
Capacités



HSWSL-85°



DIN
ISO

75%

MB	JIB	m	superlift		
			0t	50t	100t
			t	t	t
78 m	72 m	34.0	38.0	38.0	-
		38.0	38.0	38.0	-
		42.0	37.0	37.0	37.0
		46.0	35.0	36.0	36.0
		50.0	30.0	35.0	35.0
		54.0	26.0	34.0	34.0
		58.0	23.0	33.0	33.0
		62.0	20.0	32.0	32.0
		66.0	18.0	31.0	31.0
		70.0	15.0	28.0	31.0
		74.0	13.0	25.0	30.0
		78.0	12.0	23.0	29.0
	78 m	38.0	32.0	32.0	-
		42.0	32.0	32.0	-
		46.0	31.0	31.0	31.0
		50.0	30.0	31.0	31.0
		54.0	25.0	30.0	30.0
		58.0	22.0	30.0	30.0
		62.0	19.0	29.0	29.0
		66.0	17.0	28.0	28.0
		70.0	14.0	27.0	28.0
		74.0	12.0	24.0	27.0
		78.0	10.0	22.0	26.0
		82.0	9.0	19.0	25.0
	84 m	38.0	27.0	27.0	-
		42.0	27.0	27.0	-
		46.0	27.0	27.0	-
		50.0	27.0	27.0	27.0
		54.0	25.0	26.0	26.0
		58.0	22.0	26.0	26.0
		62.0	19.0	26.0	26.0
		66.0	16.0	25.0	25.0
		70.0	14.0	25.0	25.0
		74.0	12.0	24.0	24.0
		78.0	10.0	21.0	23.0
		82.0	9.0	19.0	23.0
	90 m	86.0	7.0	17.0	22.0
		90.0	6.0	15.0	21.0
		38.0	22.0	22.0	-
		42.0	22.0	22.0	-
		46.0	22.0	22.0	-
		50.0	22.0	22.0	-
		54.0	22.0	22.0	22.0
		58.0	21.0	22.0	22.0
		62.0	18.0	22.0	22.0
		66.0	16.0	22.0	22.0
		70.0	13.0	22.0	22.0
		74.0	11.0	22.0	22.0
		78.0	9.0	21.0	21.0
		82.0	8.0	18.0	20.0
		86.0	6.0	16.0	20.0
		90.0	5.0	14.0	19.0
		94.0	4.0	13.0	18.0
84 m	72 m	34.0	33.0	33.0	-
		38.0	33.0	33.0	-
		42.0	32.0	32.0	-
		46.0	31.0	31.0	31.0 ²⁾
		50.0	30.0	30.0	30.0 ²⁾
		54.0	26.0	30.0	30.0 ²⁾
		58.0	22.0	29.0	29.0 ²⁾
		62.0	19.0	28.0	28.0 ²⁾
		66.0	17.0	27.0	27.0 ²⁾
		70.0	15.0	27.0	27.0 ²⁾
		74.0	13.0	24.0	26.0 ²⁾
		78.0	11.0	22.0	25.0 ²⁾

MB	JIB	m	superlift	
			0t	50t
			t	t
84 m	78 m	38.0	28.0	28.0
		42.0	28.0	28.0
		46.0	27.0	27.0
		50.0	27.0	27.0
		54.0	25.0	26.0
		58.0	21.0	25.0
		62.0	18.0	25.0
		66.0	16.0	24.0
		70.0	14.0	23.0
		74.0	12.0	23.0
		78.0	10.0	21.0
		82.0	8.0	19.0
	84 m	38.0	23.0	23.0
		42.0	23.0	23.0
		46.0	23.0	23.0
		50.0	23.0	23.0
		54.0	22.0	22.0
		58.0	21.0	22.0
		62.0	18.0	22.0
		66.0	16.0	21.0
		70.0	13.0	21.0
		74.0	11.0	20.0
		78.0	10.0	19.0
		82.0	8.0	19.0
	90 m	86.0	7.0	17.0
		90.0	5.0	15.0
		42.0	19.0	19.0
		46.0	19.0	19.0
		50.0	19.0	19.0
		54.0	19.0	19.0
		58.0	19.0	19.0
		62.0	17.0	19.0
		66.0	15.0	18.0
		70.0	13.0	18.0
		74.0	11.0	18.0
		78.0	9.0	17.0
	90 m	82.0	7.0	16.0
		86.0	6.0	16.0
		90.0	4.0	14.0
		94.0	-	12.0
		34.0	28.0	28.0
		38.0	28.0	28.0
		42.0	28.0	28.0
		46.0	27.0	27.0
		50.0	27.0	27.0
		54.0	25.0	26.0
		58.0	22.0	25.0
		62.0	19.0	25.0
		66.0	16.0	24.0
		70.0	14.0	23.0
		74.0	12.0	22.0
		78.0	10.0	21.0
	78 m	38.0	24.0	24.0
		42.0	24.0	24.0
		46.0	23.0	23.0
		50.0	23.0	23.0
		54.0	22.0	22.0
		58.0	21.0	22.0
		62.0	18.0	21.0
		66.0	15.0	21.0
		70.0	13.0	20.0
		74.0	11.0	19.0
		78.0	9.0	19.0
		82.0	8.0	18.0

MB	JIB	m	superlift	
			0t	50t
			t	t
90 m	84 m	38.0	20.0	20.0
		42.0	20.0	20.0
		46.0	20.0	20.0
		50.0	19.0	19.0
		54.0	19.0	19.0
		58.0	19.0	19.0
		62.0	17.0	18.0
		66.0	15.0	18.0
		70.0	13.0	17.0
		74.0	11.0	17.0
		78.0	9.0	16.0
		82.0	7.0	16.0
	90 m	86.0	6.0	15.0
		90.0	5.0	14.0
		42.0	17.0	17.0
		46.0	17.0	17.0
		50.0	16.0	16.0
		54.0	16.0	16.0
		58.0	16.0	16.0
		62.0	15.0	15.0
		66.0	14.0	15.0
		70.0	12.0	15.0
		74.0	10.0	14.0
		78.0	8.0	14.0
	102 m *	82.0	7.0	13.0
		86.0	5.0	13.0
		90.0	4.0	12.0
		94.0	-	12.0
		46.0	10.5	10.5
		50.0	10.0	10.0
		54.0	10.0	10.0
		58.0	10.0	10.0
		62.0	9.0	9.0
		66.0	9.0	9.0
		70.0	9.0	9.0
		74.0	7.0	9.0
		78.0	6.0	9.0
		82.0	4.0	9.0
		86.0	2.0	8.0
		90.0	-	8.0
		94.0	-	8.0
		98.0	-	8.0
		102.0	-	6.0
		106.0	-	5.0

*: Special conditions. Max. wind speed 5 m/s

²⁾: Only with superlift at 15m




TEREX TC 3200 H

Working ranges
Portées

500 TON

Arbeitsbereiche
Werkbereich

HSWSL 85°

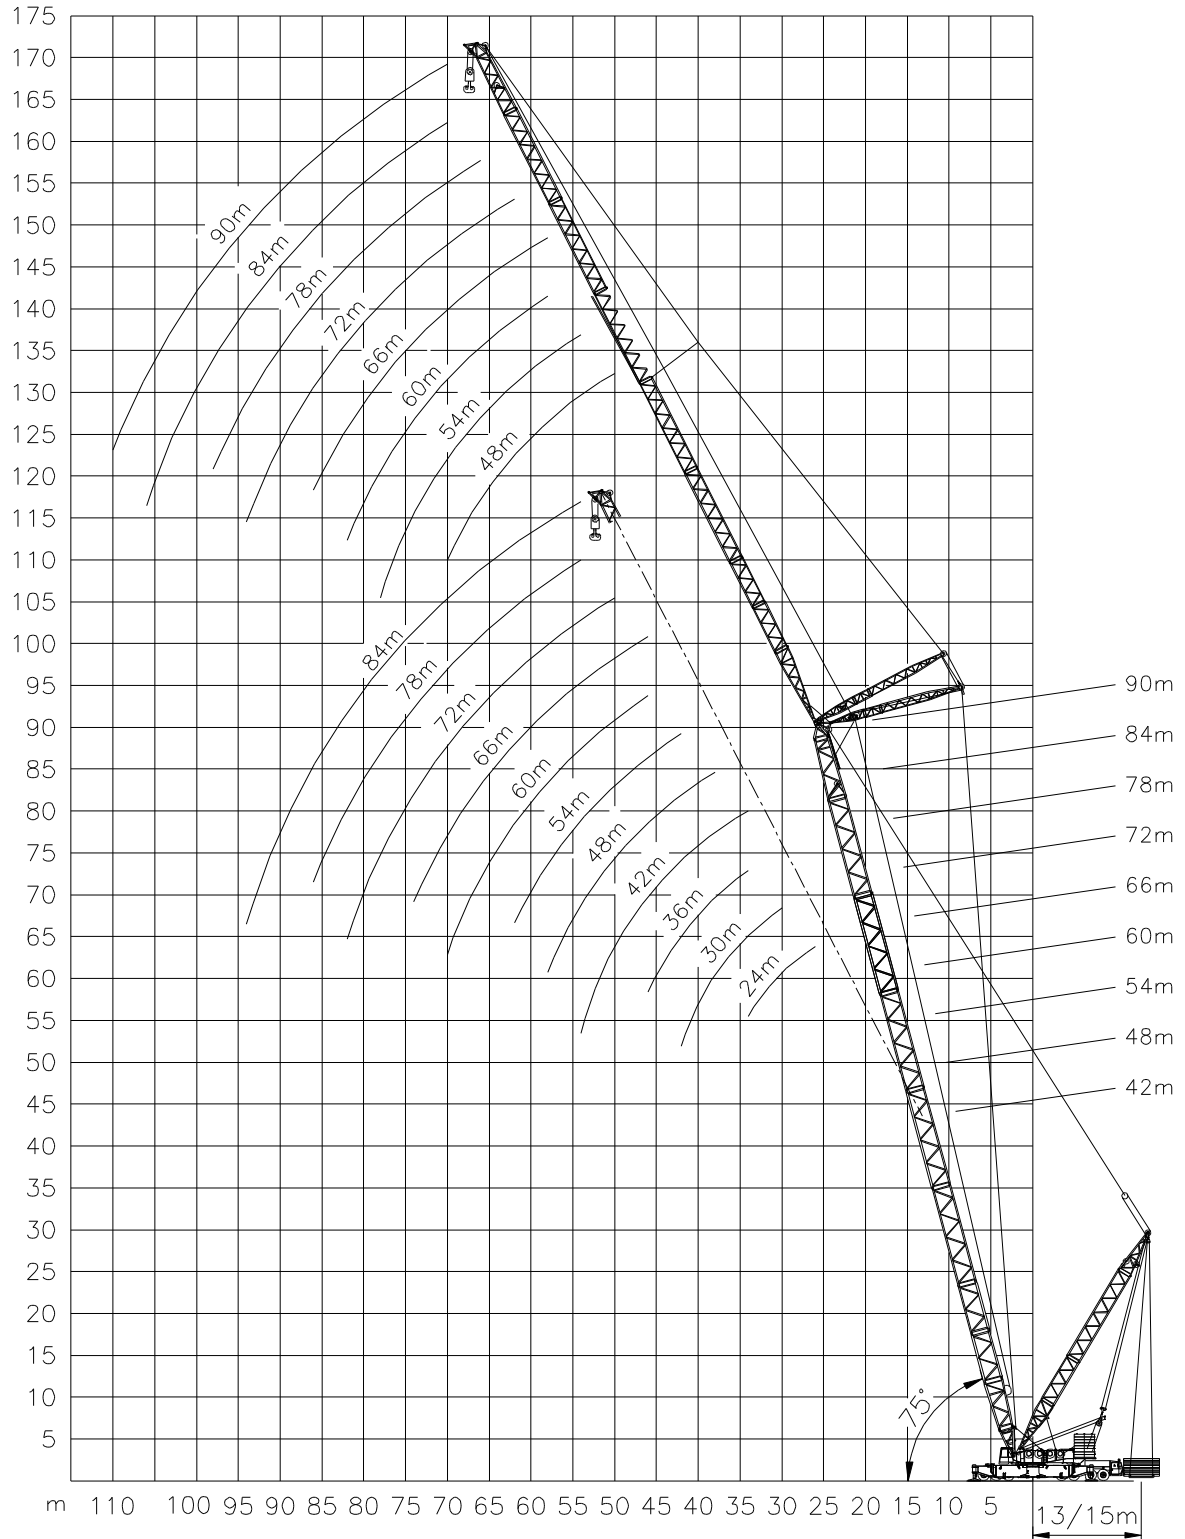




TEREX TC 3200 H



Lifting capacities
Capacités

500 TON

Tragfähigkeiten
Capacités



HSWSL-75°



MB	JIB	m	superlift					
			0t	50t	100t	150t	175t	200t
48 m	78 m	54.0	21.0	37.0	50.0	50.0	50.0	-
		58.0	18.0	33.0	46.0	50.0	50.0	50.0
		62.0	15.0	29.0	42.0	50.0	50.0	50.0
		66.0	13.0	26.0	38.0	47.0	50.0	50.0
		70.0	11.0	23.0	34.0	43.0	47.0	50.0
		74.0	9.0	21.0	31.0	40.0	44.0	48.0
		78.0	7.0	19.0	28.0	37.0	41.0	44.0
		82.0	-	16.0	26.0	34.0	38.0	41.0
		86.0	-	15.0	24.0	32.0	35.0	37.0
		90.0	-	13.0	22.0	30.0	32.0	32.0
	84 m	58.0	17.0	32.0	41.0	41.0	41.0	-
		62.0	15.0	29.0	41.0	41.0	41.0	-
		66.0	12.0	26.0	37.0	41.0	41.0	-
		70.0	10.0	23.0	34.0	41.0	41.0	-
		74.0	9.0	20.0	31.0	40.0	41.0	-
		78.0	7.0	18.0	28.0	37.0	40.0	-
		82.0	-	16.0	25.0	34.0	37.0	-
		86.0	-	14.0	23.0	32.0	35.0	-
		90.0	-	13.0	21.0	29.0	32.0	-
		94.0	-	11.0	19.0	27.0	29.0	-
54 m	# 24 m	30.0	68.0	91.0	91.0	-	-	-
		34.0	58.0	84.0	90.0	-	-	-
		38.0	49.0	73.0	83.0	-	-	-
		34.0	55.0	82.0	83.0	-	-	-
	# 30 m	38.0	47.0	72.0	79.0	-	-	-
		42.0	41.0	63.0	74.0	-	-	-
		38.0	45.0	69.0	86.0	106.0*	106.0*	113.0*
		42.0	39.0	61.0	76.0	95.0	95.0	101.0
	36 m	46.0	34.0	53.0	68.0	86.0	86.0	91.0
		50.0	30.0	48.0	61.0	78.0	78.0	83.0
		38.0	43.0	67.0	84.0	105.0*	105.0*	111.0*
		42.0	37.0	59.0	74.0	93.0*	93.0*	99.0*
	42 m	46.0	32.0	52.0	66.0	84.0	84.0	89.0
		50.0	28.0	46.0	60.0	76.0	76.0	81.0
		54.0	24.0	41.0	54.0	70.0	70.0	74.0
		42.0	37.0	59.0	75.0	93.0*	93.0*	99.0*
	48 m	46.0	32.0	51.0	66.0	84.0	84.0	89.0
		50.0	28.0	46.0	60.0	76.0	76.0	81.0
		54.0	24.0	41.0	54.0	69.0	69.0	74.0
		58.0	21.0	36.0	49.0	64.0	64.0	68.0
	54 m	62.0	18.0	33.0	45.0	59.0	59.0	63.0
		46.0	30.0	50.0	65.0	82.0*	82.0*	87.0*
		50.0	26.0	44.0	58.0	74.0	74.0	79.0
		54.0	22.0	39.0	52.0	68.0	68.0	72.0
	60 m	58.0	19.0	35.0	48.0	62.0	62.0	66.0
		62.0	17.0	31.0	43.0	57.0	57.0	61.0
		66.0	15.0	28.0	40.0	53.0	53.0	57.0
		70.0	13.0	25.0	36.0	49.0	49.0	53.0
	66 m	74.0	11.0	23.0	33.0	45.0	45.0	49.0
		50.0	24.0	42.0	56.0	68.0	68.0	68.0
		54.0	20.0	37.0	51.0	66.0	66.0	68.0
		58.0	18.0	33.0	46.0	61.0	61.0	65.0

MB	JIB	m	superlift					
			0t	50t	100t	150t	175t	200t
54 m	72 m	54.0	20.0	36.0	50.0	59.0	59.0	59.0
		58.0	17.0	32.0	45.0	56.0	59.0	59.0
		62.0	14.0	29.0	41.0	51.0	55.0	59.0
		66.0	12.0	25.0	37.0	47.0	51.0	55.0
		70.0	10.0	23.0	34.0	43.0	47.0	51.0
		74.0	9.0	20.0	31.0	40.0	44.0	47.0
		78.0	7.0	18.0	28.0	37.0	40.0	44.0
		82.0	-	16.0	26.0	34.0	38.0	41.0
		86.0	-	15.0	24.0	32.0	35.0	37.0
	78 m	54.0	19.0	35.0	48.0	48.0	48.0	-
		58.0	16.0	31.0	44.0	48.0	48.0	48.0
		62.0	13.0	27.0	40.0	48.0	48.0	48.0
		66.0	11.0	24.0	36.0	46.0	48.0	48.0
		70.0	9.0	22.0	33.0	42.0	46.0	48.0
		74.0	7.0	19.0	30.0	39.0	43.0	46.0
		78.0	-	17.0	27.0	36.0	40.0	43.0
		82.0	-	15.0	25.0	33.0	37.0	40.0
		86.0	-	13.0	22.0	31.0	34.0	38.0
		90.0	-	12.0	20.0	29.0	32.0	34.0
	84 m	58.0	15.0	31.0	39.0	39.0	39.0	-
		62.0	13.0	27.0	39.0	39.0	39.0	-
		66.0	11.0	24.0	36.0	39.0	39.0	39.0
		70.0	9.0	21.0	32.0	39.0	39.0	39.0
		74.0	7.0	19.0	29.0	38.0	39.0	39.0
		78.0	5.0	17.0	26.0	35.0	39.0	39.0
		82.0	4.0	15.0	24.0	33.0	36.0	39.0
		86.0	-	13.0	22.0	31.0	34.0	37.0
		90.0	-	11.0	20.0	28.0	32.0	35.0
		94.0	-	10.0	18.0	26.0	29.0	31.0
		98.0	-	9.0	16.0	24.0	27.0	27.0
60 m	# 24 m	34.0	55.0	82.0	88.0	-	-	-
		36.0	50.0	76.0	87.0	-	-	-
		38.0	47.0	71.0	83.0	-	-	-
		34.0	52.0	80.0	81.0	-	-	-
	# 30 m	38.0	44.0	69.0	81.0	-	-	-
		42.0	38.0	60.0	76.0	-	-	-
		46.0	33.0	53.0	69.0	-	-	-
	36 m	38.0	43.0	67.0	84.0	98.0*	104.0*	111.0*
		42.0	37.0	58.0	74.0	87.0	93.0*	99.0*
		46.0	32.0	51.0	66.0	78.0	84.0	89.0
		50.0	28.0	45.0	59.0	71.0	76.0	81.0
	42 m	42.0	35.0	56.0	73.0	85.0	91.0	97.0*
		46.0	30.0	49.0	65.0	77.0	82.0	87.0
		50.0	26.0	44.0	58.0	70.0	74.0	79.0
		54.0	22.0	39.0	52.0	63.0	68.0	73.0
	48 m	58.0	20.0	35.0	48.0	58.0	63.0	67.0
		42.0	34.0	56.0	73.0	85.0	91.0*	95.0*
		46.0	30.0	49.0	65.0	76.0	82.0*	87.0*
		50.0	25.0	43.0	58.0	69.0	74.0	79.0
	54 m	54.0	22.0	39.0	52.0	63.0	68.0	72.0
		58.0	19.0	35.0	48.0	58.0	62.0	66.0
		62.0	17.0	31.0	43.0	53.0	57.0	61.0
		66.0	15.0	28.0	40.0	50.0	54.0	58.0

*: Double hook block required

#: Short luffing jibs : min. weight of hook block : 5.5t / superlift at 15m




TEREX TC 3200 H



Lifting capacities
Capacités

500 TON

Tragfähigkeiten
Capacités



HSWSL-75°



MB	JIB	m	superlift					
			0t	50t	100t	150t	175t	200t
60 m	60 m	50.0	24.0	41.0	56.0	68.0	71.0	71.0
		54.0	20.0	37.0	51.0	61.0	66.0	71.0
		58.0	18.0	33.0	46.0	56.0	61.0	65.0
		62.0	15.0	29.0	42.0	51.0	56.0	60.0
		66.0	13.0	26.0	38.0	47.0	51.0	55.0
		70.0	11.0	24.0	35.0	43.0	48.0	51.0
		74.0	9.0	21.0	32.0	40.0	44.0	48.0
		78.0	8.0	19.0	30.0	39.0	43.0	46.0
	66 m	50.0	22.0	39.0	55.0	62.0	62.0	62.0
		54.0	18.0	35.0	49.0	60.0	62.0	62.0
		58.0	16.0	31.0	44.0	54.0	59.0	62.0
		62.0	13.0	27.0	40.0	50.0	54.0	58.0
		66.0	11.0	24.0	36.0	46.0	50.0	54.0
		70.0	9.0	22.0	33.0	42.0	46.0	50.0
		74.0	8.0	19.0	30.0	39.0	43.0	46.0
		78.0	-	17.0	27.0	36.0	40.0	43.0
	72 m	50.0	18.0	34.0	49.0	53.0	53.0	53.0
		54.0	15.0	30.0	44.0	53.0	53.0	53.0
		58.0	13.0	27.0	39.0	49.0	53.0	53.0
		62.0	11.0	24.0	36.0	45.0	50.0	53.0
		66.0	9.0	21.0	32.0	42.0	46.0	49.0
		70.0	7.0	19.0	29.0	39.0	42.0	46.0
		74.0	-	17.0	27.0	36.0	39.0	43.0
		78.0	-	15.0	24.0	33.0	37.0	40.0
	78 m	50.0	14.0	29.0	43.0	43.0	43.0	-
		54.0	12.0	26.0	38.0	43.0	43.0	43.0
		58.0	9.0	23.0	34.0	43.0	43.0	43.0
		62.0	8.0	20.0	31.0	41.0	42.0	42.0
		66.0	-	18.0	28.0	38.0	42.0	42.0
		70.0	-	16.0	25.0	35.0	38.0	42.0
		74.0	-	14.0	23.0	32.0	36.0	39.0
		78.0	-	12.0	21.0	30.0	33.0	37.0
	84 m	50.0	11.0	25.0	35.0	35.0	35.0	-
		54.0	9.0	22.0	34.0	35.0	35.0	35.0
		58.0	7.0	20.0	31.0	35.0	35.0	35.0
		62.0	6.0	17.0	28.0	35.0	35.0	35.0
		66.0	4.0	15.0	25.0	35.0	35.0	35.0
		70.0	-	13.0	23.0	32.0	35.0	35.0
		74.0	-	12.0	21.0	29.0	33.0	34.0
		78.0	-	10.0	19.0	27.0	31.0	34.0
66 m	# 24 m	34.0	51.0	79.0	84.0	-	-	-
		38.0	43.0	68.0	83.0	-	-	-
		42.0	37.0	59.0	77.0	-	-	-
		46.0	31.0	51.0	67.0	-	-	-
	# 30 m	38.0	41.0	66.0	78.0	-	-	-
		42.0	35.0	57.0	76.0	-	-	-
		46.0	31.0	51.0	67.0	-	-	-
		50.0	25.0	43.0	58.0	69.0	74.0	79.0
	36 m	38.0	40.0	64.0	82.0	95.0*	102.0*	108.0*
		42.0	34.0	55.0	72.0	85.0	90.0	96.0*
		46.0	29.0	49.0	64.0	76.0	81.0	87.0
		50.0	25.0	43.0	58.0	69.0	74.0	79.0
	42 m	38.0	32.0	53.0	70.0	83.0*	89.0*	95.0*
		42.0	27.0	47.0	63.0	75.0	80.0*	85.0*
		46.0	23.0	41.0	56.0	67.0	72.0	77.0
		50.0	20.0	37.0	51.0	61.0	66.0	71.0
	48 m	38.0	32.0	53.0	70.0	83.0*	89.0*	95.0*
		42.0	27.0	47.0	63.0	75.0	80.0*	85.0*
		46.0	23.0	41.0	56.0	67.0	72.0	77.0
		50.0	20.0	37.0	51.0	61.0	66.0	71.0

MB	JIB	m	superlift					
			0t	50t	100t	150t	175t	200t
66 m	48 m	46.0	27.0	47.0	63.0	74.0	80.0*	85.0*
		50.0	23.0	41.0	56.0	67.0	72.0	77.0
		54.0	20.0	36.0	51.0	61.0	66.0	70.0
		58.0	17.0	32.0	46.0	56.0	60.0	64.0
		62.0	15.0	29.0	42.0	51.0	55.0	59.0
		66.0	13.0	26.0	38.0	47.0	51.0	55.0
	54 m	46.0	25.0	45.0	61.0	73.0	74.0	74.0
		50.0	21.0	39.0	55.0	66.0	71.0	74.0
		54.0	18.0	35.0	49.0	60.0	64.0	69.0
		58.0	15.0	31.0	44.0	54.0	59.0	63.0
		62.0	13.0	27.0	40.0	50.0	54.0	58.0
		66.0	11.0	24.0	36.0	46.0	50.0	54.0
		70.0	9.0	22.0	33.0	42.0	46.0	50.0
		74.0	8.0	20.0	30.0	39.0	43.0	46.0
	60 m	50.0	21.0	39.0	54.0	66.0	66.0	66.0
		54.0	18.0	34.0	49.0	60.0	64.0	66.0
		58.0	16.0	31.0	44.0	54.0	59.0	63.0
		62.0	13.0	27.0	40.0	50.0	54.0	58.0
		66.0	11.0	24.0	36.0	46.0	50.0	54.0
		70.0	9.0	22.0	33.0	42.0	46.0	50.0
		74.0	8.0	20.0	30.0	39.0	43.0	46.0
		78.0	-	17.0	27.0	36.0	40.0	43.0
	66 m	54.0	16.0	32.0	47.0	56.0	56.0	56.0
		58.0	14.0	29.0	42.0	53.0	56.0	56.0
		62.0	11.0	25.0	38.0	48.0	53.0	56.0
		66.0	9.0	22.0	34.0	44.0	49.0	52.0
		70.0	8.0	20.0	31.0	41.0	45.0	48.0
		74.0	-	18.0	28.0	38.0	42.0	45.0
		78.0	-	16.0	26.0	35.0	39.0	42.0
		82.0	-	14.0	23.0	32.0	36.0	39.0
	72 m	58.0	13.0	28.0	42.0	48.0	48.0	48.0
		62.0	11.0	25.0	37.0	48.0	48.0	48.0
		66.0	9.0	22.0	34.0	44.0	48.0	48.0
		70.0	7.0	19.0	31.0	40.0	45.0	48.0
		74.0	-	17.0	28.0	37.0	41.0	45.0
		78.0	-	15.0	25.0	35.0	38.0	42.0
		82.0	-	13.0	23.0	32.0	35.0	39.0
		86.0	-	12.0	21.0	30.0	33.0	36.0
	78 m	58.0	12.0	27.0	38.0	38.0	38.0	-
		62.0	9.0	24.0	36.0	38.0	38.0	38.0
		66.0	8.0	21.0	33.0	38.0	38.0	38.0
		70.0	6.0	18.0	29.0	38.0	38.0	38.0
		74.0	4.0	16.0	26.0	36.0	37.0	37.0
		78.0	-	14.0	24.0	34.0	37.0	37.0
		82.0	-	12.0	22.0	31.0	35.0	37.0
		86.0	-	11.0	20.0	29.0	32.0	35.0
	84 m	90.0	-	9.0	18.0	26.0	30.0	33.0
		94.0	-	8.0	16.0	24.0	28.0	31.0
		62.0	9.0	23.0	31.0	31.0	31.0	-
		66.0	7.0	20.0	31.0	31.0	31.0	-
		70.0	5.0	18.0	29.0	31.0	31.0	-
		74.0	4.0	16.0	26.0	31.0	31.0	-
		78.0	-	14.0	24.0	31.0	31.0	-
		82.0	-	12.0	21.0	31.0	31.0	-
	90 m	86.0	-	10.0	19.0	28.0	30.0	-
		90.0	-	9.0	17.0	26.0	30.0	-
		94.0	-	7.0	16.0	24.0	28.0	-
		98.0	-	6.0	14.0	22.0	26.0	-

*: Double hook block required

#: Short luffing jibs : min. weight of hook block : 5.5t / superlift at 15m




TEREX TC 3200 H


Lifting capacities
Capacités

500 TON

Tragfähigkeiten
Capacités



HSWSL-75°



MB	JIB	m	superlift					
			0t	50t	100t	150t	175t	200t
72 m	# 24 m	34.0	48.0	76.0	81.0	-	-	-
		38.0	41.0	65.0	81.0	-	-	-
		42.0	35.0	57.0	75.0	-	-	-
	# 30 m	38.0	38.0	63.0	75.0	75.0	-	-
		42.0	33.0	55.0	74.0	75.0	-	-
		46.0	28.0	48.0	66.0	71.0	-	-
		50.0	24.0	43.0	59.0	67.0	-	-
	# 36 m	42.0	33.0	55.0	66.0	66.0	-	-
		46.0	28.0	48.0	65.0	65.0	-	-
		50.0	24.0	42.0	59.0	63.0	-	-
	# 42 m	54.0	21.0	38.0	53.0	60.0	-	-
		42.0	30.0	53.0	60.0	60.0	-	-
		46.0	26.0	46.0	60.0	60.0	-	-
		50.0	22.0	40.0	57.0	59.0	-	-
	# 48 m	54.0	19.0	36.0	52.0	57.0	-	-
		58.0	16.0	32.0	47.0	54.0	-	-
		62.0	14.0	29.0	43.0	52.0	-	-
		46.0	25.0	44.0	61.0	72.0	75.0	75.0
	# 54 m	50.0	19.0	37.0	53.0	64.0	65.0	65.0
		54.0	16.0	32.0	47.0	58.0	62.0	65.0
		58.0	13.0	29.0	42.0	53.0	57.0	61.0
		62.0	11.0	25.0	38.0	48.0	52.0	56.0
	# 60 m	66.0	9.0	22.0	34.0	45.0	48.0	52.0
		70.0	7.0	20.0	31.0	41.0	45.0	48.0
		54.0	16.0	32.0	47.0	58.0	62.0	65.0
		58.0	13.0	29.0	42.0	53.0	57.0	61.0
	# 66 m	62.0	11.0	25.0	38.0	48.0	52.0	56.0
		66.0	9.0	22.0	34.0	45.0	48.0	52.0
		70.0	7.0	20.0	31.0	41.0	45.0	48.0
		74.0	-	18.0	29.0	38.0	42.0	45.0
	# 72 m	78.0	-	16.0	26.0	35.0	39.0	42.0
		54.0	14.0	30.0	45.0	49.0	49.0	49.0
		58.0	12.0	27.0	40.0	49.0	49.0	49.0
		62.0	9.0	24.0	36.0	47.0	49.0	49.0
	# 78 m	66.0	8.0	21.0	33.0	43.0	47.0	49.0
		70.0	-	18.0	29.0	40.0	44.0	47.0
		74.0	-	16.0	27.0	37.0	40.0	44.0
		78.0	-	14.0	24.0	34.0	38.0	41.0
	# 84 m	82.0	-	13.0	22.0	31.0	35.0	38.0
		86.0	-	11.0	19.0	28.0	32.0	35.0
		90.0	-	9.0	18.0	26.0	30.0	33.0
		94.0	-	7.0	15.0	23.0	27.0	-

MB	JIB	m	superlift					
			0t	50t	100t	150t	175t	200t
72 m	# 24 m	62.0	7.0	21.0	28.0	28.0	28.0	-
		66.0	5.0	19.0	28.0	28.0	28.0	-
		70.0	4.0	16.0	27.0	28.0	28.0	-
		74.0	-	14.0	25.0	28.0	28.0	-
		78.0	-	12.0	22.0	27.0	27.0	-
		82.0	-	10.0	20.0	27.0	27.0	-
		86.0	-	9.0	18.0	27.0	27.0	-
		90.0	-	7.0	16.0	25.0	27.0	-
		94.0	-	6.0	14.0	22.0	26.0	-
		98.0	-	5.0	13.0	21.0	25.0	-
		102.0	-	4.0	11.0	19.0	23.0	-
		38.0	37.0	62.0	77.0	-	-	-
	# 30 m	42.0	32.0	54.0	73.0	-	-	-
		46.0	27.0	47.0	65.0	-	-	-
		50.0	21.0	40.0	57.0	66.0	-	-
		54.0	18.0	35.0	51.0	72.0	-	-
	# 36 m	58.0	15.0	31.0	44.0	54.0	59.0	69.0
		62.0	13.0	27.0	40.0	50.0	54.0	58.0
		66.0	11.0	24.0	36.0	46.0	50.0	54.0
		70.0	9.0	22.0	34.0	45.0	48.0	52.0
	# 42 m	74.0	7.0	20.0	31.0	41.0	45.0	48.0
		78.0	-	18.0	29.0	38.0	42.0	45.0
		82.0	-	16.0	27.0	37.0	40.0	44.0
		86.0	-	14.0	25.0	35.0	39.0	42.0
	# 48 m	90.0	-	12.0	22.0	31.0	35.0	38.0
		94.0	-	10.0	20.0	28.0	32.0	35.0
		98.0	-	8.0	18.0	26.0	30.0	33.0
		102.0	-	6.0	16.0	24.0	28.0	31.0
	# 54 m	106.0	-	4.0	14.0	22.0	26.0	29.0
		110.0	-	3.0	12.0	20.0	24.0	27.0
		114.0	-	2.0	10.0	18.0	22.0	25.0
		118.0	-	1.0	8.0	16.0	20.0	23.0
	# 60 m	122.0	-	0.0	6.0	14.0	18.0	21.0
		126.0	-	-	4.0	12.0	16.0	19.0
		130.0	-	-	2.0	10.0	14.0	17.0
		134.0	-	-	0.0	8.0	12.0	15.0
	# 66 m	138.0	-	-	-	6.0	10.0	13.0
		142.0	-	-	-	4.0	8.0	11.0
		146.0	-	-	-	2.0	6.0	9.0
		150.0	-	-	-	0.0	4.0	7.0
	# 72 m	154.0	-	-	-	-	2.0	5.0
		158.0	-	-	-	-	0.0	3.0
		162.0	-	-	-	-	-	1.0
		166.0	-	-	-	-	-	-

#: Short luffing jibs : min. weight of hook block : 5.5t / superlift at 15m




TEREX TC 3200 H


Lifting capacities
Capacités

500 TON

Tragfähigkeiten
Capacités



HSWSL-75°



MB	JIB	m	superlift					
			0t	50t	100t	150t	175t	200t
			t	t	t	t	t	t
84 m	# 24 m	38.0	34.0	59.0	76.0	76.0	-	-
		42.0	29.0	51.0	71.0	76.0	-	-
		46.0	25.0	45.0	63.0	71.0	-	-
	# 30 m	42.0	27.0	49.0	66.0	66.0	-	-
		46.0	22.0	42.0	61.0	66.0	-	-
		50.0	19.0	37.0	55.0	65.0	-	-
	# 36 m	46.0	22.0	42.0	61.0	62.0	-	-
		50.0	19.0	37.0	55.0	62.0	-	-
		54.0	16.0	33.0	50.0	57.0	-	-
	# 42 m	58.0	14.0	29.0	45.0	54.0	-	-
		46.0	20.0	40.0	54.0	54.0	-	-
		50.0	17.0	35.0	53.0	54.0	-	-
	# 48 m	54.0	14.0	31.0	48.0	53.0	-	-
		58.0	12.0	27.0	43.0	50.0	-	-
		62.0	10.0	24.0	39.0	47.0	-	-
	# 54 m	50.0	16.0	34.0	50.0	52.0	-	-
		54.0	13.0	30.0	44.0	52.0	-	-
		58.0	11.0	26.0	40.0	51.0	-	-
	# 60 m	62.0	9.0	23.0	36.0	47.0	-	-
		66.0	7.0	20.0	32.0	43.0	-	-
		70.0	-	18.0	29.0	40.0	-	-
	# 66 m	54.0	11.0	28.0	42.0	45.0	-	-
		58.0	9.0	24.0	38.0	45.0	-	-
		62.0	7.0	21.0	34.0	44.0	-	-
	# 72 m	66.0	-	19.0	30.0	42.0	-	-
		70.0	-	16.0	28.0	38.0	-	-
		74.0	-	14.0	25.0	35.0	-	-
	# 78 m	54.0	12.0	28.0	39.0	39.0	-	-
		58.0	9.0	24.0	38.0	39.0	-	-
		62.0	7.0	21.0	34.0	39.0	-	-
	# 84 m	66.0	-	19.0	31.0	38.0	-	-
		70.0	-	17.0	28.0	37.0	-	-
		74.0	-	15.0	25.0	35.0	-	-
	# 90 m	78.0	-	13.0	23.0	33.0	-	-
		82.0	-	11.0	21.0	30.0	-	-
		86.0	-	9.0	19.0	28.0	-	-

MB	JIB	m	superlift					
			0t	50t	100t	150t	175t	200t
			t	t	t	t	t	t
90 m	# 24 m	38.0	30.0	55.0	71.0	71.0	-	-
		42.0	25.0	47.0	68.0	71.0	-	-
		46.0	21.0	41.0	61.0	70.0	-	-
	# 30 m	42.0	23.0	45.0	63.0	63.0	-	-
		46.0	19.0	39.0	59.0	63.0	-	-
		50.0	16.0	34.0	53.0	60.0	-	-
	# 36 m	54.0	13.0	30.0	47.0	56.0	-	-
		46.0	19.0	39.0	52.0	-	-	-
		50.0	16.0	34.0	52.0	-	-	-
	# 42 m	54.0	13.0	30.0	47.0	-	-	-
		58.0	11.0	27.0	43.0	-	-	-
		62.0	9.0	25.0	40.0	-	-	-
	# 48 m	58.0	11.0	28.0	45.0	-	-	-
		62.0	9.0	24.0	40.0	-	-	-
		66.0	7.0	21.0	36.0	-	-	-
	# 54 m	66.0	6.0	19.0	33.0	-	-	-
		70.0	5.0	17.0	30.0	-	-	-
		74.0	4.0	15.0	27.0	-	-	-
	# 60 m	74.0	4.0	15.0	27.0	-	-	-
		78.0	3.0	13.0	24.0	-	-	-
		82.0	2.0	11.0	21.0	-	-	-
	# 66 m	82.0	2.0	11.0	21.0	-	-	-
		86.0	1.0	9.0	18.0	-	-	-
		90.0	0.0	7.0	15.0	-	-	-
	# 72 m	86.0	1.0	9.0	18.0	-	-	-
		90.0	0.0	7.0	15.0	-	-	-
		94.0	0.0	5.0	12.0	-	-	-
	# 78 m	90.0	0.0	5.0	12.0	-	-	-
		94.0	0.0	3.0	9.0	-	-	-
		98.0	0.0	1.0	6.0	-	-	-
	# 84 m	94.0	0.0	3.0	9.0	-	-	-
		98.0	0.0	1.0	6.0	-	-	-
		102.0	0.0	0.0	3.0	-	-	-

#: Short luffing jibs : min. weight of hook block : 5.5t / superlift at 15m




TEREX TC 3200 H


Lifting capacities
Capacités

500 TON

Tragfähigkeiten
Capacités



HSWSL-75°



MB	JIB	m	superlift					
			0t	50t	100t	150t	175t	200t
			t	t	t	t	t	t
78 m	72 m	58.0	9.0	24.0	36.0	36.0	36.0	-
		62.0	7.0	21.0	34.0	36.0	36.0	-
		66.0	5.0	18.0	30.0	36.0	36.0	-
		70.0	-	16.0	27.0	35.0	35.0	-
		74.0	-	14.0	24.0	35.0	35.0	-
		78.0	-	12.0	22.0	32.0	34.0	-
		82.0	-	10.0	20.0	29.0	33.0	-
		86.0	-	9.0	18.0	27.0	31.0	-
		90.0	-	8.0	16.0	25.0	29.0	-
	78 m	62.0	-	20.0	30.0	30.0	30.0	-
		66.0	-	17.0	29.0	30.0	30.0	-
		70.0	-	15.0	26.0	30.0	30.0	-
		74.0	-	13.0	23.0	29.0	29.0	-
		78.0	-	11.0	21.0	29.0	29.0	-
		82.0	-	9.0	19.0	28.0	29.0	-
		86.0	-	8.0	17.0	26.0	28.0	-
		90.0	-	6.0	15.0	23.0	28.0	-
	84 m	66.0	-	17.0	26.0	26.0	26.0	-
		70.0	-	14.0	25.0	26.0	26.0	-
		74.0	-	12.0	23.0	25.0	25.0	-
		78.0	-	10.0	20.0	24.0	24.0	-
		82.0	-	9.0	18.0	24.0	24.0	-
		86.0	-	7.0	16.0	24.0	24.0	-
		90.0	-	6.0	15.0	23.0	24.0	-
		94.0	-	5.0	13.0	21.0	24.0	-
	90 m	98.0	-	4.0	11.0	19.0	23.0	-
		102.0	-	3.0	10.0	18.0	21.0	-
		66.0	-	16.0	21.0	21.0	21.0	-
		70.0	-	13.0	21.0	21.0	21.0	-
		74.0	-	11.0	21.0	21.0	21.0	-
		78.0	-	9.0	19.0	20.0	20.0	-
		82.0	-	8.0	17.0	20.0	20.0	-
		86.0	-	6.0	15.0	20.0	20.0	-
		90.0	-	5.0	13.0	20.0	20.0	-
		94.0	-	4.0	12.0	20.0	20.0	-
		98.0	-	-	10.0	18.0	20.0	-
		102.0	-	-	9.0	16.0	20.0	-
		106.0	-	-	8.0	15.0	19.0	-
		110.0	-	-	7.0	13.0	17.0	-
84 m	72 m	62.0	-	19.0	30.0	30.0	-	-
		66.0	-	16.0	28.0	30.0	-	-
		70.0	-	14.0	25.0	29.0	-	-
		74.0	-	12.0	23.0	29.0	-	-
		78.0	-	10.0	20.0	28.0	-	-
		82.0	-	9.0	18.0	27.0	-	-
		86.0	-	7.0	16.0	25.0	-	-
		90.0	-	6.0	15.0	23.0	-	-
		94.0	-	5.0	13.0	21.0	-	-
	78 m	62.0	-	18.0	25.0	25.0	-	-
		66.0	-	15.0	25.0	25.0	-	-
		70.0	-	13.0	24.0	25.0	-	-
		74.0	-	11.0	22.0	24.0	-	-
		78.0	-	9.0	19.0	24.0	-	-
		82.0	-	8.0	17.0	23.0	-	-
		86.0	-	6.0	15.0	22.0	-	-
		90.0	-	5.0	14.0	22.0	-	-
	84 m	62.0	-	17.0	25.0	25.0	-	-
		66.0	-	14.0	25.0	25.0	-	-
		70.0	-	12.0	23.0	25.0	-	-
		74.0	-	10.0	21.0	24.0	-	-
		78.0	-	9.0	19.0	23.0	-	-
		82.0	-	7.0	17.0	22.0	-	-
		86.0	-	6.0	15.0	21.0	-	-
		90.0	-	5.0	13.0	19.0	-	-
	90 m	62.0	-	16.0	24.0	24.0	-	-
		66.0	-	13.0	24.0	24.0	-	-
		70.0	-	11.0	22.0	24.0	-	-
		74.0	-	9.0	20.0	23.0	-	-
		78.0	-	8.0	18.0	22.0	-	-
		82.0	-	6.0	16.0	21.0	-	-
		86.0	-	5.0	14.0	20.0	-	-
		90.0	-	4.0	12.0	19.0	-	-

MB	JIB	m	superlift					
			0t	50t	100t	150t	175t	200t
			t	t	t	t	t	t
84 m	84 m	66.0	-	15.0	21.0	21.0	-	-
		70.0	-	13.0	21.0	21.0	-	-
		74.0	-	11.0	21.0	21.0	-	-
		78.0	-	9.0	19.0	20.0	-	-
		82.0	-	7.0	17.0	20.0	-	-
		86.0	-	6.0	15.0	19.0	-	-
		90.0	-	5.0	13.0	18.0	-	-
		94.0	-	-	12.0	17.0	-	-
		98.0	-	-	10.0	17.0	-	-
		102.0	-	-	9.0	16.0	-	-
	90 m	70.0	-	11.0	17.0	17.0	-	-
		74.0	-	9.0	17.0	17.0	-	-
		78.0	-	8.0	17.0	17.0	-	-
		82.0	-	6.0	16.0	16.0	-	-
		86.0	-	5.0	14.0	16.0	-	-
		90.0	-	-	12.0	16.0	-	-
		94.0	-	-	11.0	15.0	-	-
		98.0	-	-	9.0	15.0	-	-
	72 m	102.0	-	-	8.0	14.0	-	-
		106.0	-	-	7.0	13.0	-	-
		110.0	-	-	5.0	12.0	-	-
	78 m	62.0	-	17.0	25.0	25.0	-	-
		66.0	-	14.0	25.0	25.0	-	-
		70.0	-	12.0	23.0	25.0	-	-
		74.0	-	10.0	21.0	24.0	-	-
		78.0	-	9.0	19.0	23.0	-	-
		82.0	-	7.0	17.0	22.0	-	-
		86.0	-	6.0	15.0	21.0	-	-
		90.0	-	5.0	13.0	19.0	-	-
	90 m	94.0	-	-	12.0	18.0	-	-
		66.0	-	13.0	20.0	20.0	-	-
		70.0	-	11.0	20.0	20.0	-	-
		74.0	-	9.0	19.0	20.0	-	-
		78.0	-	7.0	17.0	20.0	-	-
		82.0	-	6.0	15.0	19.0	-	-
		86.0	-	5.0	14.0	18.0	-	-
		90.0	-	-	12.0	17.0	-	-
	84 m	94.0	-	-	10.0	16.0	-	-
		98.0	-	-	9.0	15.0	-	-
		70.0	-	10.0	17.0	17.0	-	-
		74.0	-	9.0	17.0	17.0	-	-
		78.0	-	7.0	17.0	17.0	-	-
		82.0	-	6.0	15.0	16.0	-	-
		86.0	-	-	13.0	15.0	-	-
		90.0	-	-	12.0	15.0	-	-
	90 m	94.0	-	-	10.0	14.0	-	-
		98.0	-	-	9.0	13.0	-	-
		102.0	-	-	7.0	12.0	-	-
		106.0	-	-	6.0	11.0	-	-
		70.0	-	9.0	14.0	14.0	-	-
		74.0	-	8.0	14.0	14.0	-	-
		78.0	-	6.0	14.0	14.0	-	-
		82.0	-	4.0	14.0	14.0	-	-
	78 m	86.0	-	-	12.0	13.0	-	-
		90.0	-	-	10.0	12.0	-	-
		94.0	-	-	9.0	12.0	-	-
		98.0	-	-	8.0	11.0	-	-
		102.0	-	-	6.0	10.0	-	-
		106.0	-	-	5.0	9.0	-	-
		110.0	-	-	4.0	9.0	-	-



TEREX TC 3200 H

500 TON


**Working speeds
Vitesses de travail**

**Arbeitsgeschwindigkeiten
Werksnelheden**

Mechanisms Mécanismes Antriebe Aandrijvingen	Speeds Vitesses Geschwindigkeiten Snelheden	Rope diameter Diamètre du câble Seildurchmesser Kabeldiameter	Single line pull Effort sur brin simple Zulässiger Seilzug je Strang Toegelaten trekkraft per part	Rope length Longueur des câbles Länge der Seile Kabellengte
Hoist 1 Treuil de levage n°1 Hubwerk 1 Hijlslier 1	max. 74 m/min (normal 42 m/min)	28 mm	133 kN	1000 m
Hoist 2 Treuil de levage n°2 Hubwerk 2 Hijlslier 2	max. 74 m/min (normal 42 m/min)	28 mm	133 kN	1000 m
Boom derricking Relevage de flèche Wippwerk Hauptausleger Toplier hoofdmast	max. 41 m/min	28 mm	133 kN*	870 m
Hoist A-frame Relevage chevalet Einziehwerk Lier A-frame	max. 35 m/min	28 mm		2 x 225 m
Fly jib hoist Relevage de fléchette Wippwerk Hilfsausleger Toplier wipper	max. 41 m/min	28 mm	133 kN*	670 m
Slewing gear Orientation Drehwerk Zwenkwerk	1 RPM 1 t/min 1 U/min 1 tpm			

* When used as hoist / Si utilisé comme treuil / Bei Nutzung als Hubwerk / Bij gebruik als hijlslier

Hook block/Crane hook
Crochet Mouflé/Crochet simple



Unterflasche/Hakengehänge
Kraanblok/Kraanhaak

Capacity Capacité Tragfähigkeit Capaciteit	Number of sheaves Nombre de poulies Anzahl der Rollen Aantal schijven	Number of lines Nombre de brins Strangzahl Aantal parten	Weight Poids Gewicht Gewicht	"B"
SWL 500 t	2 x 11	2 x 22	9800 kg	4.6 m
SWL 300 t	2 x 5	2 x 11	8502 kg	4.3 m
SWL 250 t	11	22	4620 kg	4.6 m
SWL 150 t	5	11	5523 kg	4.3 m
SWL 125 t	6	13	3040 kg	4.3 m
SWL 42 t	1	3	2610 kg	2.7 m