




sarens
group

www.sarens.com

LIEBHERR LR 1250

250 TON

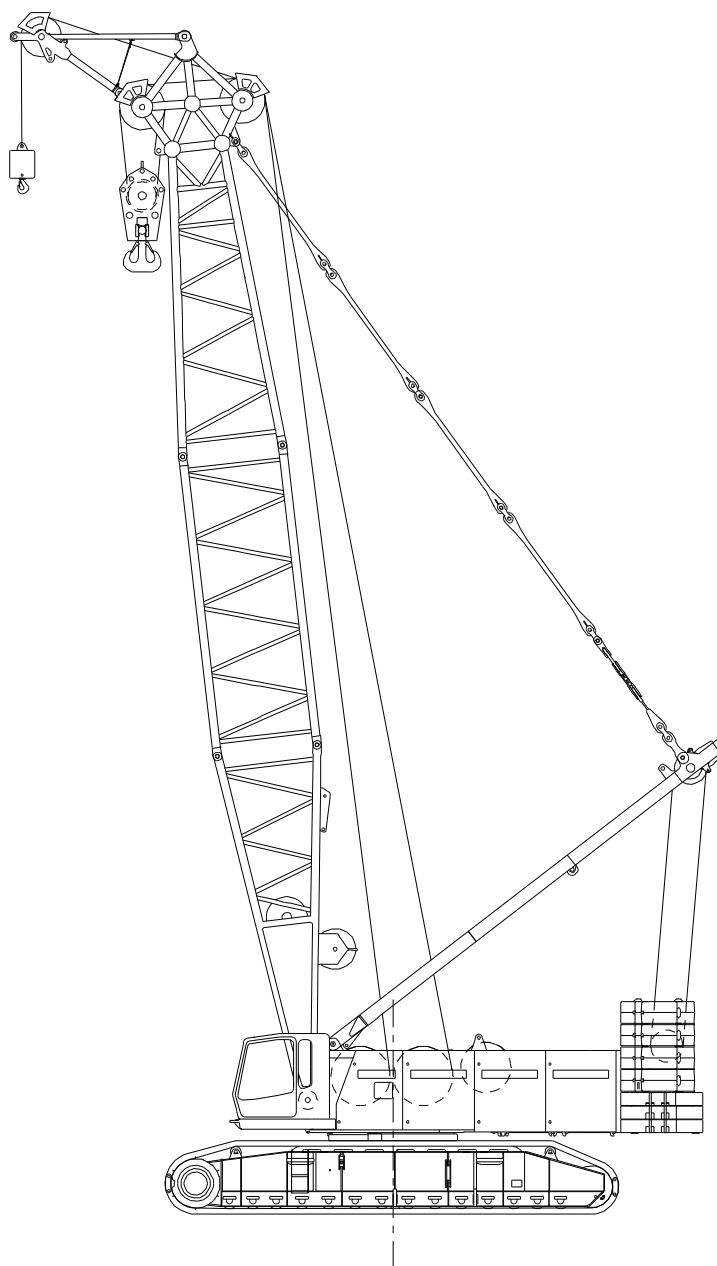

nothing too heavy, nothing too high





LIEBHERR LR 1250


Weight
Poids

250 TON



Gewicht
Gewicht

Superstructure with carbody Partie supérieure avec carter central Oberwagen mit Mittelstück Bovenwagen met centraal onderstelgedeelte	46 t
Crawler unit Bâti de chenille Raupe Rupsen	2 x 20 t
Counterweight + carbody counterweight Contrepoids + lest central Gegengewicht + Zentralballast Tegengewicht + Centraalballast	74.6 + 27 t


Carbody: 46t
12860 x 3500 x 3393 mm

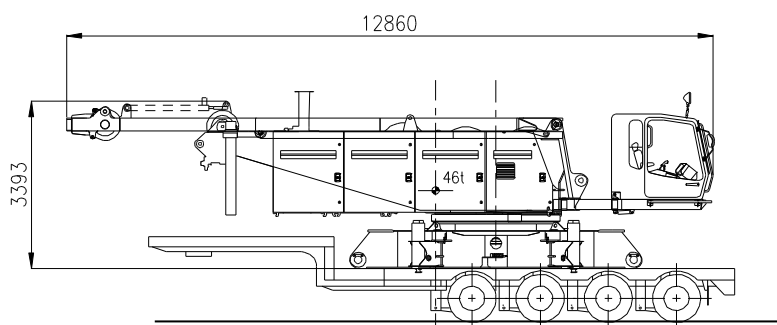


2 x 20 t
9048 x 1200 x 1455 mm




1 x 12.6 t
5480 x 1660 x 1100 mm






2 x 10.6 t
5480 x 1660 x 270 mm



8 x 5.1 t
1478 x 1360 x 495 mm



Carbody counterweight
2 x 13.5 t
5000 x 1180 x 380 mm






LIEBHERR LR 1250

Working ranges
Portées

250 TON

Arbeitsbereiche
Werkbereich

HPT

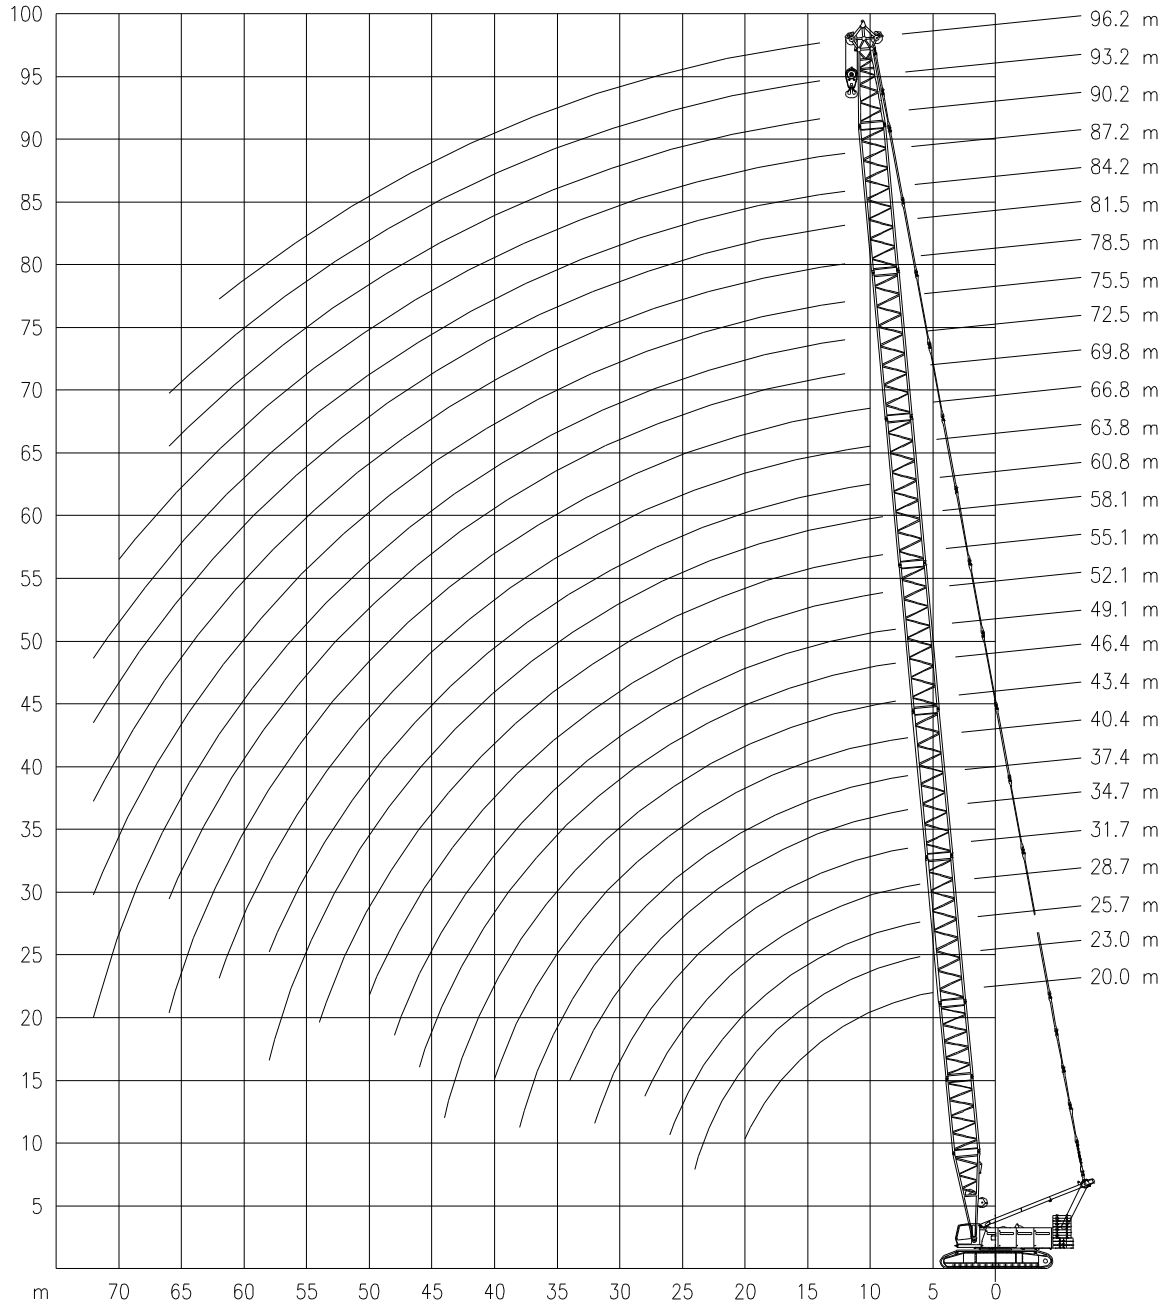




LIEBHERR LR 1250


Lifting capacities
Capacités

250 TON

Tragfähigkeiten
Capacités



HPT



	20.0m	23.0m	25.7m	28.7m	31.7m	34.7m	37.4m	40.4m	43.4m	46.4m	49.1m	52.1m	55.1m	58.1m
	t	t	t	t	t	t	t	t	t	t	t	t	t	t
5.0	200.0	-	-	-	-	-	-	-	-	-	-	-	-	-
6.0	200.0	194.1	171.6	166.5	-	-	-	-	-	-	-	-	-	-
7.0	181.4	173.1	163.9	158.7	150.1	141.5	129.3	121.6	-	-	-	-	-	-
8.0	152.7	146.7	141.6	136.4	131.4	126.8	122.8	117.6	110.5	104.9	95.4	-	-	-
9.0	131.7	126.8	123.2	119.1	115.1	111.3	108.2	104.7	101.7	98.4	93.7	89.0	80.8	77.0
10.0	112.1	111.5	108.8	105.3	102.2	99.0	96.5	93.7	91.2	88.4	86.3	83.8	79.5	76.4
12.0	85.0	84.9	85.1	84.9	83.2	80.8	79.2	77.1	75.1	73.1	71.5	69.6	67.9	66.3
14.0	68.2	68.1	68.2	68.1	67.8	67.7	66.8	65.1	63.5	62.0	60.7	59.3	57.8	56.4
16.0	56.5	56.4	56.6	56.4	56.2	56.0	56.0	55.9	54.9	53.4	52.4	51.4	50.2	49.0
18.0	48.0	47.9	48.1	48.0	47.8	47.6	47.6	47.4	47.2	46.8	46.0	44.9	43.9	42.9
20.0	41.5	41.5	41.7	41.6	41.5	41.2	41.2	41.0	40.8	40.5	40.5	40.0	39.1	38.2
22.0	-	36.3	36.6	36.5	36.3	36.1	36.1	35.9	35.7	35.4	35.3	35.1	34.8	34.0
24.0	-	32.1	32.4	32.3	32.2	32.0	32.0	31.7	31.5	31.3	31.2	30.9	30.7	30.4
26.0	-	-	29.0	28.9	28.9	28.7	28.7	28.5	28.3	27.9	28.0	27.8	27.5	27.3
28.0	-	-	-	26.1	26.0	25.8	25.8	25.6	25.4	25.2	25.1	24.9	24.7	24.4
30.0	-	-	-	-	23.6	23.4	23.4	23.2	23.0	22.8	22.7	22.4	22.2	22.0
32.0	-	-	-	-	21.4	21.3	21.3	21.1	20.9	20.7	20.6	20.3	20.1	19.9
34.0	-	-	-	-	-	19.4	19.5	19.3	19.1	18.8	18.7	18.5	18.3	18.0
36.0	-	-	-	-	-	-	17.8	17.6	17.5	17.2	17.1	16.9	16.7	16.4
38.0	-	-	-	-	-	-	16.4	16.2	16.0	15.8	15.7	15.5	15.3	15.0
40.0	-	-	-	-	-	-	-	14.9	14.8	14.6	14.5	14.3	14.1	14.0
42.0	-	-	-	-	-	-	-	-	13.7	13.5	13.5	13.3	13.1	12.8
44.0	-	-	-	-	-	-	-	-	12.6	12.4	12.4	12.2	12.0	11.8
46.0	-	-	-	-	-	-	-	-	-	11.5	11.5	11.3	11.1	10.9
48.0	-	-	-	-	-	-	-	-	-	-	10.6	10.4	10.2	10.0
50.0	-	-	-	-	-	-	-	-	-	-	-	9.6	9.4	9.1
54.0	-	-	-	-	-	-	-	-	-	-	-	-	7.9	7.6
58.0	-	-	-	-	-	-	-	-	-	-	-	-	-	6.3

	60.8m	63.8m	66.8m	69.8m	72.5m	75.5m	78.5m	81.5m	84.2m	87.2m	90.2m	93.2m	96.2m
	t	t	t	t	t	t	t	t	t	t	t	t	t
10.0	68.2	64.8	59.4	-	-	-	-	-	-	-	-	-	-
12.0	64.5	62.7	59.1	55.8	49.9	47.4	44.4	40.9	36.3	34.5	-	-	-
14.0	55.2	54.2	52.9	51.6	49.3	46.1	43.9	40.6	36.2	34.3	31.7	29.8	27.9
16.0	48.0	46.8	45.8	44.6	43.8	42.7	41.4	39.3	35.4	33.6	31.2	29.4	27.6
18.0	42.1	41.2	40.4	39.1	38.6	37.7	36.8	35.9	34.1	32.4	30.3	28.5	26.8
20.0	37.5	36.6	35.7	34.9	34.2	33.3	32.5	31.7	31.0	30.2	29.1	27.5	26.1
22.0	33.4	32.6	31.8	31.0	30.4	29.7	28.9	28.2	27.9	26.8	26.1	25.3	24.5
24.0	30.0	29.3	28.5	27.8	27.2	26.5	26.0	25.5	25.0	24.3	23.6	22.5	22.0
26.0	27.1	26.7	26.0	25.3	24.8	24.1	23.5	22.9	22.4	21.7	21.1	20.5	19.8
28.0	24.3	24.0	23.5	22.9	22.4	21.8	21.2	20.6	20.1	19.5	18.9	18.3	17.7
30.0	21.8	21.6	21.4	20.8	20.3	19.7	19.2	18.6	18.1	17.6	17.0	16.4	15.8
32.0	19.7	19.5	19.2	18.9	18.5	17.9	17.4	16.8	16.4	15.8	15.3	14.7	14.1
34.0	17.9	17.6	17.4	17.1	16.8	16.3	15.8	15.2	14.8	14.2	13.8	13.4	12.6
36.0	16.3	16.0	15.8	15.5	15.4	14.8	14.3	13.8	13.4	13.0	12.8	12.3	11.3
38.0	14.9	14.6	14.4	14.1	13.9	13.9	13.4	12.9	12.5	12.1	11.6	11.1	10.5
40.0	13.9	13.6	13.3	13.1	13.0	12.7	12.2	11.7	11.4	10.9	10.5	10.0	9.5
42.0	12.7	12.5	12.3	12.0	11.9	11.6	11.2	10.7	10.3	9.9	9.4	8.9	8.4
44.0	11.7	11.5	11.2	11.0	10.8	10.5	10.2	9.7	9.4	8.9	8.4	8.0	7.5
46.0	10.8	10.5	10.3	10.0	9.8	9.5	9.2	8.8	8.5	8.0	7.6	7.1	6.6
48.0	9.9	9.6	9.3	9.0	8.9	8.6	8.3	7.9	7.6	7.2	6.7	6.3	5.8
50.0	9.0	8.7	8.5	8.2	8.1	7.8	7.5	7.2	6.9	6.4	6.0	5.5	5.1
54.0	7.5	7.3	7.0	6.7	6.6	6.3	6.0	5.7	5.5	5.1	4.6	4.2	3.7
58.0	6.3	6.0	5.7	5.5	5.3	5.0	4.8	4.5	4.3	3.9	3.5	3.0	2.6
62.0	-	4.9	4.6	4.4	4.2	3.9	3.7	3.4	3.2	2.8	2.4	2.0	1.6
66.0	-	-	3.7	3.4	3.3	3.0	2.7	2.4	2.2	1.9	1.5	1.1	-
70.0	-	-	-	-	2.4	2.1	1.9	1.6	1.4	1.1	-	-	-
72.0	-	-	-	-	2.0	1.7	1.5	1.2	1.0	-	-	-	-




LIEBHERR LR 1250


Lifting capacities
Capacités

250 TON

Tragfähigkeiten
Capacités



HPT



	20.0m	23.0m	25.7m	28.7m	31.7m	34.7m	37.4m	40.4m	43.4m	46.4m	49.1m	52.1m	55.1m	58.1m
	t	t	t	t	t	t	t	t	t	t	t	t	t	t
8.0	-	-	-	-	-	-	-	-	104.1	96.3	90.0	-	-	-
9.0	-	-	-	-	40.6	101.5	98.6	95.4	92.6	89.7	87.4	83.9	78.3	73.2
10.0	-	101.7	46.6	95.9	93.1	90.2	87.9	85.3	82.8	80.4	78.6	76.2	74.2	72.0
12.0	77.5	77.4	77.6	77.4	75.6	73.5	71.9	69.9	68.3	66.4	64.9	63.2	61.6	59.9
14.0	61.9	61.9	62.0	61.9	61.8	61.6	60.5	58.9	57.5	56.0	55.1	53.7	52.4	51.1
16.0	51.2	51.2	51.4	51.3	51.1	51.0	50.9	50.6	49.6	48.3	47.4	46.2	45.1	44.0
18.0	43.3	43.4	43.5	43.4	43.3	43.1	43.1	42.9	42.7	42.3	41.6	40.6	39.6	38.7
20.0	37.4	37.4	37.7	37.6	37.5	37.3	37.2	37.0	36.9	36.6	36.5	35.8	35.0	34.1
22.0	-	32.7	33.0	32.9	32.7	32.5	32.5	32.3	32.1	31.9	31.8	31.6	31.1	30.3
24.0	-	28.8	29.1	29.1	29.0	28.7	28.9	28.7	28.4	28.3	28.1	28.0	27.7	27.4
26.0	-	-	26.0	26.0	25.9	25.7	25.7	25.5	25.4	25.1	25.1	24.8	24.6	24.4
28.0	-	-	-	23.3	23.3	23.1	23.1	22.9	22.7	22.5	22.4	22.2	22.0	21.7
30.0	-	-	-	14.7	21.0	20.8	20.9	20.7	20.5	20.3	20.2	19.9	19.7	19.5
32.0	-	-	-	-	19.0	18.9	18.9	18.7	18.6	18.3	18.2	18.0	17.8	17.5
34.0	-	-	-	-	-	17.2	17.2	17.0	16.9	16.6	16.6	16.3	16.1	15.8
36.0	-	-	-	-	-	-	15.7	15.6	15.4	15.2	15.1	14.8	14.6	14.5
38.0	-	-	-	-	-	-	14.5	14.4	14.3	14.1	14.0	13.8	13.6	13.4
40.0	-	-	-	-	-	-	-	13.2	13.1	12.9	12.8	12.6	12.4	12.2
42.0	-	-	-	-	-	-	-	-	12.0	11.8	11.8	11.6	11.4	11.1
44.0	-	-	-	-	-	-	-	-	11.0	10.9	10.8	10.6	10.4	10.2
46.0	-	-	-	-	-	-	-	-	-	10.0	10.0	9.7	9.5	9.3
48.0	-	-	-	-	-	-	-	-	-	-	9.1	8.9	8.7	8.4
50.0	-	-	-	-	-	-	-	-	-	-	-	8.1	7.9	7.6
54.0	-	-	-	-	-	-	-	-	-	-	-	-	6.5	6.3
58.0	-	-	-	-	-	-	-	-	-	-	-	-	-	5.1

	60.8m	63.8m	66.8m	69.8m	72.5m	75.5m	78.5m	81.5m	84.2m	87.2m	90.2m	93.2m	96.2m
	t	t	t	t	t	t	t	t	t	t	t	t	t
10.0	68.2	64.8	59.4	-	-	-	-	-	-	-	-	-	-
12.0	58.6	57.1	55.7	53.7	49.9	47.4	44.4	40.9	36.6	34.5	-	-	-
14.0	50.0	48.7	47.6	46.3	45.3	44.2	43.0	40.6	36.2	34.3	31.7	29.8	-
16.0	43.1	42.3	41.3	40.2	39.5	38.5	37.5	36.6	35.3	33.6	31.2	29.4	27.6
18.0	37.9	37.0	36.1	35.2	34.5	33.6	32.7	31.9	31.2	30.3	29.3	28.0	26.7
20.0	33.5	32.6	31.8	31.0	30.3	29.5	28.8	28.1	27.5	26.9	26.3	25.4	24.4
22.0	29.7	29.0	28.3	27.8	27.1	26.5	25.8	25.1	24.5	23.9	23.2	22.5	21.8
24.0	26.9	26.2	25.5	24.8	24.3	23.6	23.0	22.3	21.8	21.1	20.5	19.9	19.2
26.0	24.2	23.5	22.9	22.2	21.8	21.1	20.5	19.9	19.4	18.8	18.2	17.6	17.0
28.0	21.6	21.2	20.6	20.0	19.6	19.0	18.4	17.8	17.4	16.8	16.2	15.6	15.0
30.0	19.3	19.1	18.6	18.0	17.6	17.1	16.5	15.9	15.5	15.0	14.4	13.9	13.3
32.0	17.4	17.2	16.9	16.3	15.9	15.4	14.9	14.3	14.0	13.9	13.4	12.9	12.2
34.0	15.7	15.5	15.2	14.8	14.4	14.3	13.8	13.3	13.0	12.5	12.0	11.5	10.9
36.0	14.5	14.2	14.0	13.8	13.5	13.0	12.5	12.0	11.6	11.2	10.7	10.2	9.7
38.0	13.3	13.0	12.8	12.6	12.2	11.8	11.3	10.8	10.5	10.0	9.5	9.0	8.5
40.0	12.1	11.9	11.6	11.4	11.1	10.7	10.2	9.7	9.4	8.9	8.5	8.0	7.5
42.0	11.0	10.8	10.6	10.3	10.1	9.6	9.2	8.7	8.4	7.9	7.5	7.0	6.6
44.0	10.1	9.8	9.5	9.2	9.1	8.7	8.3	7.8	7.5	7.0	6.6	6.2	5.7
46.0	9.1	8.9	8.6	8.3	8.2	7.9	7.4	7.0	6.7	6.2	5.8	5.4	4.9
48.0	8.3	8.0	7.8	7.5	7.3	7.0	6.7	6.2	5.9	5.5	5.1	4.6	4.1
50.0	7.5	7.2	7.0	6.7	6.5	6.3	6.0	5.5	5.2	4.8	4.4	3.9	3.5
54.0	6.2	5.9	5.6	5.3	5.2	4.9	4.6	4.2	3.9	3.5	3.1	2.7	2.2
58.0	5.0	4.7	4.5	4.2	4.0	3.7	3.5	3.1	2.8	2.4	2.0	1.6	1.2
62.0	-	3.7	3.4	3.2	3.0	2.7	2.5	2.2	1.9	1.5	1.1	-	-
66.0	-	-	2.5	2.3	2.1	1.8	1.6	1.3	1.0	-	-	-	-
70.0	-	-	-	-	1.3	1.1	-	-	-	-	-	-	-
71.0	-	-	-	-	1.2	-	-	-	-	-	-	-	-




LIEBHERR LR 1250


Lifting capacities
Capacités

250 TON

Tragfähigkeiten
Capacités



HPT



	20.0m	23.0m	25.7m	28.7m	31.7m	34.7m	37.4m	40.4m	43.4m	46.4m	49.1m	52.1m	55.1m	58.1m
	t	t	t	t	t	t	t	t	t	t	t	t	t	t
5.0	181.6	-	-	-	-	-	-	-	-	-	-	-	-	-
6.0	147.5	139.4	133.2	120.4	-	-	-	-	-	-	-	-	-	-
7.0	119.5	114.0	109.6	105.0	100.5	96.4	88.7	81.0	-	-	-	-	-	-
8.0	100.2	96.2	92.9	89.4	86.0	82.8	80.2	77.5	74.2	68.5	63.9	-	-	-
9.0	86.0	82.8	80.5	77.7	75.0	72.4	70.3	67.9	65.9	63.7	61.9	59.2	55.2	51.4
10.0	73.5	72.6	70.7	68.4	66.3	64.1	62.5	60.5	58.6	56.7	55.3	53.7	52.2	50.5
12.0	55.3	55.3	55.5	55.0	53.5	51.9	50.7	49.2	47.8	46.4	45.3	44.0	42.7	41.7
14.0	43.8	43.8	44.0	43.9	43.7	43.1	42.2	41.2	40.1	39.0	38.1	37.1	36.0	35.0
16.0	36.0	36.0	36.2	36.1	36.0	35.8	35.8	35.1	34.1	33.2	32.5	31.5	30.6	29.7
18.0	30.2	30.2	30.4	30.3	30.2	30.0	30.0	29.8	29.4	28.6	28.2	27.4	26.7	25.9
20.0	25.8	25.9	26.1	26.0	25.9	25.8	25.8	25.6	25.4	25.1	24.6	23.9	23.2	22.5
22.0	-	22.4	22.7	22.6	22.5	22.3	22.3	22.1	21.9	21.7	21.6	21.0	20.4	19.7
24.0	-	19.4	19.8	19.8	19.7	19.5	19.5	19.3	19.1	18.9	18.8	18.5	18.0	17.3
26.0	-	-	17.4	17.4	17.4	17.2	17.2	17.0	16.8	16.6	16.5	16.3	15.9	15.3
28.0	-	-	-	15.4	15.4	15.2	15.2	15.0	14.9	14.6	14.6	14.5	14.4	14.0
30.0	-	-	-	13.8	13.9	13.8	13.8	13.6	13.5	13.3	13.2	13.0	12.8	12.4
32.0	-	-	-	-	12.4	12.3	12.4	12.2	12.0	11.8	11.8	11.5	11.3	11.1
34.0	-	-	-	-	-	11.0	11.1	10.9	10.8	10.6	10.5	10.3	10.1	9.8
36.0	-	-	-	-	-	-	10.0	9.8	9.7	9.5	9.4	9.2	8.9	8.7
38.0	-	-	-	-	-	-	8.9	8.8	8.7	8.4	8.4	8.1	7.9	7.6
40.0	-	-	-	-	-	-	-	7.9	7.7	7.5	7.4	7.2	7.0	6.7
42.0	-	-	-	-	-	-	-	-	6.9	6.7	6.6	6.4	6.1	5.8
44.0	-	-	-	-	-	-	-	-	6.1	5.9	5.8	5.6	5.4	5.1
46.0	-	-	-	-	-	-	-	-	-	5.2	5.1	4.9	4.7	4.4
48.0	-	-	-	-	-	-	-	-	-	-	4.5	4.3	4.0	3.8
50.0	-	-	-	-	-	-	-	-	-	-	-	3.7	3.5	3.2
54.0	-	-	-	-	-	-	-	-	-	-	-	-	2.4	2.2
58.0	-	-	-	-	-	-	-	-	-	-	-	-	-	1.3

	60.8m	63.8m	66.8m	69.8m	72.5m	75.5m	78.5m	81.5m	84.2m	87.2m	90.2m	93.2m	96.2m
	t	t	t	t	t	t	t	t	t	t	t	t	t
10.0	48.4	45.2	42.6	-	-	-	-	-	-	-	-	-	-
12.0	40.5	39.5	38.3	37.3	36.3	35.2	33.2	31.1	29.4	28.0	-	-	-
14.0	34.2	33.1	32.2	31.2	30.4	28.6	28.6	27.9	27.0	26.6	25.7	24.6	23.0
16.0	29.1	28.5	27.4	26.8	26.2	25.4	24.6	23.9	23.2	22.5	21.7	21.0	20.2
18.0	25.3	24.5	23.8	23.1	22.5	21.8	21.1	20.4	19.8	19.1	18.5	17.8	17.1
20.0	22.0	21.3	20.6	20.0	19.4	18.8	18.2	17.5	17.0	16.4	15.7	15.1	14.5
22.0	19.2	18.6	18.0	17.3	16.9	16.3	15.7	15.1	14.6	14.1	14.1	13.4	12.9
24.0	16.9	16.3	15.8	15.1	14.7	14.4	14.0	13.5	13.1	12.6	12.1	11.5	11.0
26.0	14.9	14.5	14.3	13.7	13.3	12.8	12.3	11.8	11.4	10.8	10.3	9.8	9.3
28.0	13.6	13.1	12.6	12.1	11.7	11.2	10.7	10.2	9.8	9.3	8.8	8.3	7.8
30.0	12.1	11.6	11.1	10.6	10.3	9.8	9.3	8.8	8.5	8.0	7.5	7.0	6.5
32.0	10.8	10.3	9.8	9.3	9.0	8.5	8.1	7.6	7.2	6.8	6.3	5.8	5.4
34.0	9.6	9.1	8.6	8.2	7.9	7.4	6.9	6.5	6.2	5.7	5.3	4.8	4.3
36.0	8.5	8.0	7.6	7.1	6.8	6.4	6.0	5.5	5.2	4.7	4.3	3.8	3.4
38.0	7.5	7.1	6.7	6.2	5.9	5.5	5.1	4.6	4.3	3.9	3.4	3.0	2.5
40.0	6.6	6.2	5.8	5.4	5.1	4.7	4.2	3.8	3.5	3.1	2.6	2.2	1.8
42.0	5.7	5.4	5.1	4.6	4.3	3.9	3.5	3.1	2.8	2.3	1.9	1.5	1.1
44.0	5.0	4.7	4.4	3.9	3.6	3.2	2.8	2.4	2.1	1.7	1.3	-	-
46.0	4.3	4.0	3.7	3.3	3.0	2.6	2.2	1.8	1.5	1.1	-	-	-
48.0	3.7	3.4	3.1	2.7	2.4	2.0	1.6	1.2	-	-	-	-	-
50.0	3.1	2.8	2.6	2.1	1.9	1.5	1.1	-	-	-	-	-	-
54.0	2.1	1.8	1.5	1.2	-	-	-	-	-	-	-	-	-
58.0	1.2	-	-	-	-	-	-	-	-	-	-	-	-




LIEBHERR LR 1250

Working ranges
Portées

250 TON

Arbeitsbereiche
Werkbereich

NDL 83°

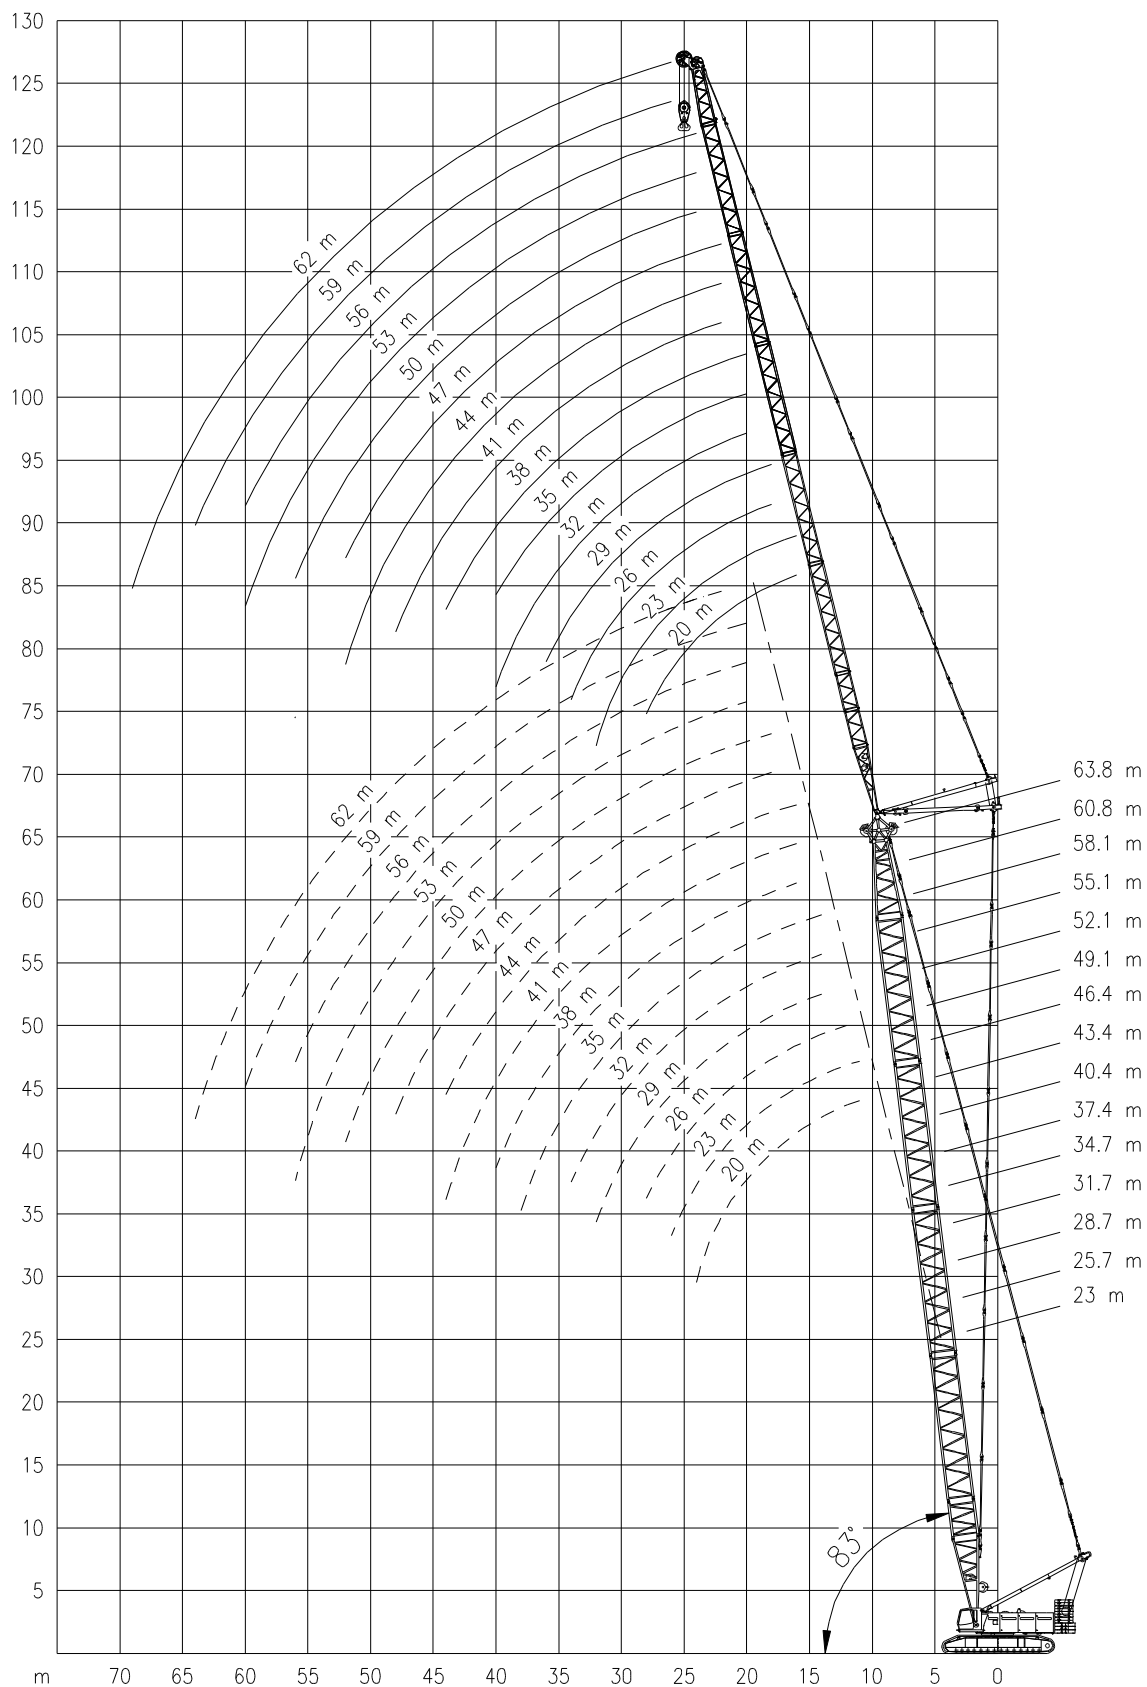




LIEBHERR LR 1250


Lifting capacities
Capacités

250 TON

Tragfähigkeiten
Capacités



NDL 83°



	23.0 m														
	20m	23m	26m	29m	32m	35m	38m	41m	44m	47m	50m	53m	56m	59m	62m
	t	t	t	t	t	t	t	t	t	t	t	t	t	t	t
11.0	67.0	61.9	-	-	-	-	-	-	-	-	-	-	-	-	-
12.0	68.2	62.4	53.4	-	-	-	-	-	-	-	-	-	-	-	-
14.0	67.6	61.7	54.0	48.7	41.7	37.3	-	-	-	-	-	-	-	-	-
16.0	59.2	57.9	54.7	47.2	41.1	36.8	32.7	28.8	24.7	-	-	-	-	-	-
18.0	51.5	51.3	50.6	45.5	39.8	35.0	31.8	28.1	24.1	21.5	18.1	-	-	-	-
20.0	45.0	44.8	44.9	43.3	38.4	33.2	30.7	27.1	23.6	20.9	18.6	16.6	14.2	12.5	-
22.0	39.6	39.7	39.7	39.6	36.5	31.6	29.6	26.2	23.1	20.2	18.1	16.2	13.8	12.3	10.2
24.0	29.9	35.6	35.6	35.5	34.6	30.1	28.8	25.3	22.6	19.6	18.1	15.8	13.7	12.0	10.0
26.0	-	30.2	32.2	32.1	32.1	28.6	27.9	24.6	22.1	19.0	17.8	15.5	13.4	11.7	9.9
28.0	-	-	28.4	29.2	29.3	27.1	27.1	23.9	21.6	18.5	17.5	15.1	13.2	11.4	9.7
30.0	-	-	-	26.8	26.9	25.5	26.3	23.2	21.2	18.1	17.1	14.8	12.9	11.1	9.5
32.0	-	-	-	22.6	24.2	23.4	24.5	22.5	20.7	17.7	16.7	14.5	12.6	10.8	9.4
34.0	-	-	-	-	21.1	21.3	22.7	21.7	20.2	17.2	16.3	14.2	12.3	10.6	9.2
36.0	-	-	-	-	-	19.3	20.8	20.1	19.1	16.8	15.8	13.9	12.0	10.3	9.1
38.0	-	-	-	-	-	17.2	18.7	18.5	17.9	16.3	15.4	13.6	11.7	10.1	8.9
40.0	-	-	-	-	-	-	16.5	16.9	16.8	15.4	14.6	13.3	11.4	9.8	8.6
44.0	-	-	-	-	-	-	-	13.8	13.9	13.6	13.2	12.4	10.7	9.4	8.1
48.0	-	-	-	-	-	-	-	-	-	11.8	11.5	11.2	9.9	8.9	7.7
52.0	-	-	-	-	-	-	-	-	-	-	9.7	10.0	9.0	8.4	7.4
56.0	-	-	-	-	-	-	-	-	-	-	-	8.9	7.9	7.9	7.0
60.0	-	-	-	-	-	-	-	-	-	-	-	-	-	7.4	6.3
64.0	-	-	-	-	-	-	-	-	-	-	-	-	-	-	5.6
25.7 m															
11.0	65.7	-	-	-	-	-	-	-	-	-	-	-	-	-	-
12.0	66.5	58.9	52.5	-	-	-	-	-	-	-	-	-	-	-	-
14.0	66.0	59.3	52.6	46.6	41.0	-	-	-	-	-	-	-	-	-	-
16.0	57.9	56.6	51.7	45.8	40.4	35.7	31.7	27.5	-	-	-	-	-	-	-
18.0	51.5	50.6	49.5	44.6	39.1	34.3	31.0	27.1	23.7	21.1	18.6	-	-	-	-
20.0	45.0	44.8	44.6	42.8	37.7	32.7	30.1	26.3	22.9	20.5	18.4	16.1	14.1	12.1	-
22.0	39.9	39.9	39.8	39.7	35.9	31.1	29.2	25.5	22.2	19.9	18.1	15.8	14.0	12.0	10.3
24.0	33.1	35.8	35.7	35.6	34.1	29.6	28.4	24.7	21.6	19.3	17.7	15.5	13.7	11.7	10.1
26.0	-	31.3	32.3	32.2	32.0	28.0	27.6	24.0	21.0	18.8	17.4	15.1	13.3	11.5	9.9
28.0	-	-	29.2	29.3	29.1	26.5	26.8	23.4	20.5	18.3	17.1	14.8	13.0	11.2	9.7
30.0	-	-	24.3	26.9	26.7	24.9	26.1	22.8	20.0	17.9	16.8	14.5	12.7	10.9	9.5
32.0	-	-	-	23.4	24.5	23.1	24.6	22.2	19.6	17.5	16.4	14.2	12.4	10.6	9.3
34.0	-	-	-	-	21.7	21.3	22.7	21.5	19.1	17.1	16.1	14.0	12.2	10.4	9.1
36.0	-	-	-	-	19.0	19.4	21.0	20.0	18.6	16.7	15.8	13.7	11.9	10.2	9.0
38.0	-	-	-	-	-	17.6	19.1	18.6	17.5	16.3	15.5	13.4	11.7	10.0	8.8
40.0	-	-	-	-	-	-	17.0	17.1	16.4	15.5	15.2	13.2	11.4	9.7	8.6
44.0	-	-	-	-	-	-	-	14.1	14.2	13.8	13.6	12.4	10.9	9.3	8.3
48.0	-	-	-	-	-	-	-	-	11.5	12.1	12.0	11.3	10.1	8.9	8.0
52.0	-	-	-	-	-	-	-	-	-	-	10.5	10.2	9.4	8.4	7.7
56.0	-	-	-	-	-	-	-	-	-	-	-	9.1	8.7	8.0	7.3
60.0	-	-	-	-	-	-	-	-	-	-	-	-	-	7.6	7.0
64.0	-	-	-	-	-	-	-	-	-	-	-	-	-	-	6.7
65.0	-	-	-	-	-	-	-	-	-	-	-	-	-	-	6.6
28.7 m															
11.0	63.3	-	-	-	-	-	-	-	-	-	-	-	-	-	-
12.0	63.9	56.8	-	-	-	-	-	-	-	-	-	-	-	-	-
14.0	64.3	56.8	51.3	45.2	39.9	-	-	-	-	-	-	-	-	-	-
16.0	56.4	55.4	50.6	44.9	39.6	35.0	31.1	26.9	-	-	-	-	-	-	-
18.0	50.3	49.4	48.4	44.0	38.4	33.9	30.6	26.7	23.5	20.9	-	-	-	-	-
20.0	44.6	44.6	43.6	42.4	37.1	32.5	29.8	26.0	22.8	20.4	18.2	16.0	13.9	-	-
22.0	39.5	39.5	39.4	39.0	35.5	31.1	28.9	25.3	22.1	19.8	17.9	15.6	13.8	11.8	10.2
24.0	34.5	35.4	35.3	35.1	33.8	29.6	28.2	24.5	21.5	19.2	17.6	15.3	13.5	11.6	10.0
26.0	-	32.0	31.9	31.8	31.8	28.2	27.5	23.9	20.9	18.7	17.2	15.0	13.2	11.3	9.8
28.0	-	-	29.1	28.9	29.0	26.7	26.8	23.3	20.4	18.2	16.9	14.7	12.9	11.1	9.6
30.0	-	-	25.4	26.5	26.6	25.3	26.1	22.7	19.9	17.8	16.6	14.4	12.6	10.9	9.4
32.0	-	-	-	24.1	24.5	23.5	24.2	22.1	19.5	17.4	16.3	14.2	12.4	10.6	9.2
34.0	-	-	-	-	22.3	21.7	22.4	21.5	19.0	17.1	16.0	13.9	12.1	10.4	9.0
36.0	-	-	-	-	19.6	19.9	20.8	20.2	18.5	16.7	15.7	13.6	11.9	10.2	8.9
38.0	-	-	-	-	-	18.2	19.4	18.8	17.6	16.3	15.4	13.4	11.6	9.9	8.7
40.0	-	-	-	-	-	-	17.5	17.4	16.6	15.6	15.1	13.1	11.3	9.7	8.6
44.0	-	-	-	-	-	-	-	14.5	14.5	13.9	13.8	12.4	10.8	9.3	8.3
48.0	-	-	-	-	-	-	-	-	12.4	12.4	12.3	11.4	10.2	8.9	8.0
52.0	-	-	-	-	-	-	-	-	-	-	10.8	10.3	9.5	8.5	7.7
56.0	-	-	-	-	-	-	-	-	-	-	-	9.3	8.9	8.1	7.4
60.0	-	-	-	-	-	-	-	-	-	-	-	-	-	7.7	7.1
64.0	-	-	-	-	-	-	-	-	-	-	-	-	-	-	6.9
65.0	-	-	-	-	-	-	-	-	-	-	-	-	-	-	6.8




LIEBHERR LR 1250


Lifting capacities
Capacités

250 TON

Tragfähigkeiten
Capacités



NDL 83°



	31.7 m														
	20m	23m	26m	29m	32m	35m	38m	41m	44m	47m	50m	53m	56m	59m	62m
	t	t	t	t	t	t	t	t	t	t	t	t	t	t	t
12.0	61.1	55.2	-	-	-	-	-	-	-	-	-	-	-	-	-
14.0	62.2	55.7	49.5	43.8	-	-	-	-	-	-	-	-	-	-	-
16.0	55.2	54.0	49.3	43.7	38.9	34.3	30.5	-	-	-	-	-	-	-	-
18.0	49.3	48.2	47.2	43.2	37.9	33.6	30.1	26.3	23.1	20.4	-	-	-	-	-
20.0	44.5	43.5	42.6	41.8	36.7	32.2	29.4	25.7	22.5	20.1	17.8	15.6	13.6	-	-
22.0	39.5	39.6	39.1	38.4	35.3	30.9	28.7	25.0	21.9	19.6	17.5	15.4	13.5	11.6	9.9
24.0	35.4	35.5	35.3	35.2	33.7	29.5	28.0	24.4	21.3	19.0	17.2	15.1	13.2	11.4	9.8
26.0	-	32.1	31.9	31.8	31.6	28.1	27.3	23.8	20.7	18.5	16.9	14.8	13.0	11.1	9.6
28.0	-	27.8	29.1	29.0	28.8	26.7	26.6	23.2	20.2	18.0	16.6	14.5	12.7	10.9	9.4
30.0	-	-	26.3	26.6	26.7	25.4	25.9	22.6	19.8	17.7	16.3	14.2	12.4	10.6	9.2
32.0	-	-	-	24.5	24.6	23.7	24.3	22.0	19.3	17.3	16.1	13.9	12.2	10.4	9.1
34.0	-	-	-	-	22.6	22.0	22.5	21.5	18.9	16.9	15.8	13.7	11.9	10.2	8.9
36.0	-	-	-	-	20.2	20.3	20.8	20.4	18.4	16.6	15.5	13.4	11.7	10.0	8.7
38.0	-	-	-	-	-	18.6	19.3	19.0	17.6	16.2	15.2	13.2	11.4	9.8	8.6
40.0	-	-	-	-	-	14.6	17.9	17.6	16.6	15.6	15.0	12.9	11.2	9.6	8.4
44.0	-	-	-	-	-	-	-	14.9	14.6	14.0	13.7	12.3	10.7	9.2	8.1
48.0	-	-	-	-	-	-	-	-	12.6	12.4	12.3	11.3	10.1	8.8	7.8
52.0	-	-	-	-	-	-	-	-	-	-	10.8	10.3	9.4	8.4	7.5
56.0	-	-	-	-	-	-	-	-	-	-	-	9.3	8.8	8.0	7.3
60.0	-	-	-	-	-	-	-	-	-	-	-	-	6.6	7.7	7.0
64.0	-	-	-	-	-	-	-	-	-	-	-	-	-	-	6.8
34.7 m															
12.0	56.4	-	-	-	-	-	-	-	-	-	-	-	-	-	-
14.0	57.3	53.8	46.6	42.6	-	-	-	-	-	-	-	-	-	-	-
16.0	53.5	52.6	47.1	42.6	36.8	33.4	28.6	-	-	-	-	-	-	-	-
18.0	47.8	47.0	46.0	42.0	36.8	33.0	28.6	25.8	22.7	-	-	-	-	-	-
20.0	43.1	42.5	41.6	41.1	36.8	31.9	28.2	25.3	21.8	19.9	16.9	15.3	-	-	-
22.0	39.0	38.7	37.9	37.5	35.9	30.8	27.8	24.7	21.7	19.4	16.9	15.2	12.7	11.5	-
24.0	34.9	35.0	34.8	34.4	33.7	29.5	27.2	24.1	21.5	18.9	16.7	14.9	12.7	11.3	9.4
26.0	-	31.7	31.5	31.6	31.1	28.1	26.6	23.5	21.1	18.4	16.2	14.6	12.6	11.0	9.2
28.0	-	28.6	28.7	28.8	28.6	26.8	26.0	23.0	20.6	17.9	16.0	14.3	12.4	10.8	8.9
30.0	-	-	26.3	26.4	26.3	25.5	25.3	22.4	20.0	17.6	15.8	14.0	12.1	10.5	9.0
32.0	-	-	-	24.4	24.2	23.9	24.2	21.9	19.3	17.2	15.6	13.8	11.8	10.3	9.0
34.0	-	-	-	21.9	22.4	22.2	22.4	21.3	18.6	16.8	15.1	13.5	11.5	10.1	8.8
36.0	-	-	-	-	20.9	20.6	20.8	20.4	17.9	16.5	14.6	13.3	11.3	9.9	8.7
38.0	-	-	-	-	-	18.9	19.4	19.1	17.4	16.1	14.1	13.0	11.0	9.7	8.6
40.0	-	-	-	-	-	17.3	18.1	17.8	16.8	15.6	13.7	12.8	10.8	9.5	8.4
44.0	-	-	-	-	-	-	-	15.2	15.2	14.1	13.1	12.2	10.4	9.1	8.1
48.0	-	-	-	-	-	-	-	-	12.4	12.7	12.4	11.3	9.8	8.7	7.7
52.0	-	-	-	-	-	-	-	-	-	-	10.6	10.4	9.3	8.4	7.4
56.0	-	-	-	-	-	-	-	-	-	-	-	9.6	8.4	8.1	7.2
60.0	-	-	-	-	-	-	-	-	-	-	-	-	7.5	7.8	6.8
64.0	-	-	-	-	-	-	-	-	-	-	-	-	-	-	6.2
67.0	-	-	-	-	-	-	-	-	-	-	-	-	-	-	5.7
37.4 m															
12.0	55.1	-	-	-	-	-	-	-	-	-	-	-	-	-	-
14.0	55.7	50.2	45.1	-	-	-	-	-	-	-	-	-	-	-	-
16.0	52.5	51.1	45.5	40.5	35.9	31.9	-	-	-	-	-	-	-	-	-
18.0	46.9	45.9	45.0	40.1	35.6	31.9	28.1	24.9	22.0	-	-	-	-	-	-
20.0	42.7	41.5	41.0	39.6	35.1	31.0	27.6	24.6	21.8	19.4	17.1	14.8	-	-	-
22.0	39.0	38.1	37.4	36.7	34.2	30.0	27.1	24.0	21.2	19.0	16.9	14.7	12.9	11.0	-
24.0	35.2	35.1	34.3	33.7	32.8	28.9	26.7	23.5	20.6	18.5	16.6	14.4	12.7	10.9	9.4
26.0	14.6	31.7	31.6	31.2	30.5	27.6	26.1	23.0	20.1	18.0	16.3	14.2	12.4	10.7	9.2
28.0	-	28.9	28.8	28.6	28.6	26.4	25.5	22.5	19.6	17.6	16.1	13.9	12.1	10.5	9.1
30.0	-	-	26.4	26.3	26.4	25.2	24.9	22.0	19.2	17.2	15.8	13.7	11.9	10.2	8.9
32.0	-	-	-	14.6	24.2	24.0	23.8	24.0	21.5	18.8	16.9	15.5	13.4	11.6	10.0
34.0	-	-	-	-	22.4	22.3	22.1	22.3	21.0	18.4	16.5	15.2	13.1	11.4	9.8
36.0	-	-	-	-	-	20.7	20.5	20.7	20.3	18.0	16.2	14.9	12.9	11.2	9.6
38.0	-	-	-	-	-	-	19.1	19.3	19.0	17.4	15.8	14.6	12.6	11.0	9.5
40.0	-	-	-	-	-	17.6	18.1	17.8	16.6	15.4	14.3	12.3	10.7	9.3	8.2
44.0	-	-	-	-	-	-	-	15.3	14.8	14.1	13.4	11.8	10.3	8.9	7.9
48.0	-	-	-	-	-	-	-	-	13.1	12.7	12.2	11.1	9.8	8.6	7.6
52.0	-	-	-	-	-	-	-	-	-	7.8	11.1	10.3	9.4	8.3	7.4
56.0	-	-	-	-	-	-	-	-	-	-	-	9.6	8.9	8.1	7.2
60.0	-	-	-	-	-	-	-	-	-	-	-	-	8.5	7.8	7.1
64.0	-	-	-	-	-	-	-	-	-	-	-	-	-	-	6.9
66.0	-	-	-	-	-	-	-	-	-	-	-	-	-	-	6.9




LIEBHERR LR 1250


Lifting capacities
Capacités

250 TON

Tragfähigkeiten
Capacités



NDL 83°



	40.4 m														
	20m	23m	26m	29m	32m	35m	38m	41m	44m	47m	50m	53m	56m	59m	62m
	t	t	t	t	t	t	t	t	t	t	t	t	t	t	t
13.0	52.9	47.9	-	-	-	-	-	-	-	-	-	-	-	-	-
14.0	53.4	48.1	43.3	-	-	-	-	-	-	-	-	-	-	-	-
16.0	51.1	48.9	43.6	38.9	34.8	31.0	-	-	-	-	-	-	-	-	-
18.0	45.7	44.8	43.8	39.0	34.7	31.0	27.4	24.3	-	-	-	-	-	-	-
20.0	41.4	40.5	39.6	38.8	34.3	30.3	27.0	24.1	21.4	19.0	16.7	-	-	-	-
22.0	37.8	36.9	36.2	35.5	33.6	29.6	26.7	23.7	20.9	18.7	16.6	14.4	12.7	10.9	-
24.0	34.7	34.0	33.2	32.6	32.2	28.6	26.3	23.2	20.4	18.3	16.3	14.2	12.5	10.8	9.2
26.0	31.4	31.3	30.7	30.1	29.8	27.4	25.7	22.8	19.9	17.8	16.0	13.9	12.2	10.5	9.1
28.0	-	28.5	28.3	28.0	27.7	26.2	25.2	22.3	19.4	17.4	15.7	13.7	12.0	10.3	8.9
30.0	-	-	25.9	25.8	25.8	25.1	24.6	21.8	19.0	17.0	15.5	13.4	11.7	10.1	8.8
32.0	-	-	23.9	23.8	23.9	23.7	23.5	21.3	18.6	16.7	15.2	13.2	11.4	9.9	8.6
34.0	-	-	-	22.0	22.1	21.9	22.1	20.8	18.2	16.4	14.9	12.9	11.2	9.7	8.5
36.0	-	-	-	-	20.6	20.4	20.5	20.2	17.9	16.1	14.6	12.6	10.9	9.5	8.3
38.0	-	-	-	-	-	19.0	19.2	19.0	17.4	15.7	14.3	12.4	10.7	9.3	8.2
40.0	-	-	-	-	-	17.8	17.9	17.8	16.6	15.4	14.0	12.1	10.5	9.1	8.0
44.0	-	-	-	-	-	-	-	15.5	14.9	14.1	13.2	11.6	10.0	8.8	7.8
48.0	-	-	-	-	-	-	-	-	13.3	12.8	12.2	10.9	9.6	8.4	7.5
52.0	-	-	-	-	-	-	-	-	-	11.6	11.2	10.3	9.2	8.2	7.3
56.0	-	-	-	-	-	-	-	-	-	-	-	9.7	8.9	8.0	7.2
60.0	-	-	-	-	-	-	-	-	-	-	-	-	8.6	7.8	7.0
64.0	-	-	-	-	-	-	-	-	-	-	-	-	-	-	6.9
66.0	-	-	-	-	-	-	-	-	-	-	-	-	-	-	6.9
	43.4 m														
	20m	23m	26m	29m	32m	35m	38m	41m	44m	47m	50m	53m	56m	59m	62m
	t	t	t	t	t	t	t	t	t	t	t	t	t	t	t
14.0	50.8	46.0	-	-	-	-	-	-	-	-	-	-	-	-	-
16.0	49.7	46.7	42.0	37.6	33.7	-	-	-	-	-	-	-	-	-	-
18.0	44.5	43.6	42.4	37.7	33.7	30.0	26.7	23.7	-	-	-	-	-	-	-
20.0	40.6	39.7	38.9	37.7	33.4	29.6	26.4	23.5	20.9	18.5	16.3	-	-	-	-
22.0	37.1	36.3	35.5	34.9	33.0	28.9	26.0	23.1	20.5	18.3	16.2	14.1	12.3	-	-
24.0	34.2	33.4	32.7	32.1	31.4	28.1	25.6	22.8	20.0	17.9	15.9	13.9	12.2	10.5	9.0
26.0	31.4	30.9	30.2	29.7	29.1	27.0	25.1	22.5	19.6	17.5	15.6	13.7	11.9	10.3	8.9
28.0	-	28.5	28.2	27.9	27.3	25.9	24.5	21.9	19.1	17.1	15.4	13.4	11.7	10.1	8.7
30.0	-	-	26.3	25.8	25.5	24.6	23.9	21.4	18.7	16.7	15.1	13.1	11.4	9.9	8.6
32.0	-	-	24.2	23.9	23.6	23.1	23.0	20.9	18.2	16.4	14.8	12.9	11.1	9.6	8.4
34.0	-	-	-	22.1	21.9	21.7	21.6	20.3	17.8	16.0	14.5	12.6	10.9	9.4	8.2
36.0	-	-	-	-	20.4	20.2	20.4	19.8	17.3	15.7	14.2	12.3	10.7	9.2	8.1
38.0	-	-	-	-	19.0	18.8	19.0	18.8	16.9	15.3	13.9	12.1	10.4	9.1	8.0
40.0	-	-	-	-	-	17.6	17.8	17.6	16.2	15.0	13.6	11.8	10.2	8.9	7.8
44.0	-	-	-	-	-	-	15.6	15.6	14.7	13.8	12.9	11.2	9.7	8.5	7.6
48.0	-	-	-	-	-	-	-	-	13.2	12.7	12.0	10.7	9.3	8.2	7.3
52.0	-	-	-	-	-	-	-	-	-	11.6	11.0	10.1	9.0	8.0	7.1
56.0	-	-	-	-	-	-	-	-	-	-	-	9.6	8.7	7.8	7.0
60.0	-	-	-	-	-	-	-	-	-	-	-	-	8.4	7.6	6.9
64.0	-	-	-	-	-	-	-	-	-	-	-	-	-	7.5	6.8
67.0	-	-	-	-	-	-	-	-	-	-	-	-	-	-	6.7
	46.4 m														
	20m	23m	26m	29m	32m	35m	38m	41m	44m	47m	50m	53m	56m	59m	62m
	t	t	t	t	t	t	t	t	t	t	t	t	t	t	t
13.0	46.8	-	-	-	-	-	-	-	-	-	-	-	-	-	-
14.0	47.0	44.0	-	-	-	-	-	-	-	-	-	-	-	-	-
16.0	47.7	44.4	38.8	36.2	32.0	-	-	-	-	-	-	-	-	-	-
18.0	43.3	42.4	39.4	36.3	32.0	29.0	26.1	-	-	-	-	-	-	-	-
20.0	39.2	38.4	37.6	36.4	32.1	28.7	25.8	23.0	19.8	18.0	-	-	-	-	-
22.0	35.8	35.1	34.3	34.0	31.9	28.2	25.4	22.6	19.0	17.9	15.2	13.8	11.7	-	-
24.0	33.0	32.3	31.5	31.3	30.6	27.7	25.1	22.3	18.3	17.6	14.6	13.6	11.6	10.3	8.8
26.0	30.7	29.9	29.2	28.9	28.3	26.6	24.5	22.0	17.8	17.2	14.3	13.3	11.3	10.1	8.4
28.0	-	27.9	27.1	26.9	26.3	25.6	23.8	21.4	17.4	16.9	14.1	13.1	11.0	9.9	8.3
30.0	-	-	25.4	25.1	24.6	24.0	23.1	20.8	17.1	16.5	13.7	12.8	10.8	9.7	8.2
32.0	-	-	23.5	23.6	23.0	22.5	22.3	20.2	16.5	16.1	13.4	12.5	10.5	9.4	8.0
34.0	-	-	-	21.9	21.7	21.1	21.1	19.5	16.0	15.7	13.1	12.2	10.2	9.2	7.9
36.0	-	-	-	-	20.2	19.9	19.8	18.9	15.4	15.2	12.9	11.9	9.9	9.0	7.8
38.0	-	-	-	-	18.9	18.7	18.8	18.1	14.9	14.8	12.7	11.6	9.7	8.9	7.8
40.0	-	-	-	-	-	17.5	17.7	17.2	14.4	14.4	12.4	11.3	9.5	8.7	7.7
44.0	-	-	-	-	-	-	15.6	15.4	13.4	13.5	11.6	10.8	9.1	8.3	7.5
48.0	-	-	-	-	-	-	-	-	12.3	12.5	10.8	10.3	8.7	8.0	7.3
52.0	-	-	-	-	-	-	-	-	-	11.6	10.0	9.9	8.4	7.7	7.0
56.0	-	-	-	-	-	-	-	-	-	-	9.4	7.9	7.5	6.7	6.4
60.0	-	-	-	-	-	-	-	-	-	-	-	7.4	7.3	6.4	5.9
64.0	-	-	-	-	-	-	-	-	-	-	-	-	-	7.1	5.9
67.0	-	-	-	-	-	-	-	-	-	-	-	-	-	-	5.6




LIEBHERR LR 1250


Lifting capacities
Capacités

250 TON

Tragfähigkeiten
Capacités



NDL 83°



	49.1 m														
	20m	23m	26m	29m	32m	35m	38m	41m	44m	47m	50m	53m	56m	59m	62m
	t	t	t	t	t	t	t	t	t	t	t	t	t	t	t
14.0	44.6	-	-	-	-	-	-	-	-	-	-	-	-	-	-
16.0	45.1	41.4	37.4	33.9	-	-	-	-	-	-	-	-	-	-	-
18.0	42.3	41.5	37.6	34.0	30.7	27.4	24.7	-	-	-	-	-	-	-	-
20.0	38.6	37.8	37.0	34.1	30.6	27.3	24.5	21.9	19.6	17.4	-	-	-	-	-
22.0	35.3	34.6	33.8	33.2	30.5	26.8	24.2	21.6	19.4	17.3	15.0	13.2	-	-	-
24.0	32.6	31.8	31.1	30.6	29.7	26.3	23.9	21.3	19.0	16.9	14.9	13.1	11.5	9.9	8.5
26.0	30.2	29.5	28.8	28.3	27.7	25.4	23.4	21.0	18.6	16.6	14.6	12.9	11.3	9.7	8.5
28.0	-	27.2	26.8	26.3	25.7	24.5	22.6	20.5	18.3	16.2	14.4	12.6	11.0	9.6	8.3
30.0	-	25.2	25.1	24.6	24.0	23.6	21.8	19.8	17.7	15.8	14.1	12.4	10.8	9.4	8.2
32.0	-	-	23.6	23.1	22.5	22.3	21.1	19.1	17.1	15.4	13.8	12.1	10.6	9.2	8.0
34.0	-	-	-	21.8	21.2	21.0	20.3	18.4	16.5	15.0	13.5	11.8	10.3	9.0	7.9
36.0	-	-	-	20.2	20.0	19.8	19.4	17.7	15.9	14.6	13.2	11.5	10.1	8.8	7.7
38.0	-	-	-	-	18.7	18.8	18.4	17.0	15.3	14.1	12.9	11.3	9.9	8.7	7.6
40.0	-	-	-	-	-	17.6	17.4	16.3	14.7	13.7	12.6	11.0	9.6	8.5	7.5
44.0	-	-	-	-	-	-	15.5	15.0	13.7	12.9	11.9	10.4	9.2	8.1	7.2
48.0	-	-	-	-	-	-	-	-	12.8	12.0	11.2	9.9	8.7	7.8	7.0
52.0	-	-	-	-	-	-	-	-	-	11.2	10.4	9.5	8.4	7.5	6.7
56.0	-	-	-	-	-	-	-	-	-	-	9.7	9.0	8.2	7.3	6.6
60.0	-	-	-	-	-	-	-	-	-	-	-	-	7.9	7.1	6.5
64.0	-	-	-	-	-	-	-	-	-	-	-	-	-	6.9	6.3
68.0	-	-	-	-	-	-	-	-	-	-	-	-	-	-	3.7
52.1 m															
14.0	42.4	-	-	-	-	-	-	-	-	-	-	-	-	-	-
16.0	42.7	39.1	35.7	32.5	-	-	-	-	-	-	-	-	-	-	-
18.0	41.1	39.2	35.6	32.5	29.4	26.4	-	-	-	-	-	-	-	-	-
20.0	37.2	36.8	35.5	32.5	29.4	26.3	23.8	21.3	18.9	-	-	-	-	-	-
22.0	34.1	33.6	32.9	32.3	29.3	26.0	23.5	20.9	18.7	16.6	14.6	12.7	-	-	-
24.0	31.4	31.0	30.3	29.8	28.7	25.6	23.2	20.7	18.3	16.4	14.4	12.6	11.1	9.5	8.2
26.0	29.1	28.7	28.1	27.5	26.9	24.8	22.8	20.4	17.8	16.0	14.2	12.4	10.9	9.4	8.2
28.0	-	26.8	26.1	25.6	25.0	23.9	22.0	19.9	17.4	15.7	13.9	12.2	10.7	9.2	8.0
30.0	-	25.1	24.4	23.9	23.4	23.0	21.1	19.1	16.9	15.4	13.7	11.9	10.5	9.1	7.9
32.0	-	-	23.0	22.5	21.9	21.8	20.2	18.3	16.3	15.0	13.4	11.7	10.2	8.9	7.8
34.0	-	-	-	21.2	20.6	20.5	19.3	17.4	15.8	14.5	13.0	11.4	10.0	8.7	7.6
36.0	-	-	-	20.1	19.5	19.3	18.5	16.6	15.3	14.1	12.7	11.1	9.8	8.5	7.5
38.0	-	-	-	-	18.5	18.3	17.6	15.9	14.7	13.6	12.4	10.8	9.5	8.4	7.4
40.0	-	-	-	-	-	17.3	16.7	15.2	14.2	13.2	12.0	10.6	9.3	8.2	7.2
44.0	-	-	-	-	-	-	14.9	13.9	13.1	12.3	11.4	10.0	8.8	7.8	6.9
48.0	-	-	-	-	-	-	-	-	12.0	11.4	10.6	9.5	8.4	7.5	6.6
52.0	-	-	-	-	-	-	-	-	-	10.5	9.9	9.0	8.0	7.2	6.4
56.0	-	-	-	-	-	-	-	-	-	-	9.2	8.6	7.7	6.9	6.2
60.0	-	-	-	-	-	-	-	-	-	-	-	-	7.5	6.7	6.1
64.0	-	-	-	-	-	-	-	-	-	-	-	-	-	6.5	5.9
68.0	-	-	-	-	-	-	-	-	-	-	-	-	-	-	5.9
55.1 m															
15.0	40.6	37.2	-	-	-	-	-	-	-	-	-	-	-	-	-
16.0	40.6	37.3	33.1	-	-	-	-	-	-	-	-	-	-	-	-
18.0	40.2	36.9	33.1	31.2	28.2	25.5	-	-	-	-	-	-	-	-	-
20.0	36.5	35.8	33.0	30.9	28.1	25.5	23.0	20.7	17.8	-	-	-	-	-	-
22.0	33.4	32.7	32.0	30.5	27.8	25.3	22.7	20.5	16.9	16.3	13.5	-	-	-	-
24.0	30.8	30.1	29.5	28.9	27.0	25.1	22.4	20.0	16.8	16.1	13.4	12.4	10.2	9.4	-
26.0	27.3	27.9	27.3	26.8	26.1	24.4	22.1	19.6	16.5	15.7	13.0	12.2	10.4	9.3	7.8
28.0	22.9	26.0	25.4	24.9	24.4	23.4	21.3	19.1	16.2	15.2	12.7	11.9	10.5	9.1	7.8
30.0	-	24.4	23.8	23.3	22.7	22.3	20.4	18.4	15.8	14.8	12.4	11.7	10.1	8.9	7.8
32.0	-	-	22.4	21.9	21.3	21.2	19.5	17.7	15.4	14.4	11.9	11.4	9.7	8.7	7.7
34.0	-	-	10.5	20.6	20.0	19.9	18.6	17.0	14.8	13.9	11.4	11.1	9.4	8.5	7.6
36.0	-	-	-	19.5	18.9	18.8	17.8	16.3	14.2	13.5	11.2	10.8	9.1	8.4	7.5
38.0	-	-	-	-	18.0	17.8	16.9	15.6	13.7	13.0	11.1	10.5	8.8	8.2	7.3
40.0	-	-	-	-	8.3	16.8	16.0	14.9	12.9	12.6	10.9	10.3	8.5	8.0	7.2
44.0	-	-	-	-	-	-	14.2	13.5	11.5	11.7	10.3	9.7	8.0	7.7	6.8
48.0	-	-	-	-	-	-	-	12.2	10.0	10.8	9.2	9.2	7.5	7.4	6.5
52.0	-	-	-	-	-	-	-	-	-	10.0	8.3	8.7	7.0	7.1	6.1
56.0	-	-	-	-	-	-	-	-	-	-	7.5	8.3	6.7	6.8	5.8
60.0	-	-	-	-	-	-	-	-	-	-	-	4.3	6.6	6.5	5.5
64.0	-	-	-	-	-	-	-	-	-	-	-	-	-	6.3	5.2
68.0	-	-	-	-	-	-	-	-	-	-	-	-	-	-	5.0




LIEBHERR LR 1250


Lifting capacities
Capacités

250 TON

Tragfähigkeiten
Capacités



NDL 83°



	58.1 m														
	20m	23m	26m	29m	32m	35m	38m	41m	44m	47m	50m	53m	56m	59m	62m
	t	t	t	t	t	t	t	t	t	t	t	t	t	t	t
15.0	38.1	-	-	-	-	-	-	-	-	-	-	-	-	-	-
16.0	38.1	35.2	32.4	-	-	-	-	-	-	-	-	-	-	-	-
18.0	37.5	34.6	32.3	29.7	27.0	-	-	-	-	-	-	-	-	-	-
20.0	35.1	33.6	31.5	29.2	26.8	24.4	22.3	19.9	-	-	-	-	-	-	-
22.0	32.1	31.6	30.3	28.6	26.3	24.0	22.0	19.8	17.7	15.6	13.7	-	-	-	-
24.0	29.6	29.3	28.6	27.3	25.7	23.6	21.6	19.4	17.4	15.4	13.6	11.9	10.4	-	-
26.0	27.5	27.2	26.5	25.8	24.6	23.0	21.1	18.8	16.9	15.1	13.4	11.8	10.3	9.0	7.8
28.0	25.7	25.3	24.7	24.2	23.4	22.0	20.4	18.3	16.4	14.7	13.1	11.5	10.1	8.9	7.7
30.0	-	23.7	23.1	22.6	22.1	21.0	19.5	17.6	15.9	14.4	12.8	11.3	9.9	8.7	7.6
32.0	-	-	21.7	21.2	20.7	20.0	18.7	16.9	15.3	13.9	12.5	11.0	9.7	8.6	7.5
34.0	-	-	20.5	20.0	19.5	19.0	17.8	16.2	14.7	13.5	12.1	10.8	9.5	8.4	7.3
36.0	-	-	-	18.9	18.4	18.0	16.9	15.5	14.1	13.0	11.7	10.5	9.3	8.2	7.2
38.0	-	-	-	-	17.4	16.9	16.0	14.8	13.5	12.5	11.4	10.2	9.1	8.0	7.1
40.0	-	-	-	-	16.6	15.9	15.1	14.1	12.9	12.0	11.0	9.9	8.8	7.9	7.0
44.0	-	-	-	-	-	-	13.3	12.8	11.8	11.1	10.2	9.4	8.3	7.5	6.7
48.0	-	-	-	-	-	-	-	11.6	10.8	10.3	9.6	8.8	7.9	7.1	6.4
52.0	-	-	-	-	-	-	-	-	9.5	9.1	8.3	7.5	6.8	6.2	5.6
56.0	-	-	-	-	-	-	-	-	-	8.5	7.8	7.2	6.5	6.0	5.4
60.0	-	-	-	-	-	-	-	-	-	-	7.3	6.8	6.3	5.8	5.3
64.0	-	-	-	-	-	-	-	-	-	-	-	6.1	5.6	5.1	4.6
68.0	-	-	-	-	-	-	-	-	-	-	-	-	-	-	4.0
69.0	-	-	-	-	-	-	-	-	-	-	-	-	-	-	4.0
	60.8 m														
	20m	23m	26m	29m	32m	35m	38m	41m	44m	47m	50m	53m	56m	59m	62m
	t	t	t	t	t	t	t	t	t	t	t	t	t	t	t
15.0	35.3	-	-	-	-	-	-	-	-	-	-	-	-	-	-
16.0	35.3	32.3	-	-	-	-	-	-	-	-	-	-	-	-	-
18.0	34.1	31.7	29.7	27.4	25.1	-	-	-	-	-	-	-	-	-	-
20.0	32.4	30.5	28.7	26.9	24.9	22.7	20.8	18.5	-	-	-	-	-	-	-
22.0	30.3	28.9	27.5	25.9	24.1	22.3	20.6	18.4	16.4	14.5	-	-	-	-	-
24.0	27.8	27.1	25.9	24.8	23.3	21.7	19.9	18.0	16.1	14.4	12.7	11.1	9.7	-	-
26.0	21.6	25.4	24.4	23.5	22.3	21.0	19.3	17.6	15.6	14.1	12.5	11.0	9.7	8.4	7.2
28.0	15.5	24.2	22.9	22.2	21.2	20.1	18.6	17.1	15.2	13.8	12.2	10.8	9.5	8.3	7.2
30.0	-	22.9	21.9	21.0	20.1	19.2	17.8	16.5	14.7	13.4	12.0	10.6	9.3	8.1	7.1
32.0	-	10.3	20.9	20.1	19.1	18.3	17.1	15.8	14.2	13.0	11.8	10.3	9.1	8.0	7.0
34.0	-	-	19.9	19.2	18.3	17.4	16.4	15.2	13.7	12.6	11.4	10.1	8.9	7.8	6.8
36.0	-	-	-	18.3	17.5	16.5	15.6	14.6	13.2	12.2	11.1	9.8	8.7	7.7	6.7
38.0	-	-	-	-	16.7	15.6	14.9	13.9	12.7	11.8	10.8	9.5	8.5	7.5	6.6
40.0	-	-	-	-	15.9	14.7	14.1	13.3	12.2	11.3	10.4	9.2	8.3	7.3	6.5
44.0	-	-	-	-	-	-	12.5	12.0	11.1	10.5	9.8	8.7	7.9	7.0	6.2
48.0	-	-	-	-	-	-	-	10.8	10.1	9.7	9.1	8.1	7.5	6.7	6.0
52.0	-	-	-	-	-	-	-	-	5.0	9.0	8.5	7.7	7.1	6.4	5.7
56.0	-	-	-	-	-	-	-	-	-	7.9	7.3	6.7	6.1	5.5	5.0
60.0	-	-	-	-	-	-	-	-	-	-	7.0	6.4	5.9	5.3	4.8
64.0	-	-	-	-	-	-	-	-	-	-	-	5.6	5.1	4.6	4.1
68.0	-	-	-	-	-	-	-	-	-	-	-	-	-	-	4.0
69.0	-	-	-	-	-	-	-	-	-	-	-	-	-	-	4.0
	63.8 m														
	20m	23m	26m	29m	32m	35m	38m	41m	44m	47m	50m	53m	56m	59m	62m
	t	t	t	t	t	t	t	t	t	t	t	t	t	t	t
16.0	32.2	30.5	-	-	-	-	-	-	-	-	-	-	-	-	-
18.0	31.9	30.1	27.8	25.8	-	-	-	-	-	-	-	-	-	-	-
20.0	30.6	28.4	27.4	25.4	23.6	21.6	19.8	-	-	-	-	-	-	-	-
22.0	28.7	26.8	26.1	24.2	23.2	21.2	19.4	17.5	15.4	13.8	-	-	-	-	-
24.0	26.8	25.2	24.6	22.9	22.3	20.4	18.8	17.2	14.6	13.7	11.8	10.6	9.2	-	-
26.0	25.4	23.6	23.3	21.8	20.8	19.5	18.2	16.7	14.1	13.5	11.4	10.5	9.2	8.1	7.0
28.0	24.1	22.4	22.0	20.6	19.7	18.6	17.6	16.3	13.6	13.1	11.1	10.3	8.8	8.0	7.0
30.0	-	21.3	20.9	19.4	18.7	17.8	16.9	15.7	13.1	12.7	10.7	10.1	8.6	7.8	7.0
32.0	-	20.2	19.8	18.5	17.8	16.9	16.1	15.1	12.5	12.3	10.4	9.8	8.3	7.7	6.8
34.0	-	-	19.1	17.7	17.1	16.1	15.4	14.5	12.0	11.9	10.1	9.6	8.1	7.5	6.5
36.0	-	-	-	16.9	16.4	15.2	14.7	13.9	11.4	11.4	9.7	9.4	7.9	7.4	6.3
38.0	-	-	-	-	15.7	14.4	14.0	13.2	10.8	11.0	9.3	9.1	7.7	7.2	6.3
40.0	-	-	-	-	15.1	13.6	13.2	12.6	10.3	10.6	9.0	8.9	7.4	7.0	6.2
44.0	-	-	-	-	-	-	11.6	11.3	9.5	9.7	8.3	8.4	6.9	6.7	5.9
48.0	-	-	-	-	-	-	-	10.0	8.7	9.1	7.6	7.9	6.4	6.3	5.6
52.0	-	-	-	-	-	-	-	-	8.0	8.5	6.9	7.5	6.0	6.0	5.2
56.0	-	-	-	-	-	-	-	-	-	-	6.3	7.1	5.7	5.8	4.9
60.0	-	-	-	-	-	-	-	-	-	-	-	6.6	5.3	5.5	4.6
64.0	-	-	-	-	-	-	-	-	-	-	-	-	-	5.3	4.3
68.0	-	-	-	-	-	-	-	-	-	-	-	-	-	-	4.0
69.0	-	-	-	-	-	-	-	-	-	-	-	-	-	-	4.0




LIEBHERR LR 1250

Working ranges
Portées

250 TON

Arbeitsbereiche
Werkbereich

NDL 75°

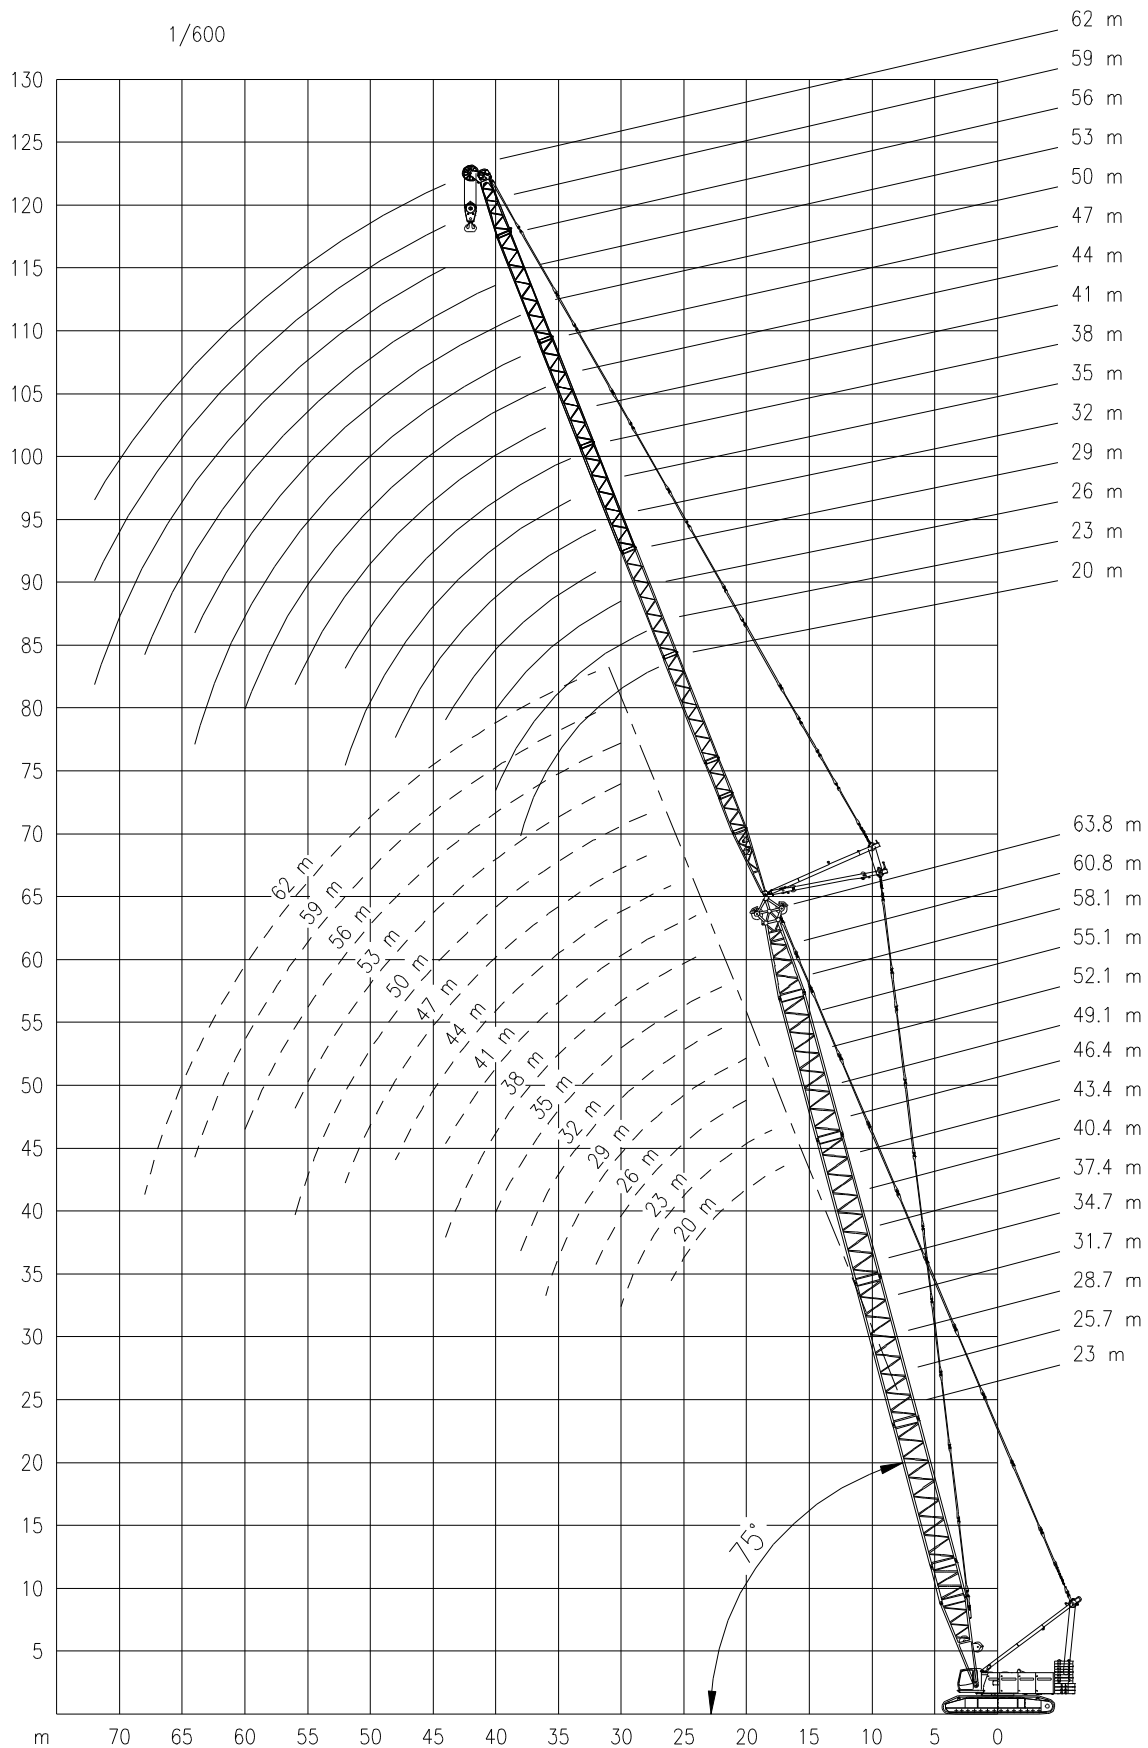




LIEBHERR LR 1250


Lifting capacities
Capacités

250 TON

Tragfähigkeiten
Capacités



NDL 75°



	23.0 m														
	20m	23m	26m	29m	32m	35m	38m	41m	44m	47m	50m	53m	56m	59m	62m
	t	t	t	t	t	t	t	t	t	t	t	t	t	t	t
17.0	53.0	-	-	-	-	-	-	-	-	-	-	-	-	-	-
18.0	49.5	49.0	-	-	-	-	-	-	-	-	-	-	-	-	-
20.0	43.2	43.0	42.9	42.5	-	-	-	-	-	-	-	-	-	-	-
22.0	38.3	38.1	38.1	38.0	37.7	32.3	-	-	-	-	-	-	-	-	-
24.0	34.3	34.1	34.2	34.0	33.8	32.2	29.4	25.1	-	-	-	-	-	-	-
26.0	31.0	30.9	30.9	30.8	30.6	30.4	29.0	25.1	22.2	-	-	-	-	-	-
28.0	-	28.2	28.2	28.0	28.1	27.8	27.6	24.5	21.8	19.0	17.8	-	-	-	-
30.0	-	25.8	25.8	25.7	25.8	25.6	25.4	23.8	21.4	18.6	17.5	14.9	12.7	-	-
32.0	-	-	23.8	23.7	23.8	23.6	23.4	23.1	21.0	18.2	17.1	14.8	12.6	11.0	9.1
34.0	-	-	-	22.0	22.0	21.8	21.7	21.5	20.6	17.8	16.8	14.4	12.5	10.9	9.0
36.0	-	-	-	20.5	20.5	20.3	20.2	20.0	19.8	17.4	16.5	14.2	12.5	10.7	8.9
38.0	-	-	-	-	19.1	19.0	18.8	18.7	18.5	17.1	16.2	13.9	12.2	10.4	8.7
40.0	-	-	-	-	-	17.8	17.6	17.5	17.3	16.7	15.9	13.7	11.9	10.2	8.6
44.0	-	-	-	-	-	-	15.6	15.4	15.2	15.1	14.9	13.2	11.3	9.7	8.3
48.0	-	-	-	-	-	-	-	-	13.6	13.4	13.3	12.8	10.7	9.4	7.9
52.0	-	-	-	-	-	-	-	-	-	12.1	11.9	11.7	10.1	9.0	7.7
56.0	-	-	-	-	-	-	-	-	-	-	10.4	10.5	9.4	8.7	7.4
60.0	-	-	-	-	-	-	-	-	-	-	-	-	8.4	8.4	7.2
64.0	-	-	-	-	-	-	-	-	-	-	-	-	-	8.1	6.6
68.0	-	-	-	-	-	-	-	-	-	-	-	-	-	-	6.6
25.7 m															
17.0	51.3	-	-	-	-	-	-	-	-	-	-	-	-	-	-
18.0	48.7	46.9	-	-	-	-	-	-	-	-	-	-	-	-	-
20.0	42.8	42.7	42.2	-	-	-	-	-	-	-	-	-	-	-	-
22.0	38.1	38.0	37.8	37.6	36.7	-	-	-	-	-	-	-	-	-	-
24.0	34.2	34.0	33.8	33.7	33.5	31.3	28.7	-	-	-	-	-	-	-	-
26.0	30.9	30.8	30.6	30.5	30.3	30.0	28.6	24.6	21.0	-	-	-	-	-	-
28.0	28.3	28.2	28.1	28.0	27.8	27.6	27.3	24.2	21.0	18.5	-	-	-	-	-
30.0	-	25.9	25.8	25.7	25.5	25.3	25.2	23.6	20.6	18.4	16.7	14.4	-	-	-
32.0	-	-	23.8	23.7	23.5	23.3	23.2	22.9	20.1	17.9	16.6	14.4	12.5	10.5	-
34.0	-	-	14.6	21.9	21.8	21.6	21.5	21.3	19.6	17.6	16.3	14.2	12.4	10.5	9.2
36.0	-	-	-	20.4	20.3	20.1	20.0	19.8	19.2	17.2	16.0	13.9	12.1	10.4	9.1
38.0	-	-	-	-	18.9	18.8	18.6	18.4	18.3	16.9	15.8	13.6	11.9	10.1	9.0
40.0	-	-	-	-	14.6	17.6	17.4	17.3	17.1	16.6	15.5	13.4	11.6	9.9	8.8
44.0	-	-	-	-	-	-	15.4	15.2	15.1	14.9	14.7	13.0	11.2	9.5	8.5
48.0	-	-	-	-	-	-	-	13.8	13.4	13.3	13.1	12.6	10.8	9.2	8.2
52.0	-	-	-	-	-	-	-	-	-	12.0	11.7	11.5	10.4	8.9	8.0
56.0	-	-	-	-	-	-	-	-	-	-	10.6	10.4	9.9	8.6	7.7
60.0	-	-	-	-	-	-	-	-	-	-	-	9.4	9.2	8.4	7.5
64.0	-	-	-	-	-	-	-	-	-	-	-	-	-	8.2	7.4
68.0	-	-	-	-	-	-	-	-	-	-	-	-	-	-	7.3
69.0	-	-	-	-	-	-	-	-	-	-	-	-	-	-	6.3
28.7 m															
18.0	47.1	-	-	-	-	-	-	-	-	-	-	-	-	-	-
20.0	42.3	41.8	40.4	-	-	-	-	-	-	-	-	-	-	-	-
22.0	37.5	37.5	37.2	36.5	-	-	-	-	-	-	-	-	-	-	-
24.0	33.6	33.6	33.4	33.2	32.8	30.8	-	-	-	-	-	-	-	-	-
26.0	30.3	30.4	30.2	30.1	29.8	29.5	28.3	24.2	-	-	-	-	-	-	-
28.0	27.7	27.7	27.5	27.4	27.2	27.2	27.1	24.2	20.7	18.2	-	-	-	-	-
30.0	-	25.4	25.2	25.1	24.9	25.0	24.8	23.5	20.5	18.2	16.4	14.2	-	-	-
32.0	-	14.6	23.3	23.1	22.9	23.0	22.9	22.7	20.0	17.9	16.4	14.2	12.3	-	-
34.0	-	-	21.6	21.4	21.2	21.3	21.2	21.0	19.6	17.5	16.2	14.1	12.3	10.3	9.0
36.0	-	-	-	19.9	19.8	19.8	19.7	19.5	19.1	17.1	15.9	13.8	12.0	10.3	9.0
38.0	-	-	-	-	18.4	18.5	18.3	18.2	18.0	16.8	15.7	13.5	11.8	10.1	8.9
40.0	-	-	-	-	17.5	17.3	17.2	17.0	16.8	16.5	15.5	13.3	11.6	9.9	8.7
44.0	-	-	-	-	-	-	15.2	15.0	14.8	14.7	14.5	12.9	11.1	9.4	8.4
48.0	-	-	-	-	-	-	-	13.6	13.4	13.0	12.8	12.6	10.8	9.1	8.1
52.0	-	-	-	-	-	-	-	-	12.0	11.9	11.5	11.3	10.4	8.9	7.9
56.0	-	-	-	-	-	-	-	-	-	-	10.6	10.1	9.9	8.6	7.7
60.0	-	-	-	-	-	-	-	-	-	-	-	9.2	9.0	8.4	7.5
64.0	-	-	-	-	-	-	-	-	-	-	-	-	-	8.0	7.4
68.0	-	-	-	-	-	-	-	-	-	-	-	-	-	-	7.1
69.0	-	-	-	-	-	-	-	-	-	-	-	-	-	-	6.9




LIEBHERR LR 1250



Lifting capacities
Capacités

250 TON

Tragfähigkeiten
Capacités



NDL 75°



	31.7 m														
	20m	23m	26m	29m	32m	35m	38m	41m	44m	47m	50m	53m	56m	59m	62m
	t	t	t	t	t	t	t	t	t	t	t	t	t	t	t
19.0	43.2	-	-	-	-	-	-	-	-	-	-	-	-	-	-
20.0	41.3	40.3	-	-	-	-	-	-	-	-	-	-	-	-	-
22.0	37.2	36.8	36.0	35.1	-	-	-	-	-	-	-	-	-	-	-
24.0	33.3	33.1	32.9	32.4	31.7	30.3	-	-	-	-	-	-	-	-	-
26.0	30.1	30.0	29.8	29.6	29.2	28.6	27.8	-	-	-	-	-	-	-	-
28.0	27.7	27.5	27.4	27.2	27.0	26.5	26.0	23.8	20.3	-	-	-	-	-	-
30.0	14.6	25.3	25.1	25.0	24.8	24.6	24.5	23.4	20.3	17.9	16.1	-	-	-	-
32.0	-	23.3	23.1	23.0	22.9	22.7	22.5	22.3	19.9	17.8	16.1	14.0	12.1	-	-
34.0	-	-	21.4	21.3	21.2	21.0	20.8	20.6	19.5	17.4	15.9	14.0	12.1	10.2	-
36.0	-	-	-	19.9	19.7	19.5	19.4	19.2	19.0	17.1	15.7	13.7	12.0	10.2	8.8
38.0	-	-	-	18.5	18.4	18.2	18.1	17.9	17.7	16.7	15.5	13.4	11.7	10.0	8.8
40.0	-	-	-	-	17.2	17.0	16.9	16.7	16.5	16.3	15.3	13.2	11.5	9.8	8.6
44.0	-	-	-	-	-	15.0	14.9	14.7	14.5	14.4	14.2	12.8	11.1	9.4	8.3
48.0	-	-	-	-	-	-	-	13.4	13.2	12.8	12.6	12.4	10.7	9.1	8.1
52.0	-	-	-	-	-	-	-	-	11.8	11.7	11.3	11.1	10.4	8.8	7.9
56.0	-	-	-	-	-	-	-	-	-	10.6	10.2	9.9	9.8	8.6	7.6
60.0	-	-	-	-	-	-	-	-	-	-	-	9.0	8.8	8.4	7.5
64.0	-	-	-	-	-	-	-	-	-	-	-	-	8.0	7.8	7.4
68.0	-	-	-	-	-	-	-	-	-	-	-	-	-	-	6.9
34.7 m															
20.0	39.9	-	-	-	-	-	-	-	-	-	-	-	-	-	-
22.0	36.3	35.5	34.8	-	-	-	-	-	-	-	-	-	-	-	-
24.0	32.9	32.6	31.9	31.3	30.5	-	-	-	-	-	-	-	-	-	-
26.0	29.7	29.5	29.3	28.9	28.5	27.6	26.9	-	-	-	-	-	-	-	-
28.0	27.1	26.9	26.7	26.8	26.5	25.9	25.4	23.5	-	-	-	-	-	-	-
30.0	24.8	24.7	24.5	24.6	24.4	24.1	23.7	23.1	20.4	17.7	-	-	-	-	-
32.0	-	22.7	22.6	22.7	22.5	22.3	22.1	21.6	20.2	17.7	16.0	13.9	-	-	-
34.0	-	-	20.9	21.0	20.8	20.6	20.5	20.2	19.8	17.4	15.9	13.9	11.8	10.2	-
36.0	-	-	19.4	19.5	19.4	19.2	19.0	18.8	18.6	17.1	15.7	13.7	11.9	10.2	8.6
38.0	-	-	-	18.2	18.1	17.9	17.7	17.5	17.3	16.7	15.5	13.5	11.8	10.1	8.6
40.0	-	-	-	-	16.9	16.7	16.6	16.4	16.2	16.1	15.3	13.3	11.6	9.9	8.6
44.0	-	-	-	-	-	14.8	14.7	14.5	14.3	14.1	13.9	12.9	11.1	9.5	8.3
48.0	-	-	-	-	-	-	13.2	13.1	13.0	12.5	12.3	12.1	10.8	9.2	7.9
52.0	-	-	-	-	-	-	-	-	11.6	11.2	11.0	10.8	10.4	8.9	7.6
56.0	-	-	-	-	-	-	-	-	-	10.2	9.9	9.7	9.5	8.7	7.4
60.0	-	-	-	-	-	-	-	-	-	-	-	8.8	8.6	8.4	7.1
64.0	-	-	-	-	-	-	-	-	-	-	-	-	7.8	7.6	6.7
68.0	-	-	-	-	-	-	-	-	-	-	-	-	-	6.9	6.4
71.0	-	-	-	-	-	-	-	-	-	-	-	-	-	-	6.2
37.4 m															
20.0	38.5	-	-	-	-	-	-	-	-	-	-	-	-	-	-
22.0	35.3	34.5	-	-	-	-	-	-	-	-	-	-	-	-	-
24.0	32.3	31.6	31.0	30.4	-	-	-	-	-	-	-	-	-	-	-
26.0	29.3	29.1	28.8	28.3	27.7	26.8	-	-	-	-	-	-	-	-	-
28.0	27.0	26.8	26.6	26.3	25.7	25.2	24.7	22.7	-	-	-	-	-	-	-
30.0	24.7	24.6	24.4	24.3	23.9	23.4	23.0	22.5	19.5	17.2	-	-	-	-	-
32.0	-	22.7	22.5	22.4	22.2	21.9	21.5	21.0	19.4	17.2	15.2	-	-	-	-
34.0	-	21.0	20.8	20.7	20.5	20.3	20.1	19.7	19.0	17.0	15.3	13.3	11.5	-	-
36.0	-	-	19.4	19.3	19.1	18.9	18.8	18.5	18.0	16.7	15.1	13.3	11.6	9.7	8.4
38.0	-	-	-	18.0	17.8	17.6	17.5	17.3	17.0	16.4	15.0	13.1	11.4	9.7	8.4
40.0	-	-	-	14.6	16.7	16.5	16.3	16.1	15.9	15.7	14.8	12.9	11.2	9.5	8.3
44.0	-	-	-	-	-	14.6	14.4	14.3	14.0	13.9	13.6	12.5	10.8	9.2	8.1
48.0	-	-	-	-	-	-	13.1	13.0	12.8	12.3	12.1	11.9	10.5	8.9	7.8
52.0	-	-	-	-	-	-	-	-	11.4	11.0	10.8	10.6	10.2	8.6	7.6
56.0	-	-	-	-	-	-	-	-	-	9.9	9.7	9.5	9.3	8.4	7.5
60.0	-	-	-	-	-	-	-	-	-	-	8.8	8.6	8.4	8.1	7.3
64.0	-	-	-	-	-	-	-	-	-	-	-	-	7.6	7.4	7.1
68.0	-	-	-	-	-	-	-	-	-	-	-	-	-	6.7	6.5
72.0	-	-	-	-	-	-	-	-	-	-	-	-	-	-	5.5




LIEBHERR LR 1250


Lifting capacities
Capacités

250 TON

Tragfähigkeiten
Capacités



NDL 75°



	40.4 m														
	20m	23m	26m	29m	32m	35m	38m	41m	44m	47m	50m	53m	56m	59m	62m
	t	t	t	t	t	t	t	t	t	t	t	t	t	t	t
21.0	35.6	-	-	-	-	-	-	-	-	-	-	-	-	-	-
22.0	34.0	33.2	-	-	-	-	-	-	-	-	-	-	-	-	-
24.0	31.2	30.5	29.8	28.8	-	-	-	-	-	-	-	-	-	-	-
26.0	28.8	28.2	27.5	27.3	26.7	-	-	-	-	-	-	-	-	-	-
28.0	26.3	26.1	25.5	25.4	24.8	24.2	23.8	-	-	-	-	-	-	-	-
30.0	24.1	23.9	23.7	23.6	23.1	22.6	22.1	21.6	19.2	-	-	-	-	-	-
32.0	14.5	22.1	21.9	22.0	21.6	21.1	20.7	20.2	16.9	14.9	-	-	-	-	-
34.0	-	20.4	20.2	20.4	20.2	19.8	19.4	18.9	18.5	16.8	14.9	13.0	-	-	-
36.0	-	-	18.8	18.9	18.8	18.5	18.2	17.8	17.3	16.5	14.8	13.0	11.3	9.5	-
38.0	-	-	-	17.7	17.5	17.3	17.1	16.7	16.3	15.9	14.7	12.9	11.3	9.5	8.2
40.0	-	-	-	16.5	16.4	16.2	16.0	15.8	15.4	15.0	14.5	12.7	11.1	9.4	8.2
44.0	-	-	-	-	-	14.3	14.1	14.3	13.7	13.4	13.0	12.3	10.7	9.1	8.0
48.0	-	-	-	-	-	-	12.6	12.7	12.3	12.0	11.7	11.3	10.4	8.8	7.7
52.0	-	-	-	-	-	-	-	11.1	10.9	10.7	10.5	10.2	9.9	8.6	7.5
56.0	-	-	-	-	-	-	-	-	-	9.7	9.5	9.3	9.0	8.3	7.4
60.0	-	-	-	-	-	-	-	-	-	-	8.5	8.3	8.2	7.8	7.2
64.0	-	-	-	-	-	-	-	-	-	-	-	7.1	7.4	7.1	6.8
68.0	-	-	-	-	-	-	-	-	-	-	-	-	-	6.5	6.2
72.0	-	-	-	-	-	-	-	-	-	-	-	-	-	-	5.7
43.4 m															
22.0	32.8	-	-	-	-	-	-	-	-	-	-	-	-	-	-
24.0	30.1	29.4	28.7	-	-	-	-	-	-	-	-	-	-	-	-
26.0	28.1	27.4	26.8	26.4	25.4	-	-	-	-	-	-	-	-	-	-
28.0	26.1	25.5	24.9	24.4	23.9	23.3	-	-	-	-	-	-	-	-	-
30.0	24.0	23.8	23.2	22.8	22.3	21.7	21.3	20.8	-	-	-	-	-	-	-
32.0	22.1	21.9	21.7	21.3	20.8	20.3	19.9	19.4	18.7	16.5	-	-	-	-	-
34.0	-	20.3	20.1	20.0	19.5	19.0	18.7	18.2	17.7	16.5	14.6	12.7	-	-	-
36.0	-	14.5	18.7	18.6	18.4	17.9	17.5	17.1	16.6	16.3	14.6	12.7	11.1	9.3	-
38.0	-	-	17.5	17.4	17.2	16.9	16.5	16.1	15.6	15.3	14.4	12.6	11.1	9.4	8.0
40.0	-	-	-	16.2	16.1	15.9	15.6	15.2	14.7	14.4	14.0	12.5	10.9	9.3	8.0
44.0	-	-	-	-	14.2	14.0	13.8	13.6	13.2	12.9	12.5	12.1	10.6	9.0	7.8
48.0	-	-	-	-	-	-	12.3	12.1	11.9	11.6	11.2	10.8	10.2	8.7	7.6
52.0	-	-	-	-	-	-	-	10.8	10.6	10.5	10.1	9.7	9.4	8.5	7.4
56.0	-	-	-	-	-	-	-	-	9.1	9.4	9.2	8.8	8.5	8.2	7.3
60.0	-	-	-	-	-	-	-	-	-	-	8.3	8.0	7.7	7.4	7.0
64.0	-	-	-	-	-	-	-	-	-	-	-	7.3	7.1	6.7	6.3
68.0	-	-	-	-	-	-	-	-	-	-	-	-	-	6.1	5.8
72.0	-	-	-	-	-	-	-	-	-	-	-	-	-	-	5.3
46.4 m															
23.0	30.2	-	-	-	-	-	-	-	-	-	-	-	-	-	-
24.0	28.9	28.3	-	-	-	-	-	-	-	-	-	-	-	-	-
26.0	26.7	26.1	25.5	25.3	-	-	-	-	-	-	-	-	-	-	-
28.0	24.8	24.2	23.6	23.5	22.9	22.1	-	-	-	-	-	-	-	-	-
30.0	23.1	22.6	22.0	21.9	21.4	20.9	20.4	-	-	-	-	-	-	-	-
32.0	21.4	21.1	20.6	20.5	20.0	19.5	19.1	18.6	18.1	-	-	-	-	-	-
34.0	-	19.6	19.3	19.2	18.7	18.3	17.9	17.4	17.0	16.2	14.6	-	-	-	-
36.0	-	18.3	18.1	18.1	17.6	17.2	16.8	16.3	15.9	15.5	14.6	12.4	10.7	-	-
38.0	-	-	16.8	17.0	16.6	16.2	15.8	15.4	15.0	14.6	14.2	12.4	10.7	9.2	8.2
40.0	-	-	-	15.9	15.7	15.3	14.9	14.5	14.1	13.8	13.3	12.3	10.8	9.2	8.2
44.0	-	-	-	-	13.9	13.7	13.8	13.4	12.9	12.3	11.9	11.5	10.7	8.9	7.8
48.0	-	-	-	-	-	12.2	12.0	12.1	11.7	11.0	10.6	10.3	10.0	8.7	7.6
52.0	-	-	-	-	-	-	-	10.6	10.3	10.0	9.6	9.2	8.9	8.5	7.4
56.0	-	-	-	-	-	-	-	-	9.3	9.1	8.7	8.3	8.0	7.7	7.2
60.0	-	-	-	-	-	-	-	-	-	-	8.0	7.6	7.3	6.9	6.6
64.0	-	-	-	-	-	-	-	-	-	-	-	7.0	6.6	6.3	5.9
68.0	-	-	-	-	-	-	-	-	-	-	-	-	6.1	5.7	5.4
72.0	-	-	-	-	-	-	-	-	-	-	-	-	-	-	5.0




LIEBHERR LR 1250


Lifting capacities
Capacités

250 TON

Tragfähigkeiten
Capacités



NDL 75°



	49.1 m														
	20m	23m	26m	29m	32m	35m	38m	41m	44m	47m	50m	53m	56m	59m	62m
	t	t	t	t	t	t	t	t	t	t	t	t	t	t	t
23.0	29.0	-	-	-	-	-	-	-	-	-	-	-	-	-	-
24.0	28.3	27.3	-	-	-	-	-	-	-	-	-	-	-	-	-
26.0	26.1	25.5	25.0	-	-	-	-	-	-	-	-	-	-	-	-
28.0	24.3	23.7	23.2	22.7	22.2	-	-	-	-	-	-	-	-	-	-
30.0	22.7	22.1	21.6	21.2	20.6	20.1	19.6	-	-	-	-	-	-	-	-
32.0	21.2	20.7	20.2	19.8	19.3	18.8	18.4	17.9	17.1	-	-	-	-	-	-
34.0	19.7	19.5	19.0	18.6	18.1	17.6	17.2	16.8	16.3	15.5	-	-	-	-	-
36.0	-	18.2	17.9	17.5	17.0	16.6	16.2	15.7	15.3	14.9	13.6	11.8	-	-	-
38.0	-	-	16.8	16.5	16.1	15.6	15.3	14.8	14.4	14.0	13.6	11.8	10.3	8.8	-
40.0	-	-	15.7	15.6	15.2	14.7	14.4	14.0	13.5	13.2	12.8	11.8	10.3	8.9	7.5
44.0	-	-	-	-	13.6	13.3	12.9	12.5	12.1	11.8	11.4	11.0	10.1	8.7	7.4
48.0	-	-	-	-	-	11.9	11.7	11.3	10.9	10.6	10.2	9.8	9.5	8.4	7.3
52.0	-	-	-	-	-	-	-	10.3	9.9	9.5	9.2	8.8	8.5	8.1	7.1
56.0	-	-	-	-	-	-	-	-	9.0	8.7	8.3	7.9	7.6	7.3	6.9
60.0	-	-	-	-	-	-	-	-	-	8.0	7.6	7.2	6.9	6.5	6.2
64.0	-	-	-	-	-	-	-	-	-	-	-	6.6	6.3	5.9	5.6
68.0	-	-	-	-	-	-	-	-	-	-	-	-	5.7	5.4	5.0
72.0	-	-	-	-	-	-	-	-	-	-	-	-	-	5.0	4.7
	52.1 m														
	20m	23m	26m	29m	32m	35m	38m	41m	44m	47m	50m	53m	56m	59m	62m
	t	t	t	t	t	t	t	t	t	t	t	t	t	t	t
24.0	26.8	-	-	-	-	-	-	-	-	-	-	-	-	-	-
26.0	24.8	24.5	23.7	-	-	-	-	-	-	-	-	-	-	-	-
28.0	23.0	22.7	22.2	21.8	-	-	-	-	-	-	-	-	-	-	-
30.0	21.4	21.2	20.7	20.3	19.8	19.2	-	-	-	-	-	-	-	-	-
32.0	20.1	19.9	19.3	19.0	18.5	18.0	17.6	17.0	-	-	-	-	-	-	-
34.0	18.9	18.7	18.2	17.8	17.3	16.8	16.5	16.0	15.5	14.9	-	-	-	-	-
36.0	-	17.6	17.1	16.7	16.3	15.8	15.5	15.0	14.6	14.2	13.2	11.4	-	-	-
38.0	-	14.5	16.2	15.8	15.3	14.9	14.6	14.4	13.7	13.3	12.9	11.5	10.0	-	-
40.0	-	-	15.3	15.0	14.5	14.3	14.0	13.7	13.0	12.6	12.1	11.4	10.0	8.6	7.3
44.0	-	-	-	-	13.1	13.0	12.7	12.3	11.9	11.2	10.8	10.4	9.9	8.5	7.3
48.0	-	-	-	-	-	11.5	11.5	11.1	10.7	10.1	9.6	9.2	8.9	8.2	7.1
52.0	-	-	-	-	-	-	10.2	9.7	9.5	9.2	8.7	8.3	8.0	7.6	6.9
56.0	-	-	-	-	-	-	-	-	8.5	8.2	8.0	7.4	7.1	6.8	6.4
60.0	-	-	-	-	-	-	-	-	-	7.5	7.2	6.8	6.4	6.1	5.7
64.0	-	-	-	-	-	-	-	-	-	-	6.3	6.1	5.9	5.5	5.1
68.0	-	-	-	-	-	-	-	-	-	-	-	-	5.4	5.1	4.8
72.0	-	-	-	-	-	-	-	-	-	-	-	-	-	4.8	4.5
	55.1 m														
	20m	23m	26m	29m	32m	35m	38m	41m	44m	47m	50m	53m	56m	59m	62m
	t	t	t	t	t	t	t	t	t	t	t	t	t	t	t
25.0	25.0	-	-	-	-	-	-	-	-	-	-	-	-	-	-
26.0	24.1	23.5	-	-	-	-	-	-	-	-	-	-	-	-	-
28.0	22.3	21.8	21.2	20.6	-	-	-	-	-	-	-	-	-	-	-
30.0	20.8	20.3	19.8	19.4	18.9	-	-	-	-	-	-	-	-	-	-
32.0	19.5	19.0	18.5	18.1	17.6	17.1	16.8	-	-	-	-	-	-	-	-
34.0	18.4	17.8	17.4	17.0	16.5	16.1	15.7	15.2	14.7	-	-	-	-	-	-
36.0	14.5	16.8	16.3	16.0	15.5	15.1	14.7	14.3	13.8	13.5	12.9	-	-	-	-
38.0	-	15.9	15.4	15.1	14.6	14.3	14.3	13.9	13.0	12.7	12.2	11.3	9.8	-	-
40.0	-	-	14.6	14.3	14.2	13.8	13.5	13.1	12.6	11.9	11.5	11.1	9.8	8.6	-
44.0	-	-	-	12.7	12.8	12.4	12.1	11.7	11.3	10.6	10.2	9.8	9.5	8.5	7.4
48.0	-	-	-	-	-	11.0	10.9	10.5	10.2	9.7	9.1	8.7	8.4	8.0	7.1
52.0	-	-	-	-	-	-	9.6	9.4	9.2	8.9	8.5	7.7	7.5	7.1	6.7
56.0	-	-	-	-	-	-	-	8.4	8.0	8.0	7.7	7.2	6.7	6.3	5.9
60.0	-	-	-	-	-	-	-	-	-	7.0	7.0	6.7	6.3	5.7	5.3
64.0	-	-	-	-	-	-	-	-	-	-	6.2	6.1	5.8	5.4	5.0
68.0	-	-	-	-	-	-	-	-	-	-	-	5.5	5.3	4.9	4.6
72.0	-	-	-	-	-	-	-	-	-	-	-	-	-	4.5	4.1




LIEBHERR LR 1250


Lifting capacities
Capacités

250 TON

Tragfähigkeiten
Capacités



NDL 75°



	58.1 m														
	20m	23m	26m	29m	32m	35m	38m	41m	44m	47m	50m	53m	56m	59m	62m
	t	t	t	t	t	t	t	t	t	t	t	t	t	t	t
26.0	22.6	-	-	-	-	-	-	-	-	-	-	-	-	-	-
28.0	21.0	20.8	20.3	-	-	-	-	-	-	-	-	-	-	-	-
30.0	19.5	19.4	18.9	18.5	17.8	-	-	-	-	-	-	-	-	-	-
32.0	18.3	18.1	17.6	17.3	16.8	16.3	15.6	-	-	-	-	-	-	-	-
34.0	17.2	17.0	16.5	16.2	15.7	15.2	14.9	14.4	-	-	-	-	-	-	-
36.0	16.2	16.0	15.6	15.2	14.8	14.4	14.3	14.0	13.1	12.7	-	-	-	-	-
38.0	-	15.2	14.7	14.3	13.9	13.9	13.6	13.2	12.5	11.9	11.5	10.6	-	-	-
40.0	-	-	13.9	13.6	13.1	13.1	12.8	12.4	12.0	11.2	10.8	10.4	9.3	8.0	-
44.0	-	-	-	12.2	11.8	11.7	11.5	11.1	10.7	10.2	9.5	9.1	8.8	8.1	6.8
48.0	-	-	-	-	10.4	10.6	10.3	10.0	9.6	9.3	8.8	8.1	7.8	7.4	6.7
52.0	-	-	-	-	-	-	9.0	9.0	8.6	8.4	8.0	7.5	6.9	6.5	6.2
56.0	-	-	-	-	-	-	-	7.9	7.8	7.6	7.2	6.9	6.4	5.8	5.4
60.0	-	-	-	-	-	-	-	-	-	6.8	6.5	6.2	5.9	5.5	5.0
64.0	-	-	-	-	-	-	-	-	-	-	5.9	5.6	5.3	5.0	4.7
68.0	-	-	-	-	-	-	-	-	-	-	-	5.1	4.8	4.5	4.2
72.0	-	-	-	-	-	-	-	-	-	-	-	-	-	4.0	3.7
	60.8 m														
	20m	23m	26m	29m	32m	35m	38m	41m	44m	47m	50m	53m	56m	59m	62m
	t	t	t	t	t	t	t	t	t	t	t	t	t	t	t
26.0	21.9	-	-	-	-	-	-	-	-	-	-	-	-	-	-
28.0	20.5	20.0	-	-	-	-	-	-	-	-	-	-	-	-	-
30.0	19.1	18.6	18.1	17.7	-	-	-	-	-	-	-	-	-	-	-
32.0	17.9	17.4	16.9	16.5	16.1	15.5	-	-	-	-	-	-	-	-	-
34.0	16.8	16.3	15.9	15.5	15.0	14.6	14.3	13.6	-	-	-	-	-	-	-
36.0	15.9	15.4	14.9	14.6	14.4	14.1	13.8	13.2	12.4	11.8	-	-	-	-	-
38.0	-	14.5	14.4	14.1	13.7	13.3	13.0	12.6	11.7	11.3	10.9	-	-	-	-
40.0	-	13.8	13.4	13.4	13.0	12.5	12.2	11.8	11.3	10.6	10.2	9.8	8.7	-	-
44.0	-	-	-	11.8	11.6	11.2	10.9	10.6	10.2	9.6	9.0	8.6	8.3	7.6	6.5
48.0	-	-	-	-	10.2	10.1	9.9	9.5	9.1	8.8	8.3	7.6	7.3	6.9	6.4
52.0	-	-	-	-	-	8.4	8.7	8.6	8.2	7.9	7.6	7.1	6.4	6.1	5.7
56.0	-	-	-	-	-	-	-	7.5	7.4	7.2	6.8	6.5	6.0	5.5	5.0
60.0	-	-	-	-	-	-	-	-	6.5	6.5	6.2	5.8	5.6	5.2	4.8
64.0	-	-	-	-	-	-	-	-	-	-	5.6	5.2	5.0	4.7	4.3
68.0	-	-	-	-	-	-	-	-	-	-	-	4.7	4.5	4.1	3.8
72.0	-	-	-	-	-	-	-	-	-	-	-	-	4.0	3.7	3.4
	63.8 m														
	20m	23m	26m	29m	32m	35m	38m	41m	44m	47m	50m	53m	56m	59m	62m
	t	t	t	t	t	t	t	t	t	t	t	t	t	t	t
27.0	19.9	-	-	-	-	-	-	-	-	-	-	-	-	-	-
28.0	19.1	18.9	-	-	-	-	-	-	-	-	-	-	-	-	-
30.0	17.8	17.7	17.2	-	-	-	-	-	-	-	-	-	-	-	-
32.0	16.6	16.5	16.0	15.7	15.2	-	-	-	-	-	-	-	-	-	-
34.0	15.6	15.5	15.0	14.7	14.2	14.2	13.7	-	-	-	-	-	-	-	-
36.0	14.7	14.6	14.1	13.8	13.3	13.3	13.0	12.3	11.5	-	-	-	-	-	-
38.0	13.9	13.8	13.3	13.0	12.5	12.6	12.3	11.8	10.9	10.6	9.9	-	-	-	-
40.0	-	13.0	12.6	12.3	11.8	11.8	11.5	11.1	10.7	9.9	9.5	9.0	-	-	-
44.0	-	-	-	11.0	10.6	10.6	10.3	9.9	9.5	9.2	8.4	8.0	7.7	7.2	6.4
48.0	-	-	-	-	9.6	9.5	9.3	8.9	8.5	8.3	7.9	7.2	6.7	6.3	6.0
52.0	-	-	-	-	-	8.3	8.3	8.0	7.7	7.4	7.0	6.7	6.2	5.6	5.2
56.0	-	-	-	-	-	-	-	7.2	6.9	6.6	6.3	6.0	5.7	5.3	4.8
60.0	-	-	-	-	-	-	-	-	6.2	6.0	5.7	5.3	5.1	4.7	4.4
64.0	-	-	-	-	-	-	-	-	-	5.5	5.1	4.8	4.5	4.2	3.9
68.0	-	-	-	-	-	-	-	-	-	-	-	4.3	4.0	3.7	3.4
72.0	-	-	-	-	-	-	-	-	-	-	-	-	3.6	3.3	3.0




LIEBHERR LR 1250

Working ranges
Portées

250 TON

Arbeitsbereiche
Werkbereich

NDL 65°

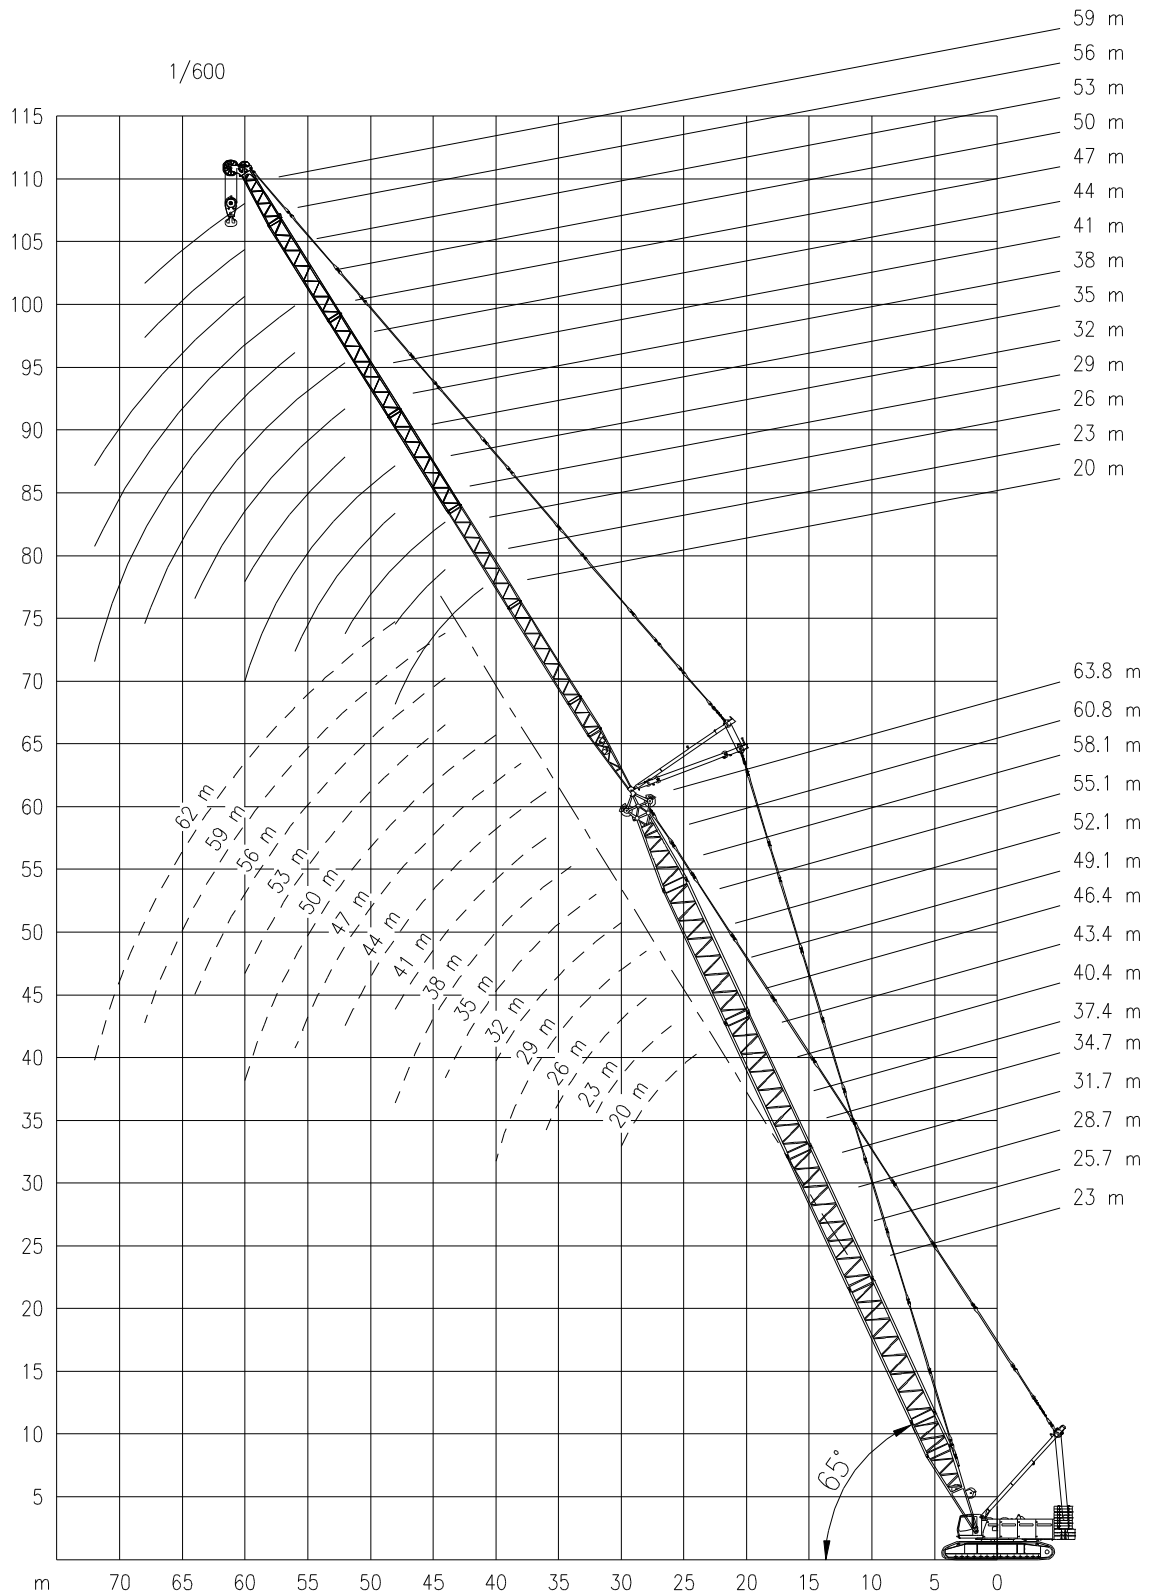




LIEBHERR LR 1250


Lifting capacities
Capacités

250 TON

Tragfähigkeiten
Capacités



NDL 65°



	23.0 m														
	20m	23m	26m	29m	32m	35m	38m	41m	44m	47m	50m	53m	56m	59m	62m
	t	t	t	t	t	t	t	t	t	t	t	t	t	t	t
24.0	32.2	-	-	-	-	-	-	-	-	-	-	-	-	-	-
26.0	29.1	30.6	-	-	-	-	-	-	-	-	-	-	-	-	-
28.0	26.5	27.8	26.3	25.7	-	-	-	-	-	-	-	-	-	-	-
30.0	24.3	25.4	24.1	23.9	23.9	-	-	-	-	-	-	-	-	-	-
32.0	-	23.4	22.2	22.0	22.0	21.8	-	-	-	-	-	-	-	-	-
34.0	-	-	20.6	20.4	20.4	20.2	20.0	-	-	-	-	-	-	-	-
36.0	-	-	19.1	19.0	19.0	18.7	18.6	18.1	-	-	-	-	-	-	-
38.0	-	-	-	17.7	17.7	17.5	17.3	17.4	17.1	16.9	-	-	-	-	-
40.0	-	-	-	16.6	16.6	16.4	16.2	16.2	16.0	15.9	15.5	-	-	-	-
44.0	-	-	-	-	-	14.5	14.3	14.3	14.1	14.0	13.8	13.2	11.4	9.5	-
48.0	-	-	-	-	-	-	12.8	12.7	12.5	12.4	12.2	12.0	11.1	9.4	8.1
52.0	-	-	-	-	-	-	-	11.2	11.1	10.9	10.7	10.5	9.1	7.9	7.9
56.0	-	-	-	-	-	-	-	-	10.0	9.8	9.6	9.4	8.9	7.6	7.6
60.0	-	-	-	-	-	-	-	-	-	8.9	8.7	8.5	8.3	7.4	7.4
64.0	-	-	-	-	-	-	-	-	-	-	-	7.7	7.5	7.1	7.1
68.0	-	-	-	-	-	-	-	-	-	-	-	-	6.8	6.6	6.6
72.0	-	-	-	-	-	-	-	-	-	-	-	-	-	6.0	6.0
	25.7 m														
	20m	23m	26m	29m	32m	35m	38m	41m	44m	47m	50m	53m	56m	59m	62m
	t	t	t	t	t	t	t	t	t	t	t	t	t	t	t
25.0	30.5	-	-	-	-	-	-	-	-	-	-	-	-	-	-
26.0	29.0	28.7	-	-	-	-	-	-	-	-	-	-	-	-	-
28.0	26.6	26.4	26.2	-	-	-	-	-	-	-	-	-	-	-	-
30.0	24.4	24.3	24.1	23.9	-	-	-	-	-	-	-	-	-	-	-
32.0	22.5	22.4	22.2	22.1	21.9	-	-	-	-	-	-	-	-	-	-
34.0	-	20.7	20.6	20.4	20.2	20.0	19.6	-	-	-	-	-	-	-	-
36.0	-	-	19.1	19.0	18.8	18.6	18.5	18.2	-	-	-	-	-	-	-
38.0	-	-	17.9	17.8	17.6	17.4	17.2	17.0	16.8	-	-	-	-	-	-
40.0	-	-	-	16.6	16.4	16.2	16.1	15.9	15.7	15.5	-	-	-	-	-
44.0	-	-	-	-	14.5	14.5	14.5	14.3	14.1	14.0	13.4	12.9	11.0	-	-
48.0	-	-	-	-	-	-	12.9	12.7	12.5	12.4	12.2	11.7	10.9	9.2	8.1
52.0	-	-	-	-	-	-	-	11.4	11.2	11.1	10.9	10.5	10.2	9.0	8.0
56.0	-	-	-	-	-	-	-	-	10.1	10.0	9.8	9.6	9.2	8.8	7.8
60.0	-	-	-	-	-	-	-	-	-	8.9	8.7	8.5	8.0	7.7	7.7
64.0	-	-	-	-	-	-	-	-	-	-	7.9	7.7	7.5	7.1	7.1
68.0	-	-	-	-	-	-	-	-	-	-	-	6.8	6.6	6.6	6.6
72.0	-	-	-	-	-	-	-	-	-	-	-	-	-	6.0	6.0
	28.7 m														
	20m	23m	26m	29m	32m	35m	38m	41m	44m	47m	50m	53m	56m	59m	62m
	t	t	t	t	t	t	t	t	t	t	t	t	t	t	t
26.0	27.9	-	-	-	-	-	-	-	-	-	-	-	-	-	-
28.0	25.4	25.4	-	-	-	-	-	-	-	-	-	-	-	-	-
30.0	23.3	23.3	23.0	-	-	-	-	-	-	-	-	-	-	-	-
32.0	21.5	21.4	21.2	21.0	20.7	-	-	-	-	-	-	-	-	-	-
34.0	-	19.9	19.6	19.5	19.5	19.2	-	-	-	-	-	-	-	-	-
36.0	-	18.5	18.3	18.1	18.1	17.8	17.7	-	-	-	-	-	-	-	-
38.0	-	-	17.0	16.9	16.9	16.6	16.5	16.5	-	-	-	-	-	-	-
40.0	-	-	-	15.8	15.8	15.6	15.4	15.4	15.2	14.8	-	-	-	-	-
44.0	-	-	-	-	13.9	13.7	13.6	13.6	13.4	13.2	13.0	12.6	-	-	-
48.0	-	-	-	-	-	12.2	12.1	12.1	11.9	11.7	11.5	11.3	10.8	9.1	7.9
52.0	-	-	-	-	-	-	10.8	10.6	10.5	10.2	10.0	9.9	9.9	8.9	7.9
56.0	-	-	-	-	-	-	-	9.6	9.4	9.2	9.0	8.8	8.6	7.7	7.7
60.0	-	-	-	-	-	-	-	-	8.3	8.1	7.9	7.9	7.7	7.5	7.5
64.0	-	-	-	-	-	-	-	-	-	7.3	7.2	7.2	6.9	6.7	6.7
68.0	-	-	-	-	-	-	-	-	-	-	6.5	6.3	6.1	6.1	6.1
72.0	-	-	-	-	-	-	-	-	-	-	-	5.6	5.4	5.4	5.4
	31.7 m														
	20m	23m	26m	29m	32m	35m	38m	41m	44m	47m	50m	53m	56m	59m	62m
	t	t	t	t	t	t	t	t	t	t	t	t	t	t	t
27.0	26.5	-	-	-	-	-	-	-	-	-	-	-	-	-	-
28.0	25.4	-	-	-	-	-	-	-	-	-	-	-	-	-	-
30.0	23.3	23.1	22.5	-	-	-	-	-	-	-	-	-	-	-	-
32.0	21.5	21.3	21.1	21.0	-	-	-	-	-	-	-	-	-	-	-
34.0	19.9	19.7	19.5	19.4	19.2	-	-	-	-	-	-	-	-	-	-
36.0	-	18.4	18.2	18.0	17.8	17.6	-	-	-	-	-	-	-	-	-
38.0	-	17.1	17.0	16.8	16.6	16.4	16.2	15.7	-	-	-	-	-	-	-
40.0	-	-	15.9	15.8	15.6	15.3	15.2	15.0	14.7	-	-	-	-	-	-
44.0	-	-	-	14.1	14.0	13.8	13.7	13.5	13.3	13.1	12.6	-	-	-	-
48.0	-	-	-	-	-	12.3	12.2	12.0	11.8	11.6	11.4	10.9	10.6	8.9	-
52.0	-	-	-	-	-	-	10.9	10.7	10.5	10.4	10.2	10.0	9.9	8.8	7.7
56.0	-	-	-	-	-	-	-	9.5	9.3	9.2	9.0	8.8	8.2	7.6	7.6
60.0	-	-	-	-	-	-	-	-	8.4	8.2	8.1	7.9	7.4	7.1	7.1
64.0	-	-	-	-	-	-	-	-	-	7.5	7.3	7.1	6.9	6.4	6.4
68.0	-	-	-	-	-	-	-	-	-	-	6.5	6.3	6.0	6.0	6.0
72.0	-	-	-	-	-	-	-	-	-	-	-	5.6	5.4	5.4	5.4




LIEBHERR LR 1250


Lifting capacities
Capacités

250 TON

Tragfähigkeiten
Capacités



NDL 65°



	34.7 m														
	20m	23m	26m	29m	32m	35m	38m	41m	44m	47m	50m	53m	56m	59m	62m
	t	t	t	t	t	t	t	t	t	t	t	t	t	t	t
29.0	23.0	-	-	-	-	-	-	-	-	-	-	-	-	-	-
30.0	22.0	22.0	-	-	-	-	-	-	-	-	-	-	-	-	-
32.0	20.3	20.2	20.0	-	-	-	-	-	-	-	-	-	-	-	-
34.0	18.8	18.7	18.5	18.6	-	-	-	-	-	-	-	-	-	-	-
36.0	17.4	17.4	17.2	17.2	17.0	-	-	-	-	-	-	-	-	-	-
38.0	-	16.2	16.0	16.1	15.8	15.6	15.3	-	-	-	-	-	-	-	-
40.0	-	-	15.0	14.8	14.6	14.4	14.5	-	-	-	-	-	-	-	-
44.0	-	-	-	13.3	13.0	12.8	12.6	12.7	12.5	12.3	11.7	-	-	-	-
48.0	-	-	-	-	-	11.4	11.2	11.3	11.0	10.9	10.6	10.3	10.0	-	-
52.0	-	-	-	-	-	-	10.0	10.1	9.8	9.7	9.5	9.2	8.9	8.6	7.4
56.0	-	-	-	-	-	-	-	9.1	8.8	8.7	8.5	8.2	8.0	7.7	7.3
60.0	-	-	-	-	-	-	-	-	-	7.8	7.6	7.4	7.2	6.9	6.5
64.0	-	-	-	-	-	-	-	-	-	-	6.9	6.7	6.5	6.2	5.9
68.0	-	-	-	-	-	-	-	-	-	-	-	6.0	5.8	5.6	5.3
72.0	-	-	-	-	-	-	-	-	-	-	-	-	-	5.0	4.8
	37.4 m														
30.0	22.2	-	-	-	-	-	-	-	-	-	-	-	-	-	-
32.0	20.5	20.2	-	-	-	-	-	-	-	-	-	-	-	-	-
34.0	19.0	18.7	18.5	18.1	-	-	-	-	-	-	-	-	-	-	-
36.0	17.6	17.4	17.2	17.1	16.8	-	-	-	-	-	-	-	-	-	-
38.0	-	16.3	16.1	15.9	15.7	15.4	-	-	-	-	-	-	-	-	-
40.0	-	15.2	15.0	14.9	14.7	14.5	14.5	-	-	-	-	-	-	-	-
44.0	-	-	-	13.4	13.2	13.0	12.9	12.7	12.4	11.9	-	-	-	-	-
48.0	-	-	-	-	11.7	11.6	11.4	11.2	11.0	10.9	10.5	9.8	-	-	-
52.0	-	-	-	-	-	10.3	10.2	10.0	9.8	9.7	9.4	9.1	8.6	8.0	7.3
56.0	-	-	-	-	-	-	-	9.0	8.8	8.7	8.5	8.2	7.9	7.3	6.8
60.0	-	-	-	-	-	-	-	-	8.0	7.8	7.6	7.4	7.1	6.8	6.2
64.0	-	-	-	-	-	-	-	-	-	-	6.9	6.7	6.5	6.1	5.8
68.0	-	-	-	-	-	-	-	-	-	-	-	6.0	5.9	5.5	5.2
72.0	-	-	-	-	-	-	-	-	-	-	-	-	5.3	5.0	4.7
	40.4 m														
31.0	20.1	-	-	-	-	-	-	-	-	-	-	-	-	-	-
32.0	19.3	-	-	-	-	-	-	-	-	-	-	-	-	-	-
34.0	17.9	17.6	17.3	-	-	-	-	-	-	-	-	-	-	-	-
36.0	16.6	16.4	16.1	16.2	-	-	-	-	-	-	-	-	-	-	-
38.0	15.5	15.2	15.0	15.1	14.8	-	-	-	-	-	-	-	-	-	-
40.0	-	14.3	14.0	14.1	13.8	13.6	-	-	-	-	-	-	-	-	-
44.0	-	-	12.3	12.4	12.2	11.9	12.1	11.7	11.3	-	-	-	-	-	-
48.0	-	-	-	-	10.8	10.6	10.7	10.5	10.1	9.8	9.4	8.8	-	-	-
52.0	-	-	-	-	-	9.5	9.5	9.3	9.1	8.8	8.4	8.0	7.7	7.4	-
56.0	-	-	-	-	-	-	8.6	8.4	8.1	7.9	7.6	7.2	6.9	6.5	6.2
60.0	-	-	-	-	-	-	-	-	7.3	7.2	6.8	6.5	6.2	5.8	5.5
64.0	-	-	-	-	-	-	-	-	-	6.5	6.2	5.8	5.6	5.2	4.9
68.0	-	-	-	-	-	-	-	-	-	-	-	5.3	5.0	4.7	4.3
72.0	-	-	-	-	-	-	-	-	-	-	-	-	4.6	4.2	3.9
	43.4 m														
32.0	19.2	-	-	-	-	-	-	-	-	-	-	-	-	-	-
34.0	17.8	17.5	-	-	-	-	-	-	-	-	-	-	-	-	-
36.0	16.5	16.3	16.0	-	-	-	-	-	-	-	-	-	-	-	-
38.0	15.4	15.2	15.0	14.8	-	-	-	-	-	-	-	-	-	-	-
40.0	14.5	14.5	14.3	14.2	13.8	13.0	-	-	-	-	-	-	-	-	-
44.0	-	-	12.6	12.5	12.3	12.0	11.7	11.3	-	-	-	-	-	-	-
48.0	-	-	-	11.1	10.9	10.7	10.5	10.1	9.7	9.5	8.6	-	-	-	-
52.0	-	-	-	-	9.8	9.6	9.4	9.1	8.8	8.5	8.1	7.8	7.5	-	-
56.0	-	-	-	-	-	-	8.5	8.3	7.9	7.7	7.3	7.0	6.7	6.3	6.0
60.0	-	-	-	-	-	-	-	7.5	7.2	6.9	6.6	6.2	6.0	5.6	5.3
64.0	-	-	-	-	-	-	-	-	-	6.3	6.0	5.6	5.4	5.0	4.7
68.0	-	-	-	-	-	-	-	-	-	-	5.4	5.1	4.8	4.5	4.2
72.0	-	-	-	-	-	-	-	-	-	-	-	4.6	4.4	4.0	3.7
	46.4 m														
34.0	16.5	-	-	-	-	-	-	-	-	-	-	-	-	-	-
36.0	15.4	14.9	-	-	-	-	-	-	-	-	-	-	-	-	-
38.0	14.3	14.0	13.5	13.4	-	-	-	-	-	-	-	-	-	-	-
40.0	13.4	13.1	12.8	12.7	12.2	-	-	-	-	-	-	-	-	-	-
44.0	-	11.5	11.3	11.4	10.9	10.5	10.5	-	-	-	-	-	-	-	-
48.0	-	-	-	10.1	9.8	9.4	9.4	9.0	8.6	8.3	-	-	-	-	-
52.0	-	-	-	-	8.8	8.5	8.5	8.1	7.7	7.4	7.0	6.6	-	-	-
56.0	-	-	-	-	-	-	7.7	7.3	6.9	6.6	6.3	5.9	5.6	5.2	4.8
60.0	-	-	-	-	-	-	-	6.6	6.3	6.0	5.6	5.2	5.0	4.6	4.2
64.0	-	-	-	-	-	-	-	-	5.7	5.4	5.0	4.7	4.4	4.0	3.7
68.0	-	-	-	-	-	-	-	-	-	-	4.6	4.2	3.9	3.6	3.2
72.0	-	-	-	-	-	-	-	-	-	-	-	3.8	3.5	3.1	2.8




LIEBHERR LR 1250


Lifting capacities
Capacités

250 TON

Tragfähigkeiten
Capacités



NDL 65°



	49.1 m														
	20m	23m	26m	29m	32m	35m	38m	41m	44m	47m	50m	53m	56m	59m	62m
	t	t	t	t	t	t	t	t	t	t	t	t	t	t	t
35.0	15.7	-	-	-	-	-	-	-	-	-	-	-	-	-	-
36.0	15.2	14.7	-	-	-	-	-	-	-	-	-	-	-	-	-
38.0	14.5	14.2	13.7	-	-	-	-	-	-	-	-	-	-	-	-
40.0	13.7	13.4	13.0	12.7	-	-	-	-	-	-	-	-	-	-	-
44.0	-	11.9	11.6	11.3	10.9	10.5	9.8	-	-	-	-	-	-	-	-
48.0	-	-	10.4	10.2	9.9	9.4	9.2	8.8	8.4	-	-	-	-	-	-
52.0	-	-	-	-	8.9	8.5	8.2	7.9	7.5	7.2	6.9	6.0	-	-	-
56.0	-	-	-	-	-	7.7	7.5	7.1	6.7	6.5	6.1	5.8	5.5	5.2	-
60.0	-	-	-	-	-	-	6.8	6.4	6.1	5.8	5.5	5.1	4.9	4.5	4.2
64.0	-	-	-	-	-	-	-	-	5.5	5.3	4.9	4.6	4.3	4.0	3.7
68.0	-	-	-	-	-	-	-	-	-	4.8	4.4	4.1	3.8	3.5	3.2
72.0	-	-	-	-	-	-	-	-	-	-	-	3.7	3.4	3.1	2.8
52.1 m															
36.0	13.6	-	-	-	-	-	-	-	-	-	-	-	-	-	-
38.0	12.7	12.6	-	-	-	-	-	-	-	-	-	-	-	-	-
40.0	12.0	11.8	11.4	-	-	-	-	-	-	-	-	-	-	-	-
44.0	-	10.6	10.1	9.8	9.4	9.3	-	-	-	-	-	-	-	-	-
48.0	-	-	9.1	8.8	8.4	8.3	8.0	7.6	-	-	-	-	-	-	-
52.0	-	-	-	8.0	7.5	7.5	7.2	6.8	6.4	6.1	5.7	-	-	-	-
56.0	-	-	-	-	-	6.7	6.5	6.1	5.7	5.4	5.0	4.7	4.4	-	-
60.0	-	-	-	-	-	-	5.9	5.5	5.1	4.8	4.4	4.1	3.8	3.4	3.1
64.0	-	-	-	-	-	-	-	5.0	4.6	4.3	3.9	3.6	3.3	2.9	2.6
68.0	-	-	-	-	-	-	-	-	-	3.9	3.5	3.1	2.9	2.5	2.2
72.0	-	-	-	-	-	-	-	-	-	-	3.1	2.8	2.5	2.1	1.8
55.1 m															
37.0	12.8	-	-	-	-	-	-	-	-	-	-	-	-	-	-
38.0	12.7	-	-	-	-	-	-	-	-	-	-	-	-	-	-
40.0	12.0	11.6	10.7	-	-	-	-	-	-	-	-	-	-	-	-
44.0	10.7	10.4	10.0	9.7	9.3	-	-	-	-	-	-	-	-	-	-
48.0	-	9.3	8.9	8.7	8.3	7.9	7.6	6.7	-	-	-	-	-	-	-
52.0	-	-	-	7.8	7.5	7.1	6.8	6.5	6.1	5.8	-	-	-	-	-
56.0	-	-	-	-	6.8	6.4	6.1	5.8	5.4	5.2	4.8	4.4	3.6	-	-
60.0	-	-	-	-	-	-	5.5	5.2	4.8	4.6	4.2	3.9	3.9	3.3	2.9
64.0	-	-	-	-	-	-	-	4.7	4.3	4.1	3.7	3.4	3.1	2.8	2.5
68.0	-	-	-	-	-	-	-	-	3.9	3.6	3.3	3.0	2.7	2.4	2.1
72.0	-	-	-	-	-	-	-	-	-	-	2.9	2.6	2.3	2.0	1.7
58.1 m															
38.0	10.6	-	-	-	-	-	-	-	-	-	-	-	-	-	-
40.0	10.1	9.9	-	-	-	-	-	-	-	-	-	-	-	-	-
44.0	8.9	8.8	8.4	8.1	-	-	-	-	-	-	-	-	-	-	-
48.0	-	7.9	7.5	7.2	6.7	6.7	6.4	-	-	-	-	-	-	-	-
52.0	-	-	6.7	6.4	6.0	6.0	5.7	5.3	4.9	-	-	-	-	-	-
56.0	-	-	-	-	5.4	5.3	5.0	4.7	4.3	4.0	3.6	3.2	-	-	-
60.0	-	-	-	-	-	4.8	4.5	4.1	3.8	3.5	3.1	2.8	2.5	2.1	-
64.0	-	-	-	-	-	-	-	3.7	3.3	3.0	2.7	2.3	2.0	1.7	1.3
68.0	-	-	-	-	-	-	-	-	2.9	2.7	2.3	1.9	1.7	1.3	-
72.0	-	-	-	-	-	-	-	-	-	2.3	2.0	1.6	1.3	1.0	-
60.8 m															
40.0	10.3	-	-	-	-	-	-	-	-	-	-	-	-	-	-
44.0	9.2	8.8	8.4	7.7	-	-	-	-	-	-	-	-	-	-	-
48.0	-	7.9	7.5	7.2	6.9	6.5	-	-	-	-	-	-	-	-	-
52.0	-	-	6.7	6.5	6.1	5.7	5.5	5.1	4.2	-	-	-	-	-	-
56.0	-	-	-	5.8	5.5	5.1	4.9	4.5	4.2	3.9	3.5	-	-	-	-
60.0	-	-	-	-	-	4.6	4.3	4.0	3.6	3.4	3.0	2.7	2.4	1.5	-
64.0	-	-	-	-	-	-	3.9	3.5	3.2	2.9	2.6	2.3	2.0	1.7	1.3
68.0	-	-	-	-	-	-	-	3.1	2.8	2.6	2.2	1.9	1.6	1.3	-
72.0	-	-	-	-	-	-	-	-	-	2.2	1.9	1.5	1.3	-	-
63.8 m															
41.0	9.1	-	-	-	-	-	-	-	-	-	-	-	-	-	-
44.0	8.3	7.9	7.5	-	-	-	-	-	-	-	-	-	-	-	-
48.0	7.4	7.1	6.7	6.4	6.0	-	-	-	-	-	-	-	-	-	-
52.0	-	-	6.0	5.7	5.4	5.0	4.7	4.3	-	-	-	-	-	-	-
56.0	-	-	-	5.1	4.8	4.4	4.2	3.8	3.4	3.2	-	-	-	-	-
60.0	-	-	-	-	4.3	3.9	3.7	3.3	3.0	2.7	2.4	2.0	1.7	-	-
64.0	-	-	-	-	-	-	3.2	2.9	2.6	2.3	2.0	1.6	1.4	1.0	-
68.0	-	-	-	-	-	-	-	2.5	2.2	1.9	1.6	1.3	1.0	-	-
72.0	-	-	-	-	-	-	-	-	1.9	1.6	1.3	-	-	-	-




LIEBHERR LR 1250

250 TON

**Working speeds
Vitesses de travail**

**Arbeitsgeschwindigkeiten
Werksnelheden**


Mechanisms Mécanismes Antriebe Aandrijvingen	Speeds Vitesses Geschwindigkeiten Snelheden	Rope diameter Diamètre du câble Seildurchmesser Kabeldiameter	Single line pull Effort sur brin simple Zulässiger Seilzug je strang Toegelaten trekkraft / part	Length of ropes Longueur des cables Länge der Seile Kabellengte
Main hoist Levage sur flèche Hubwerk 1 Hijsslier 1	Max 115 m/min	28 mm	150 kN	480 m
Auxiliary hoist Levage auxiliaire Hubwerk 2 Hijsslier 2	Max 115 m/min	28 mm	150 kN	480 m
Boom hoist Relevage de flèche Einziehwerk Toplier hoofdmast	Max 85 m/min	24 mm	180 kN	320 m
Luffing hoist Relevage de fléchette Wippwerk Toplier wipper	Max 72 m/min	20 mm	105 kN	285 m
Slewing gear Orientation Drehwerk Zwenkwerk	0 – 1.84 RPM			
Travel speed Vitesse sur route Fahrgeschwindigkeit Rijsnelheid	0 – 1.3 km/h			



Capacity Max. 29.3 t
Capacité Max. 29.3 t
Tragfähigkeit Max. 29.3 t
Capaciteit Max. 29.3 t

L = 2466 mm

**Hook Block / Crane hook
Crochet mouflé / Crochet simple**



**Unterflasche / Hakengehänge
Kraanblok / Kraanhaak**

Capacity Capacité Tragfähigkeit Capaciteit	Number of sheaves Nombre de poulies Anzahl der Rollen Aantal schijven	Number of lines Nombre de brins Strangzahl Aantal parten	Weight Poids Gewicht Gewicht	"B"
SWL 210 t	8	17	5700 kg	4.3 m
SWL 150 t	5	11	4000 kg	4.3 m
SWL 100 t	3	7	3300 kg	3.0 m
SWL 45 t	1	3	2500 kg	2.7 m
SWL 16 t	-	1	1100 kg	2.5 m